


輕觸開關產品型號說明

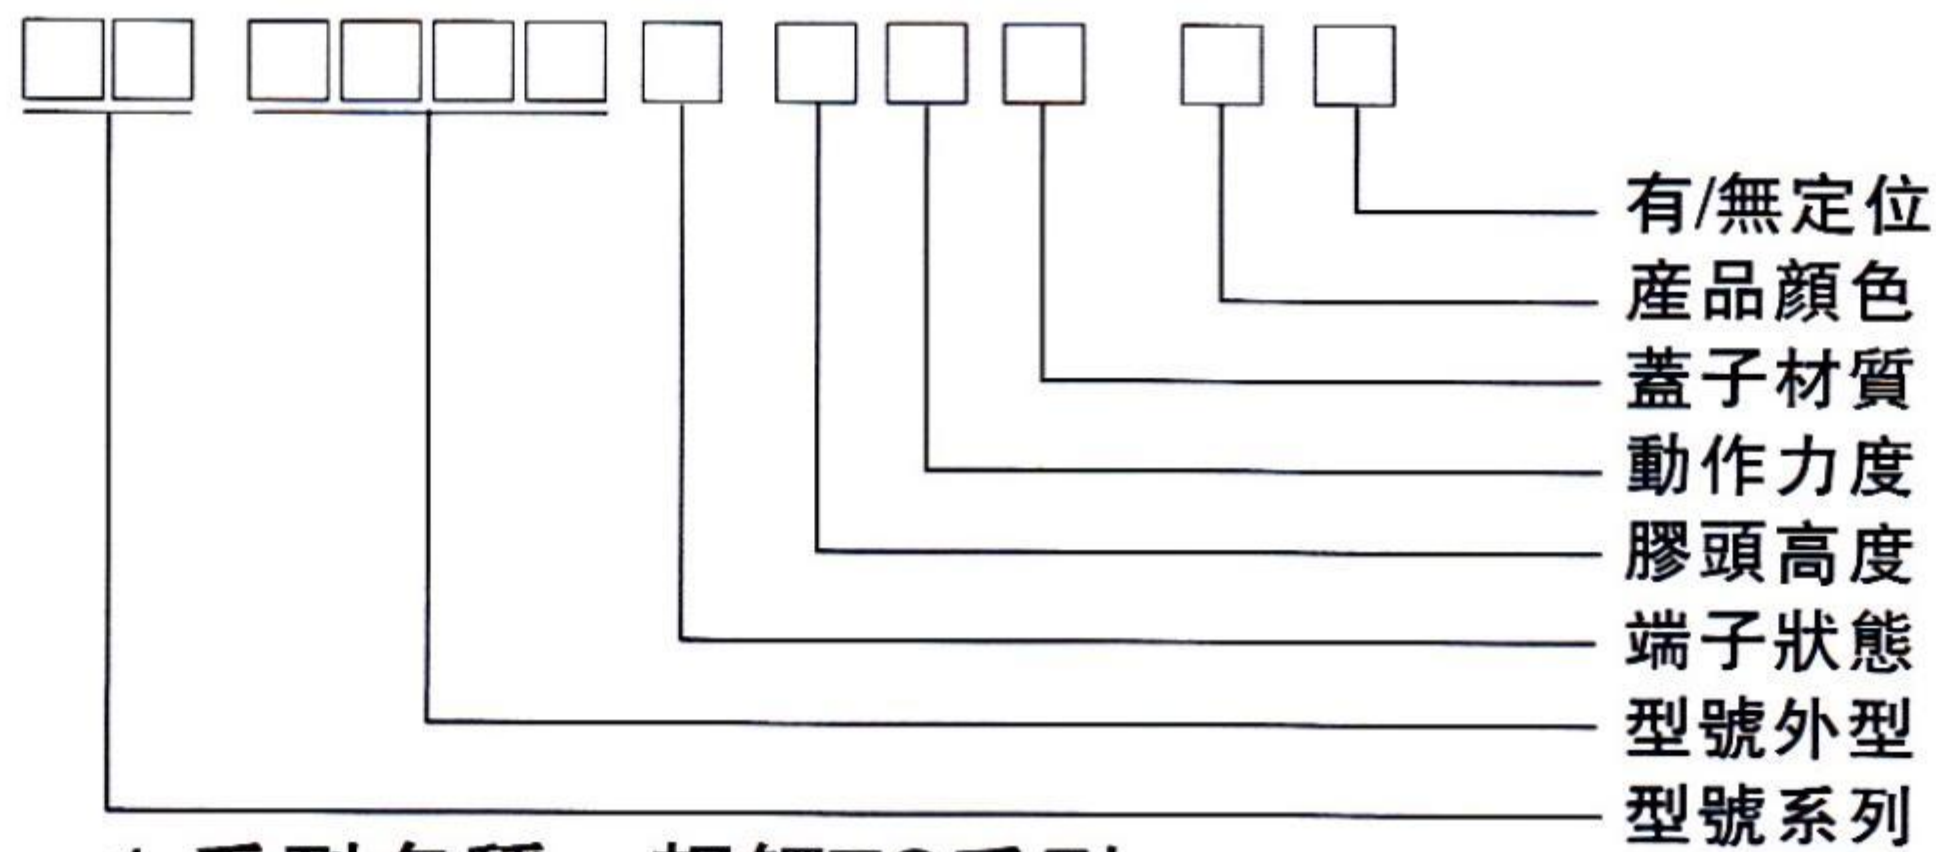

1.系列名稱：輕觸TS系列

2.型號外型：

型號	06、27、16、36	12	03、23	04
外型尺寸	6×6mm	12×12mm	3.5×6mm	4.5×4.5mm
型號	1113、1114	1112	1157	1187
外型尺寸				
型號	1106、1107、1108	1410、1420	1500、1600	
外型尺寸				

3.端子狀態：

	V(插裝)	貼裝			H (直播90度)	Y (直播180度)	U (鉤形)	G (平脚)
代號及 狀態 示意圖		M ₁	M ₂	M ₃				
		8.0	9.0	10				
								

4.膠頭高度：mm

代號	A	B	C	D	E	F	G	X	I	J	K	N	Y	T	O	P
高度	4.3	5.0	7.0	9.5	13	1.55	1.65	2.5	3.1	3.8	4.5	6.0	7.3	7.3(方)	8.0	9.0
代號	R	S	U	V	W	Z	L	Q	C1	N1	C2					
高度	10	11.5	12	12.5	15	2.0	13.5	1.8	7.5	6.5	7.4					

5.動作力度：gf

代號	I	L	S	Q	H	U	V	R	C	K
動作力	100	130	160	180	250	320	500	60	360	70-80

6.蓋子材質：

























代號	P	M
材質	塑膠	鐵

7.產品顏色：

代號	B	W	I	N	P	K	O	Z
顏色	全黑	全白	白頭黑座	黑頭白座	紅頭白座	紅頭黑座	灰頭黑座	藍頭黑座
代號	Y	X	C	T				
顏色	黃頭黑座	棕頭黑座	棕頭白座	黑頭灰座				


8. 產品有無定位：有定位E，無定位無。

額定負荷：DC 12V 50mA

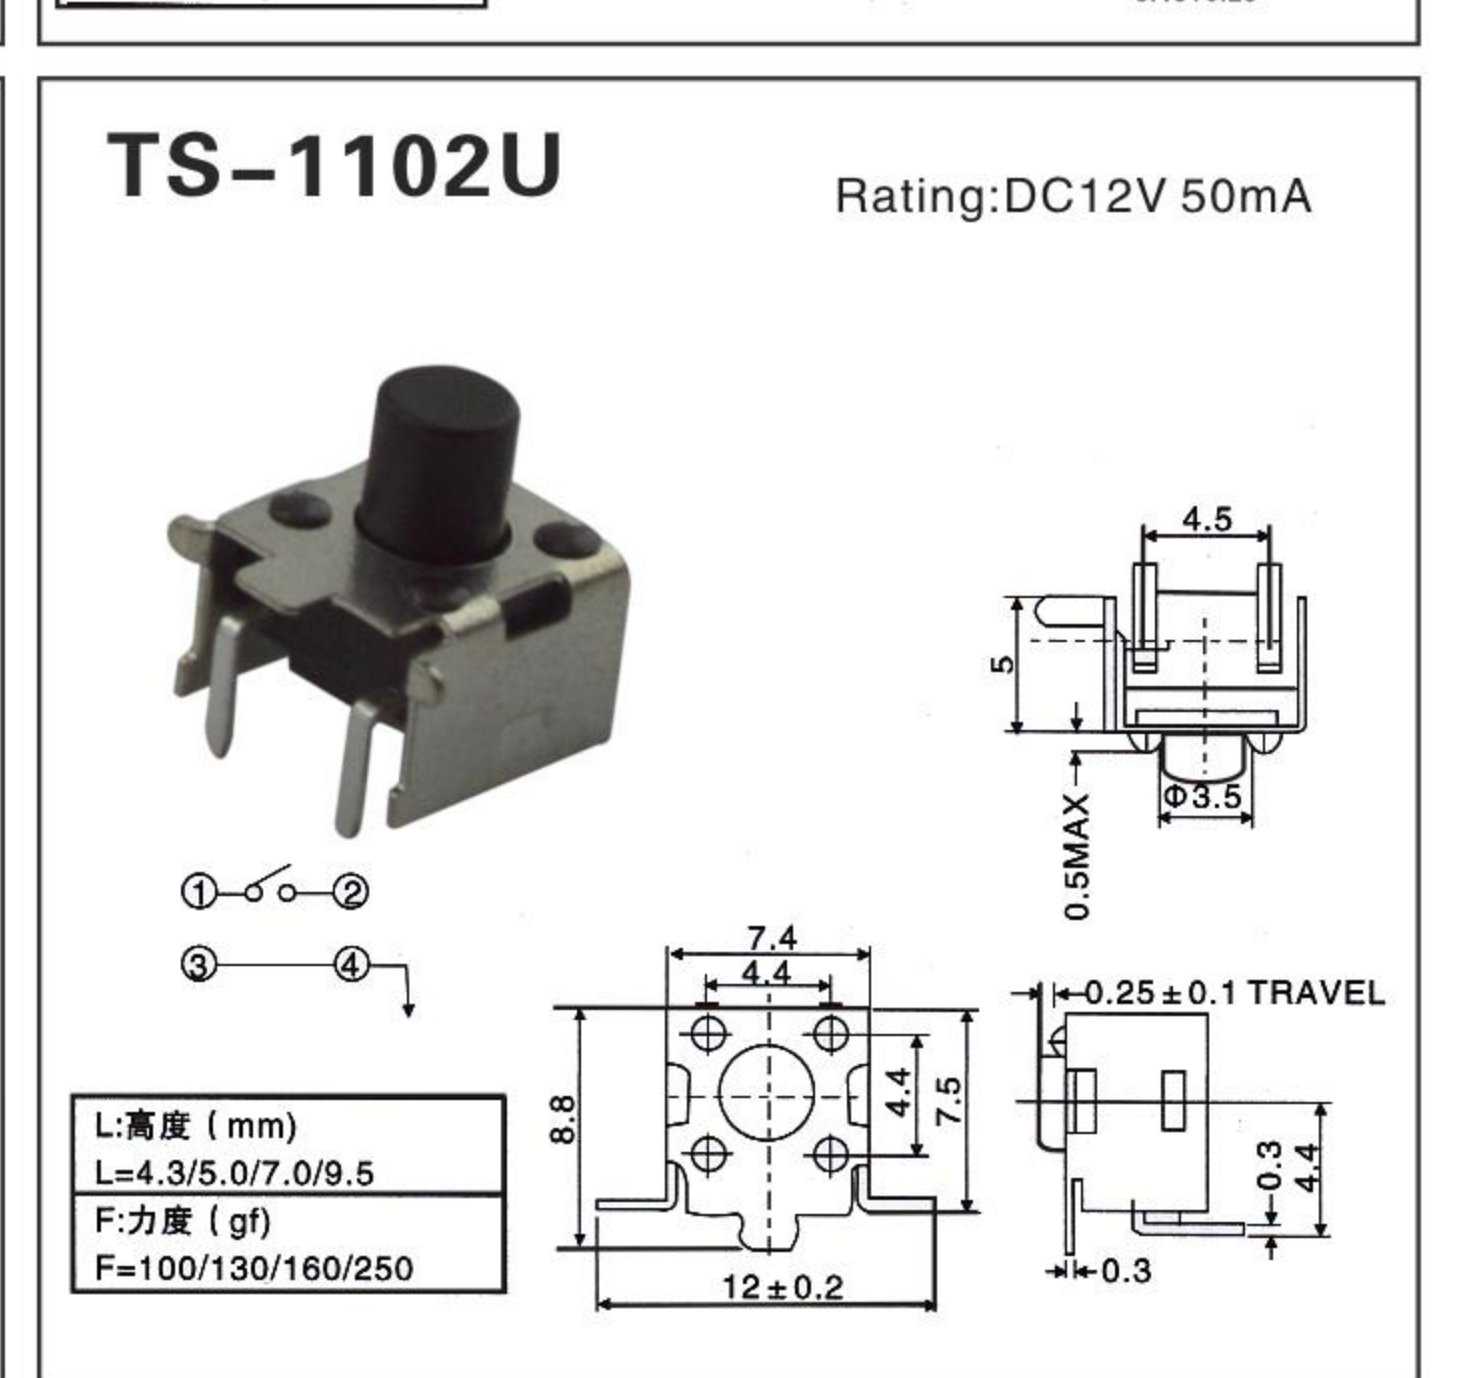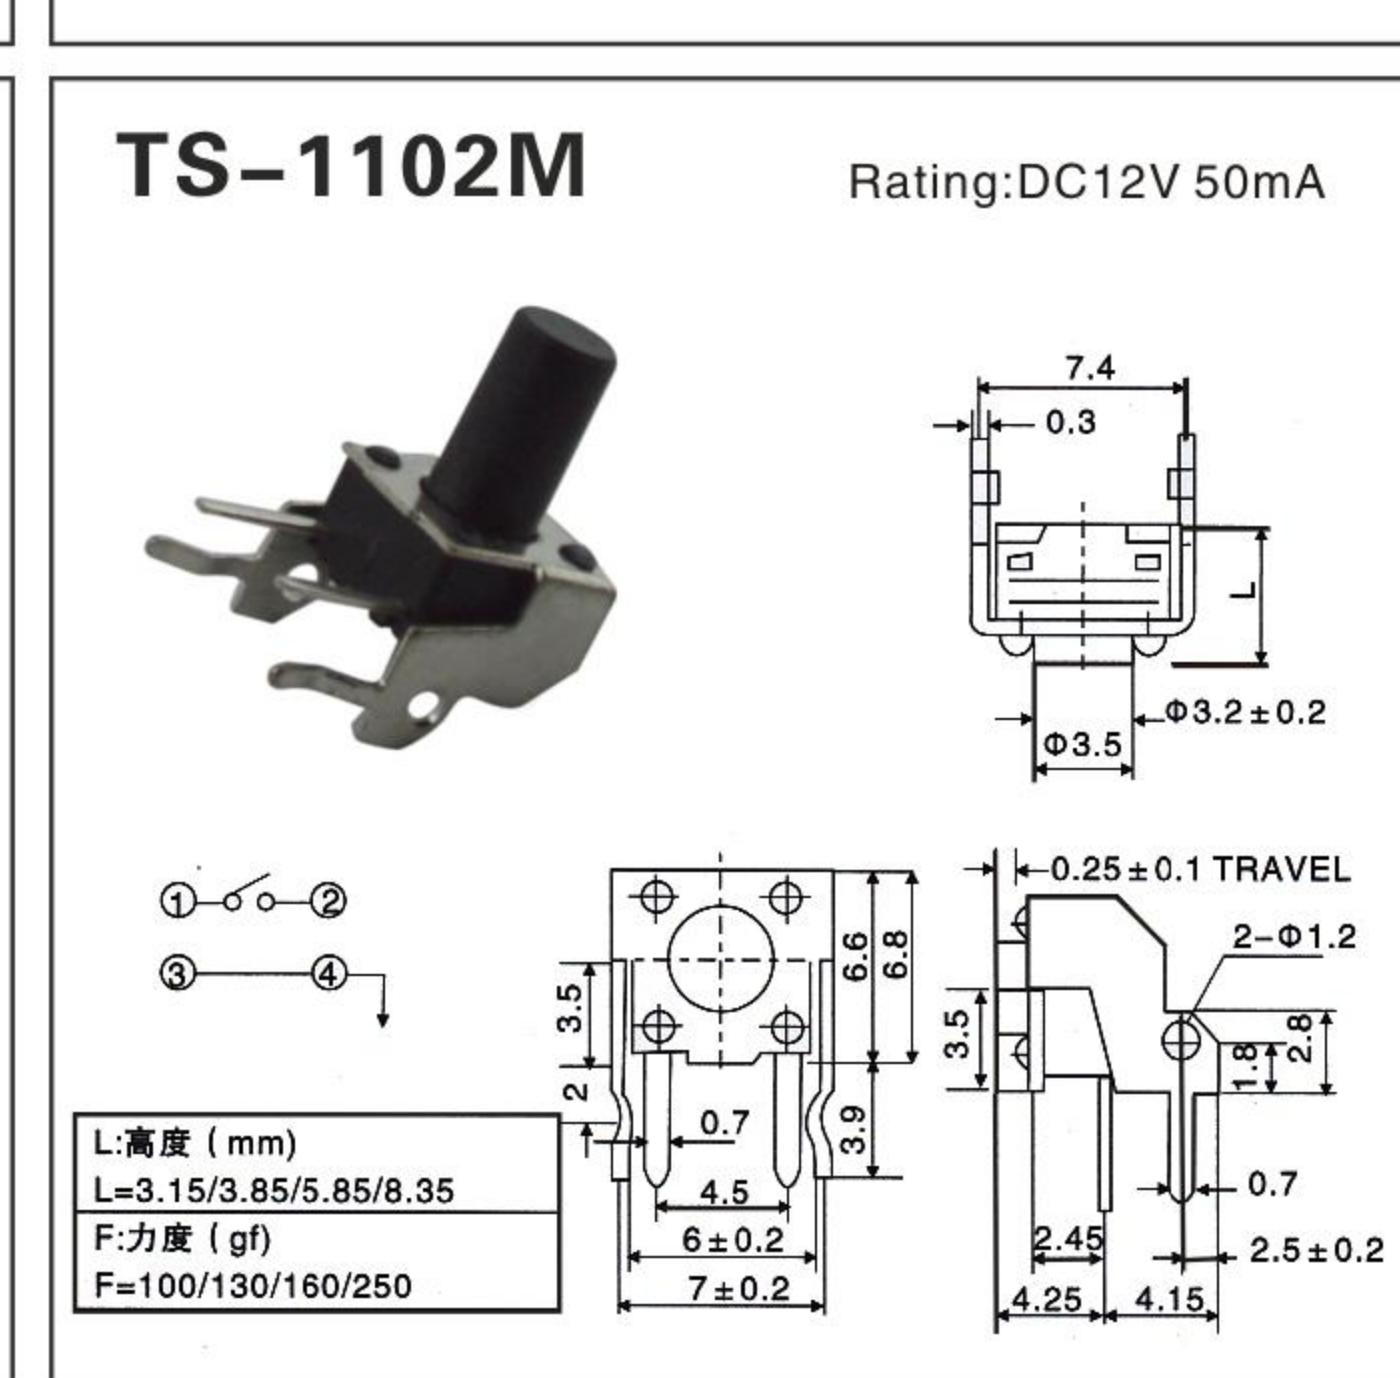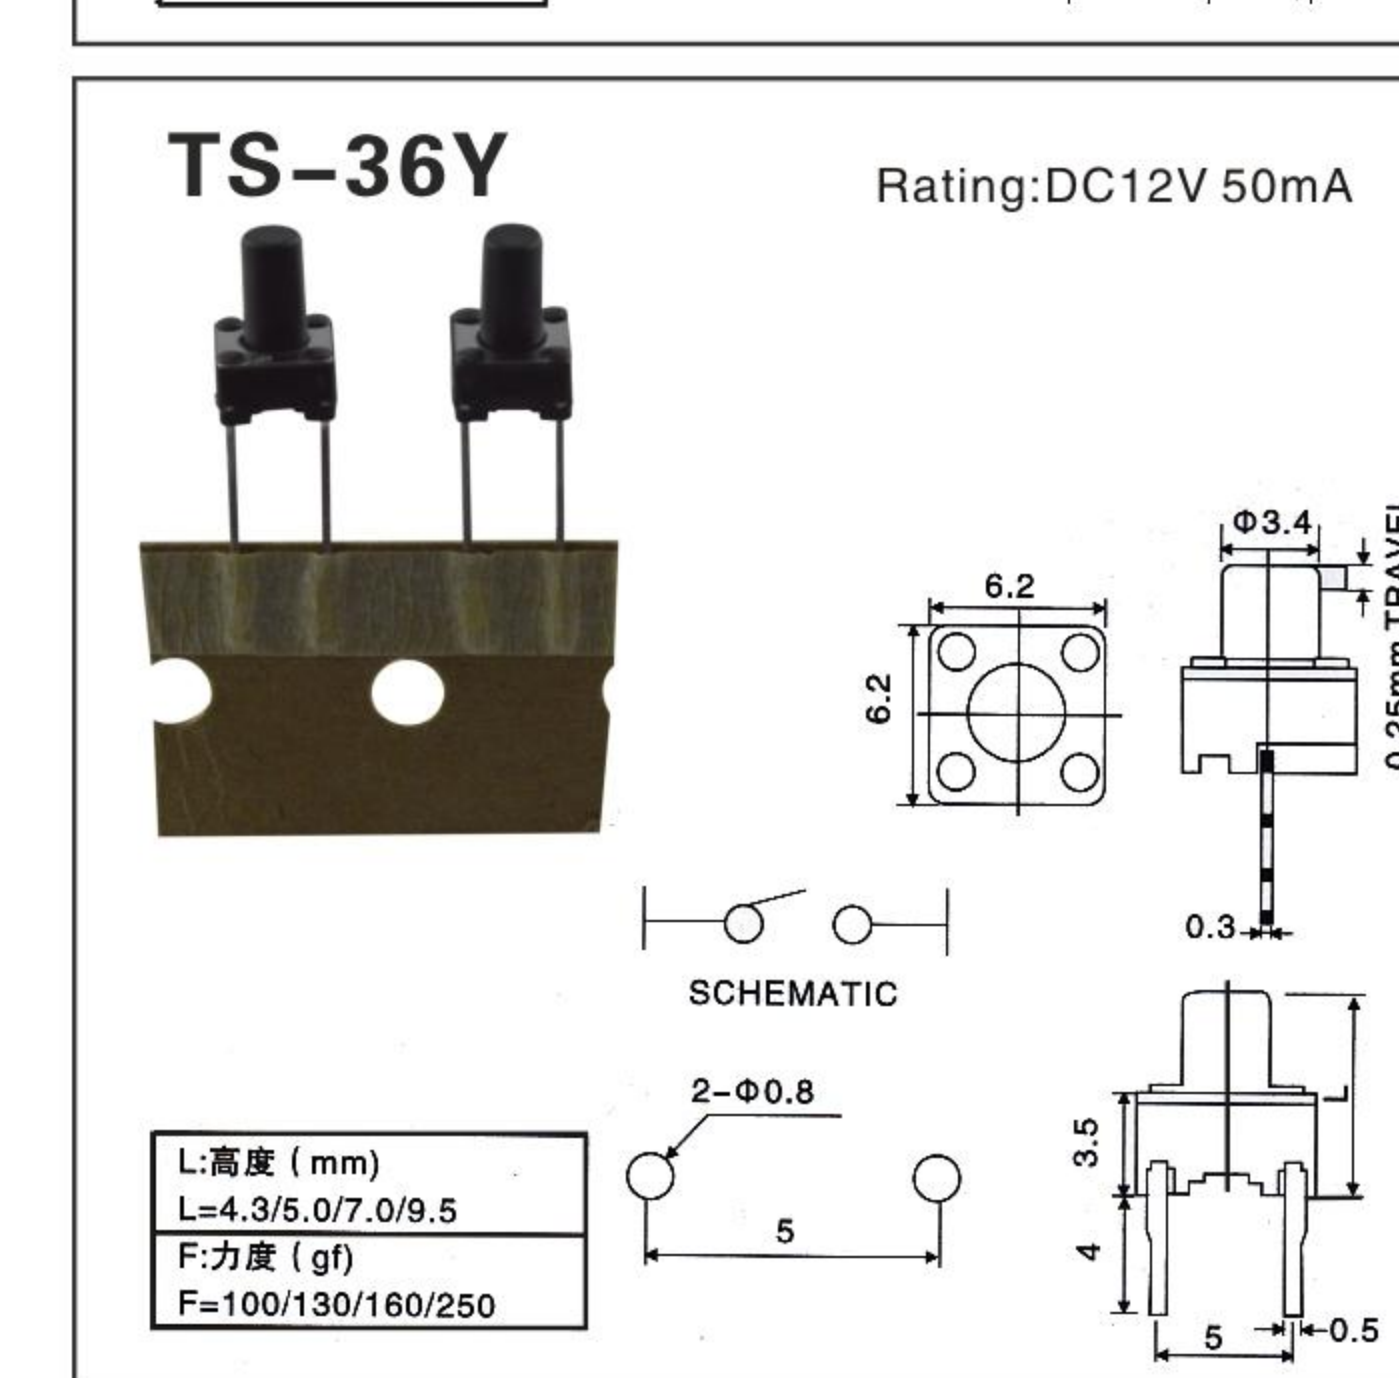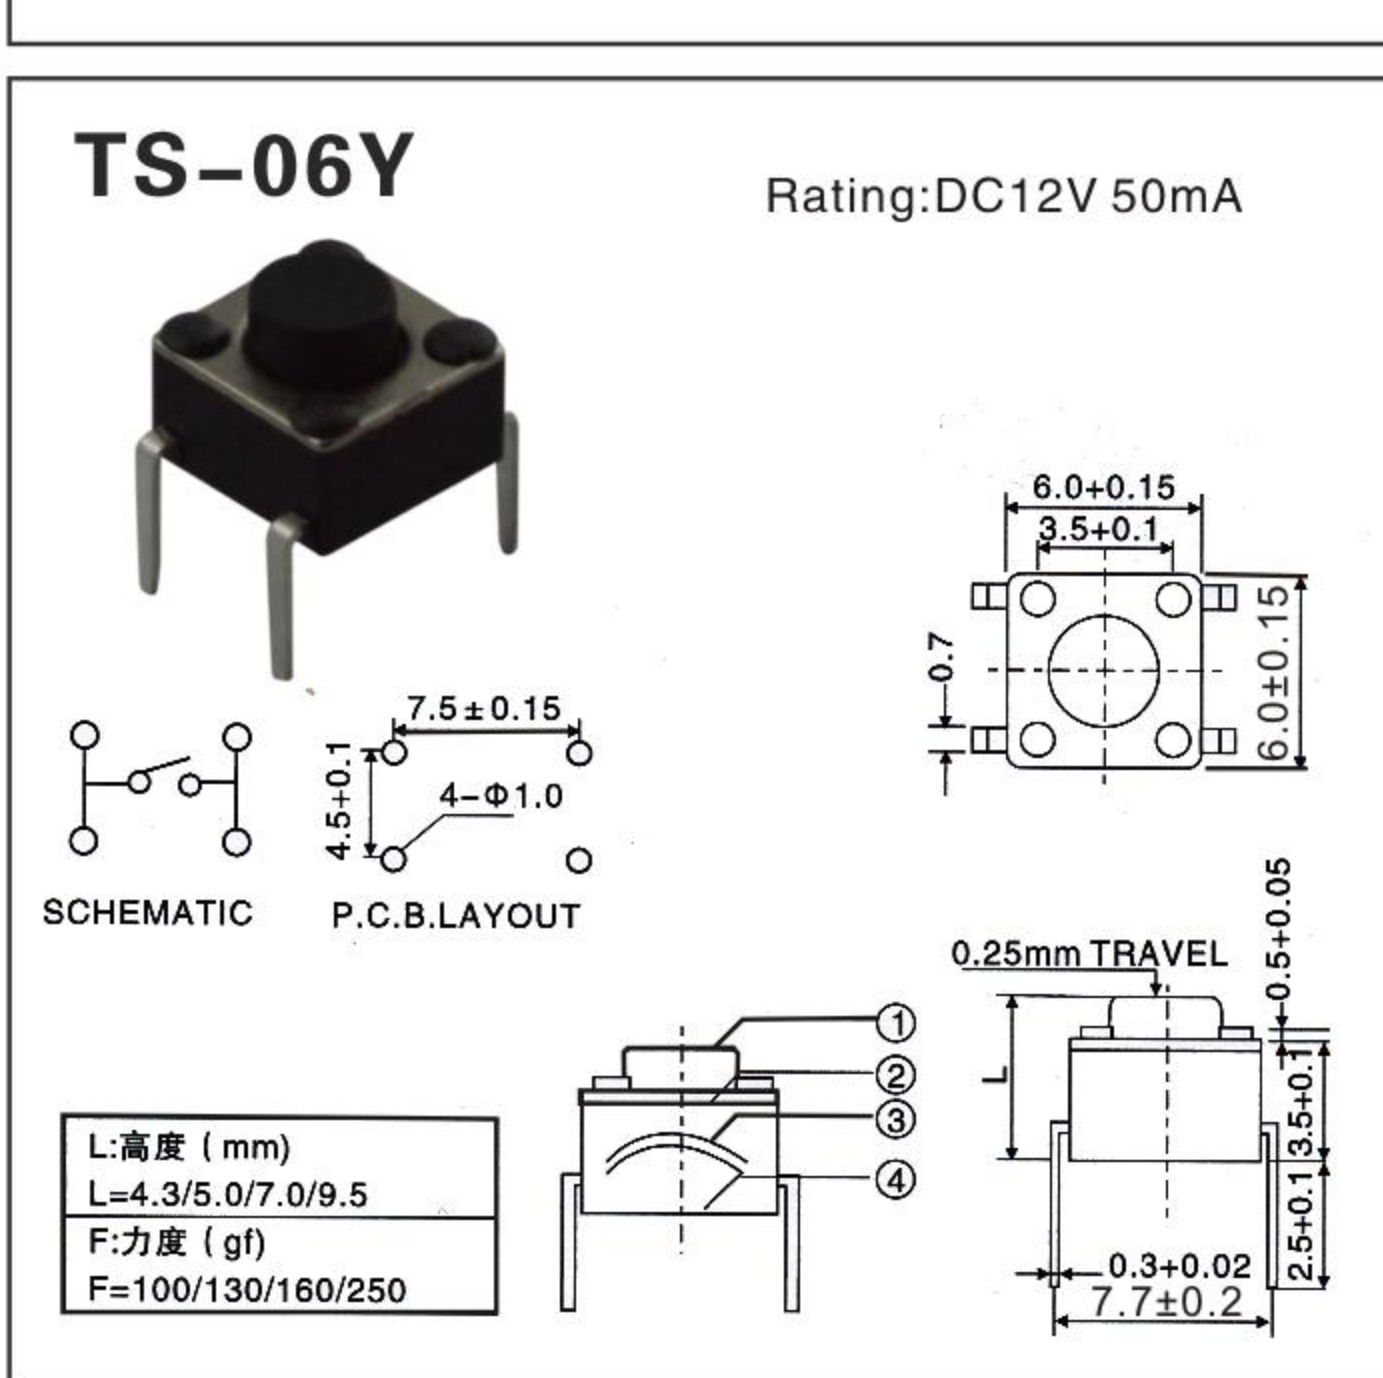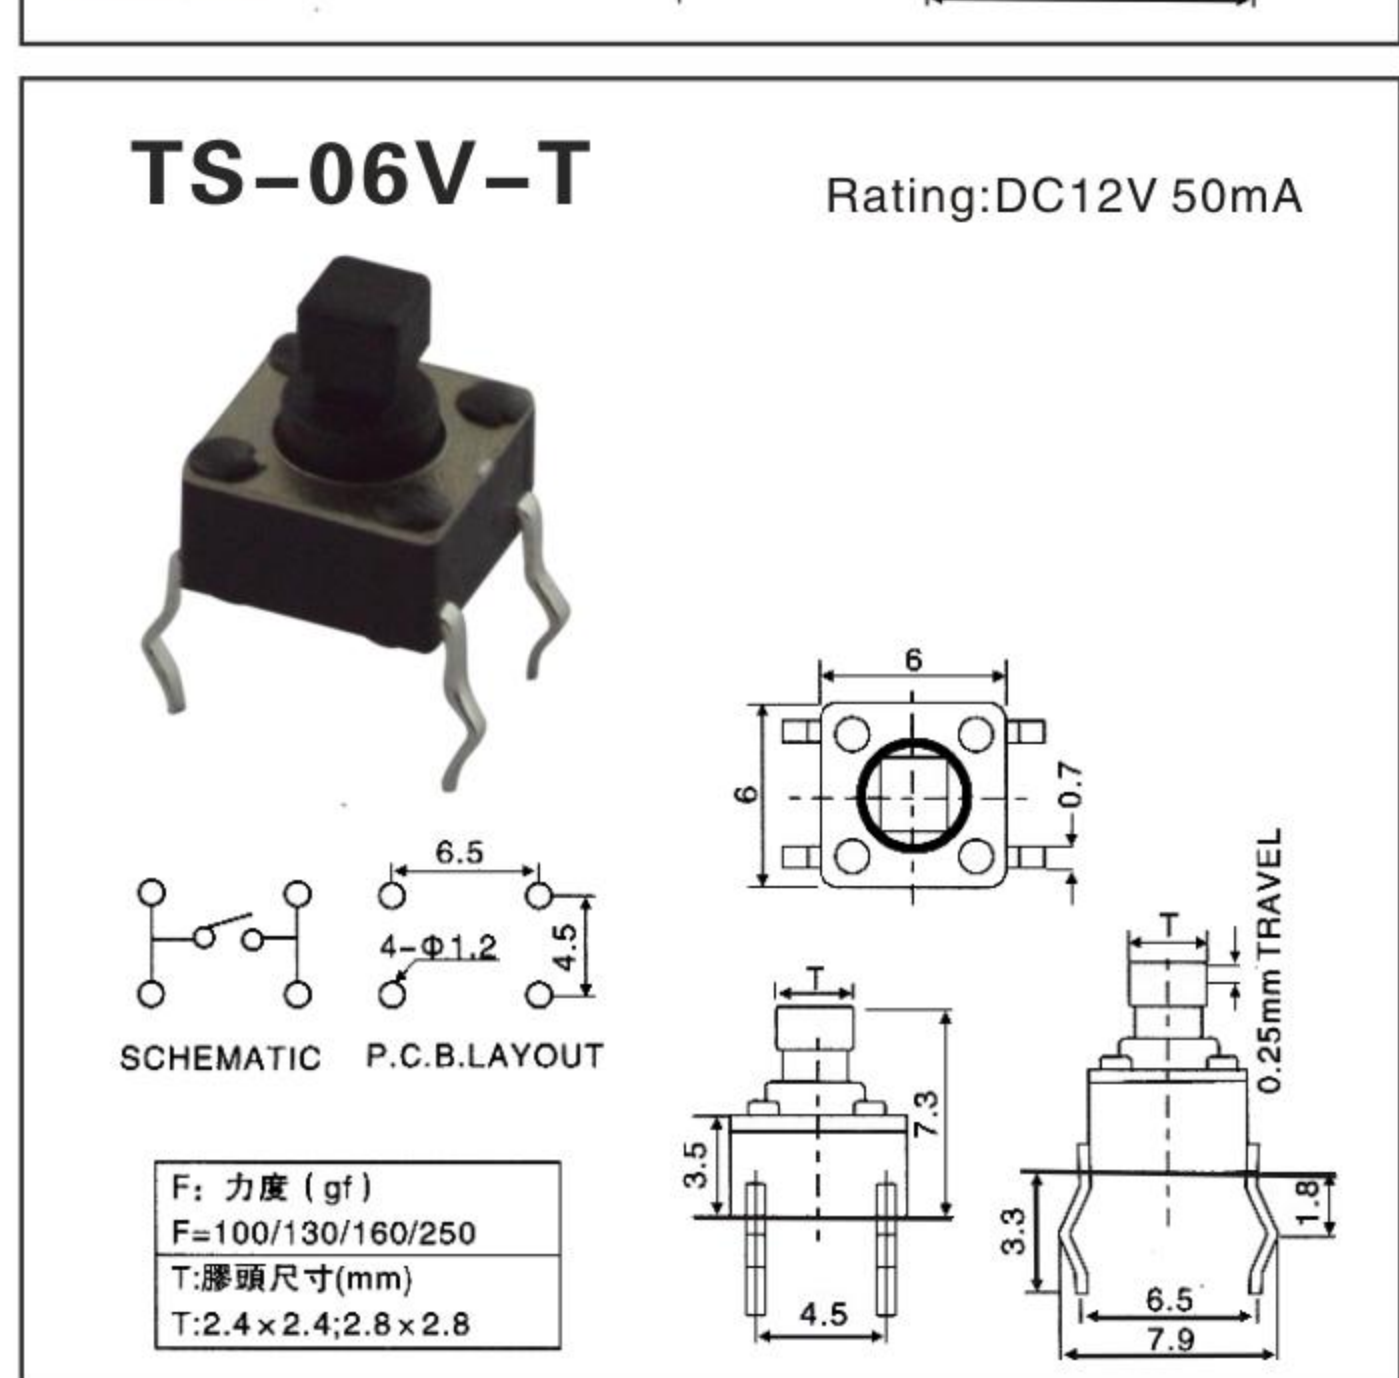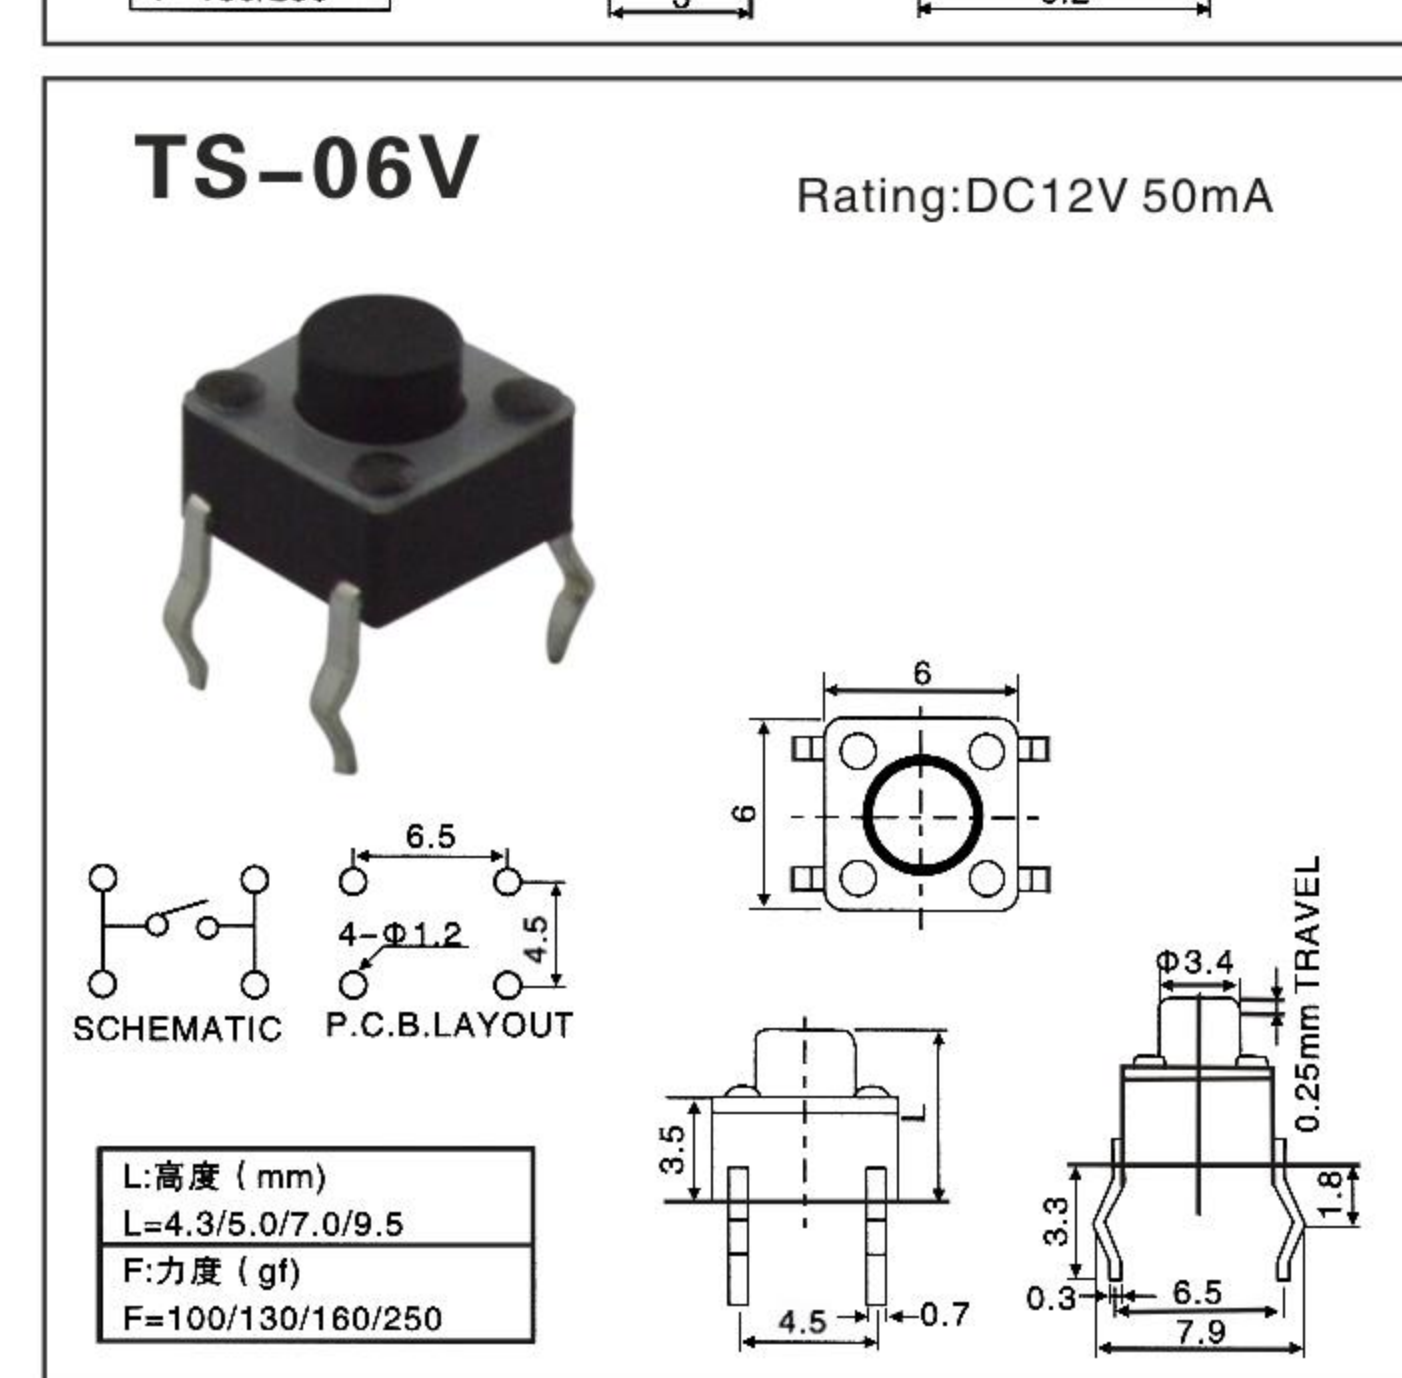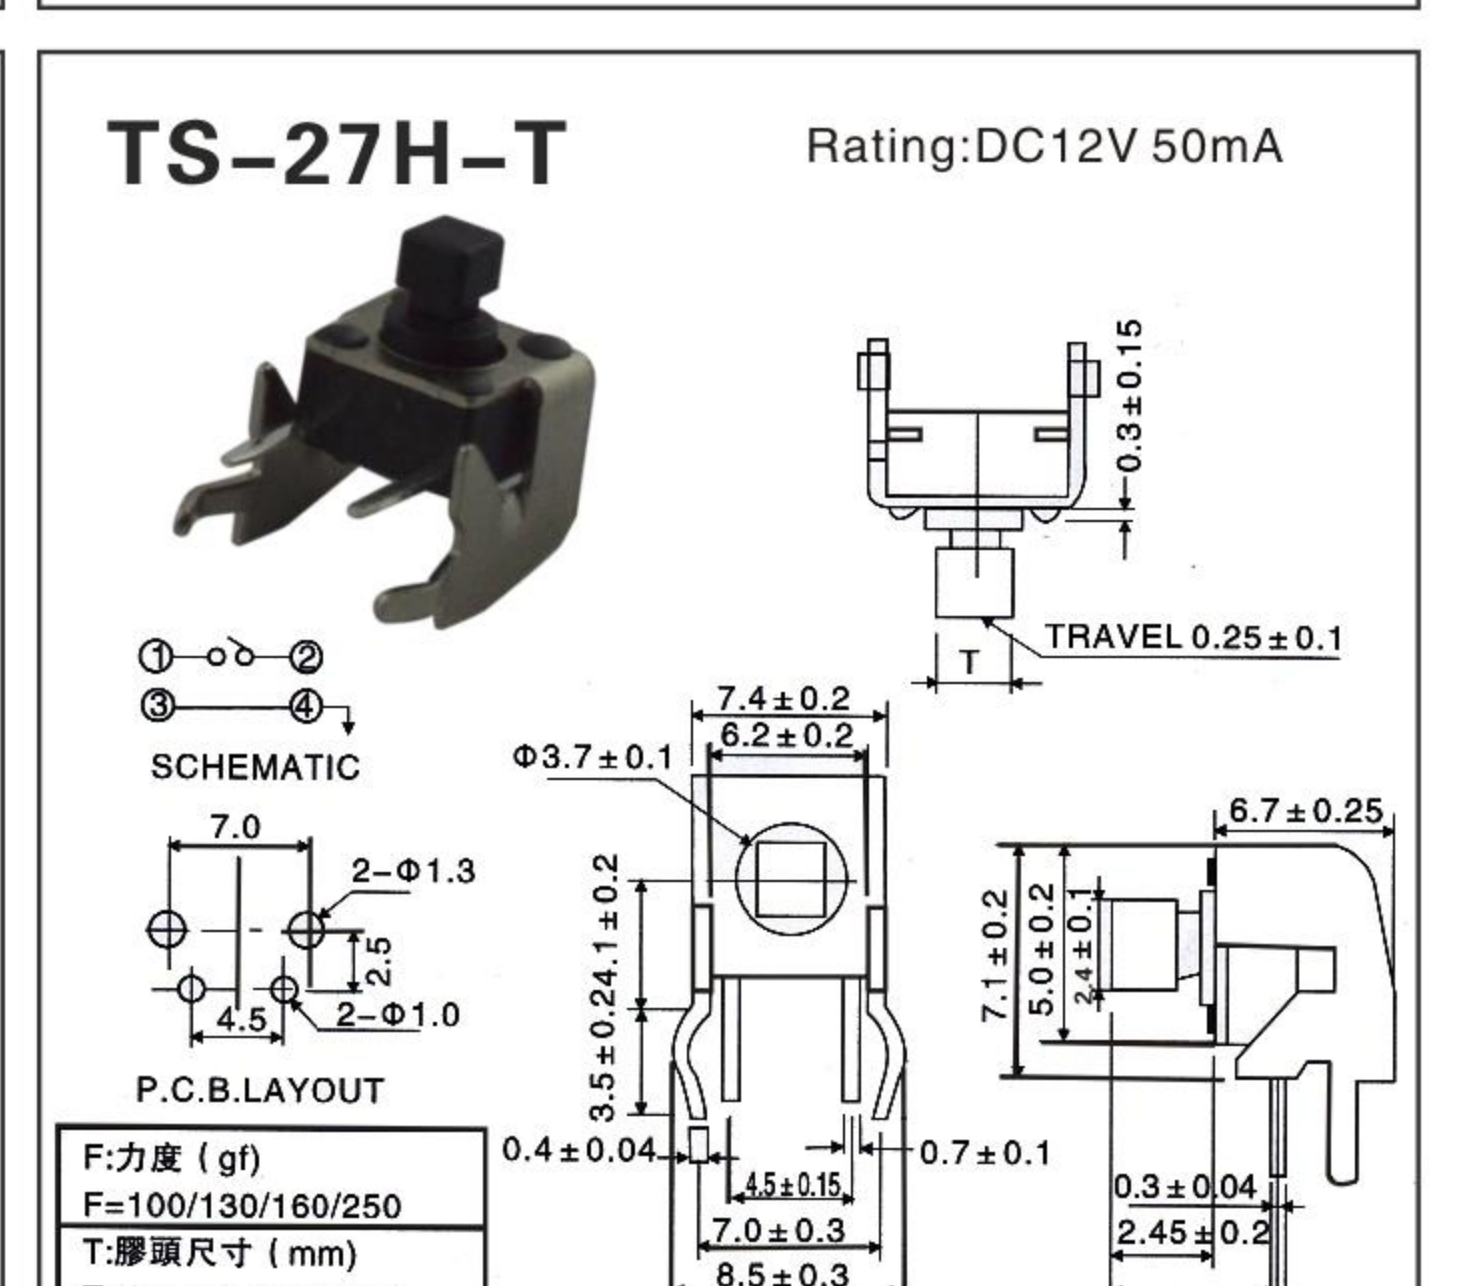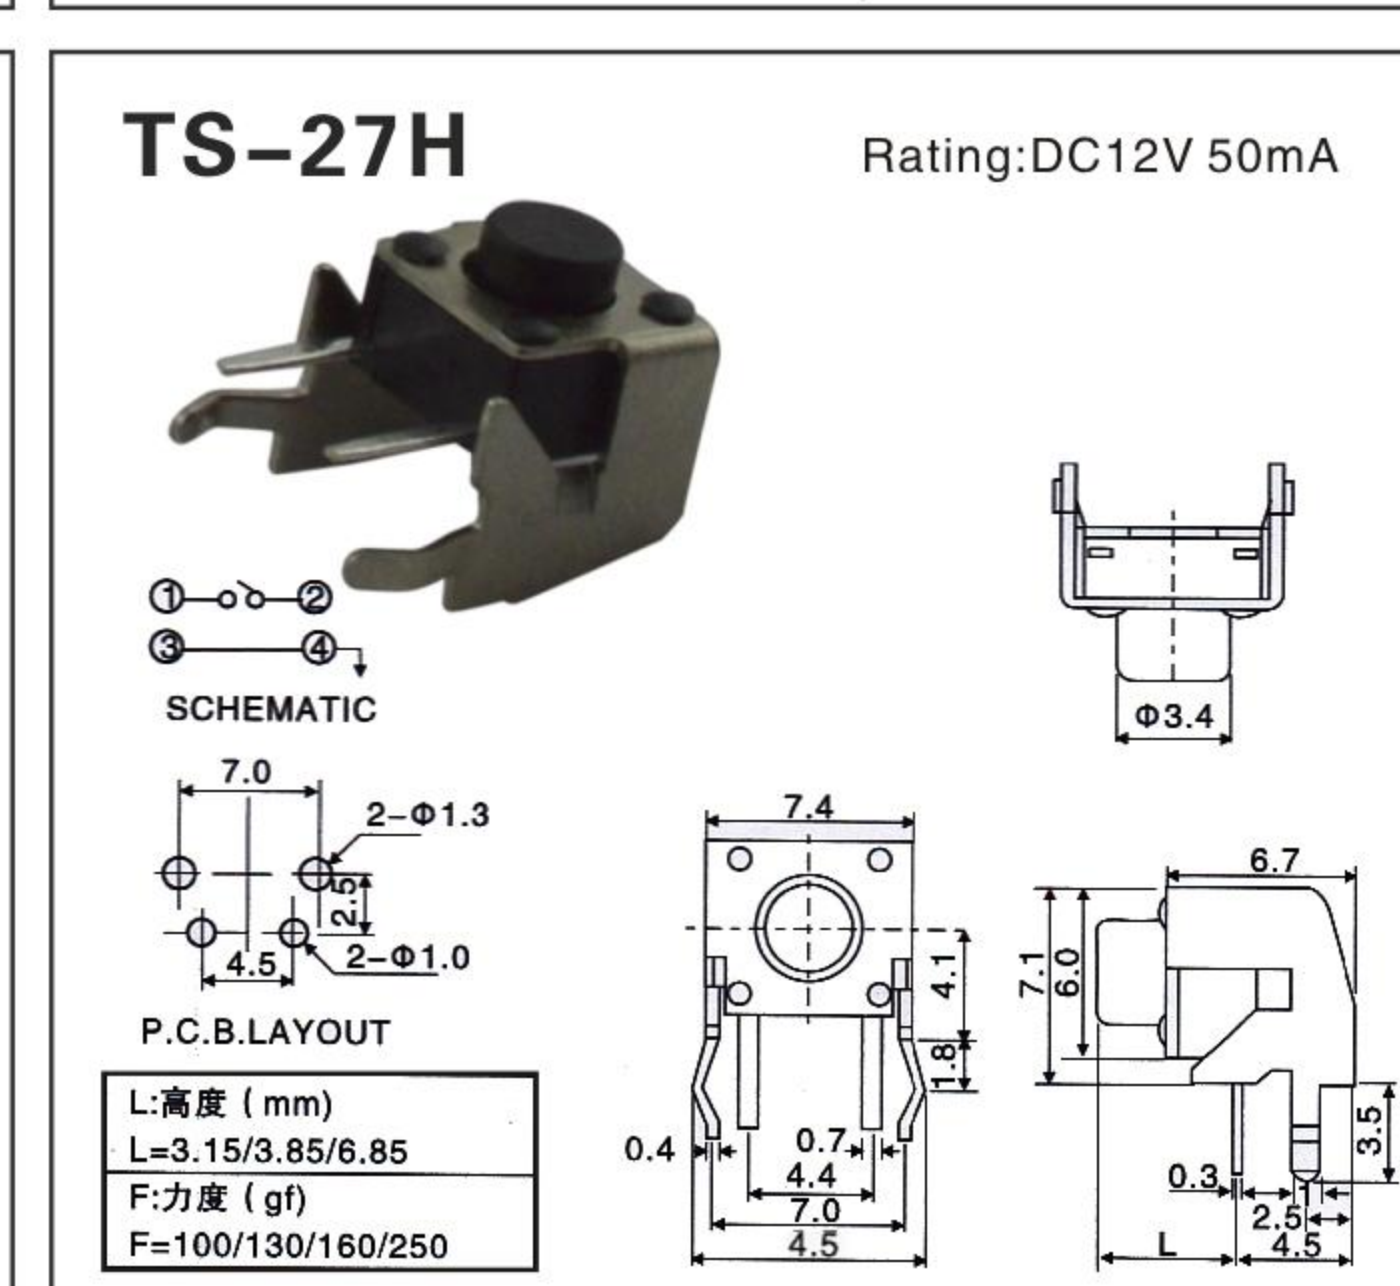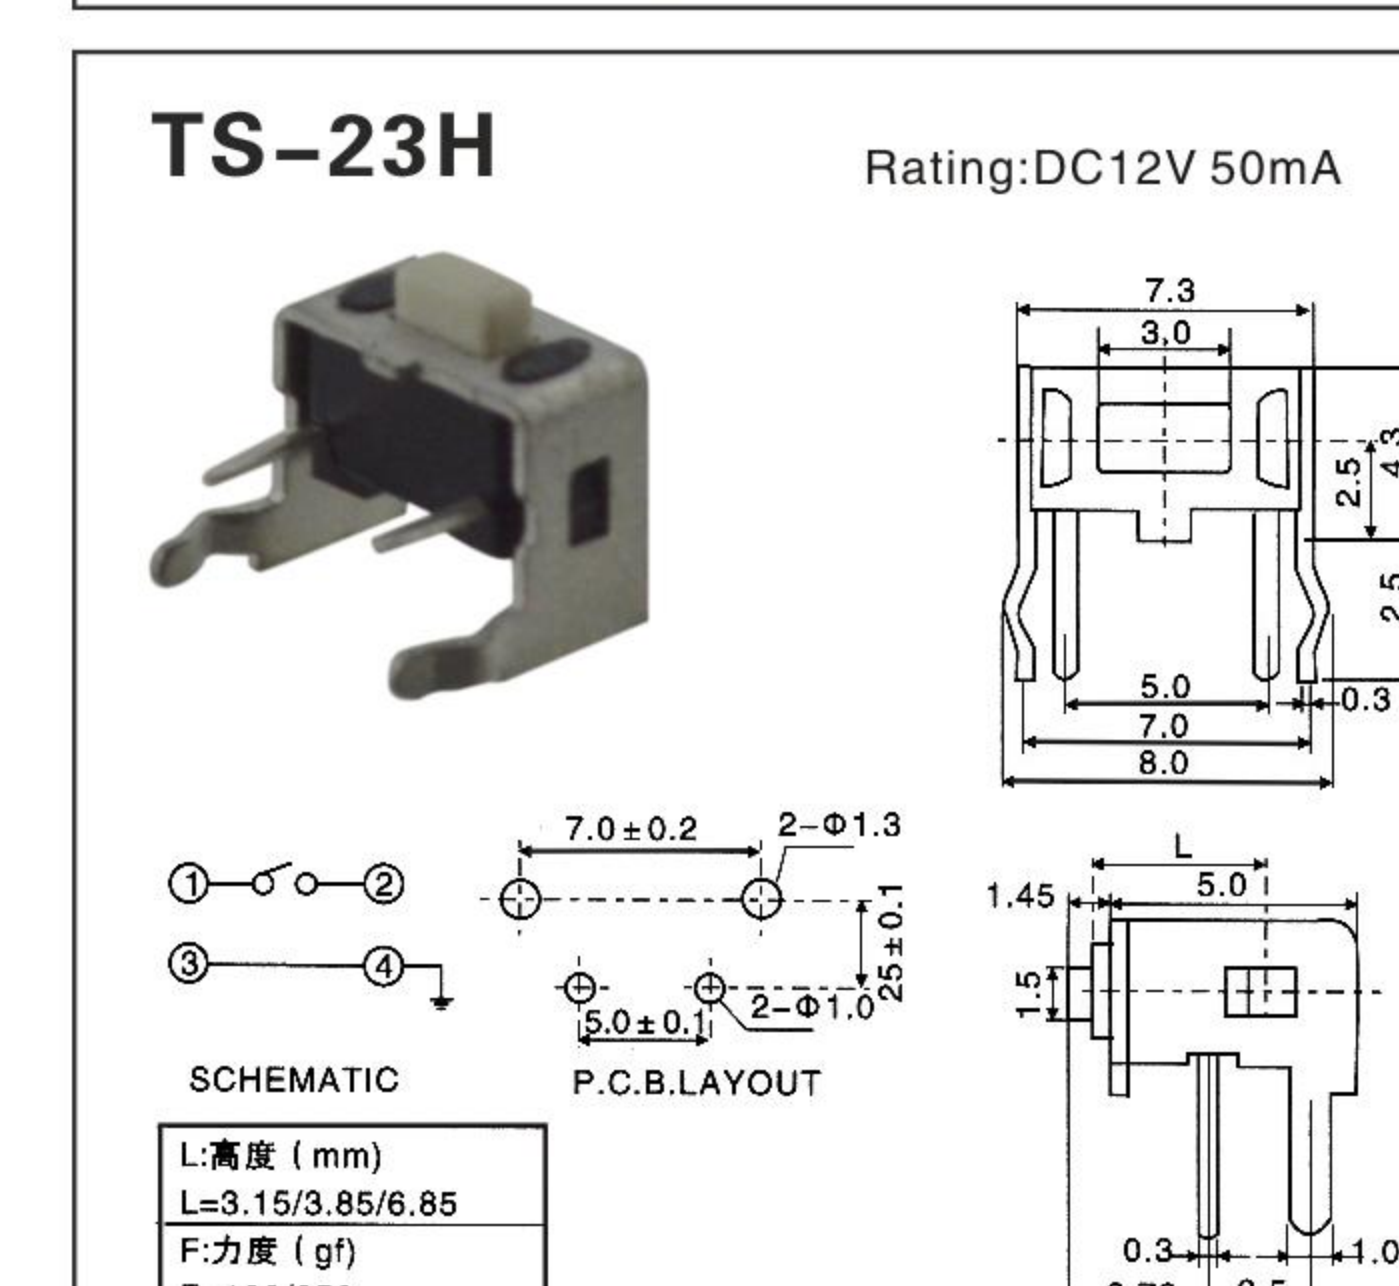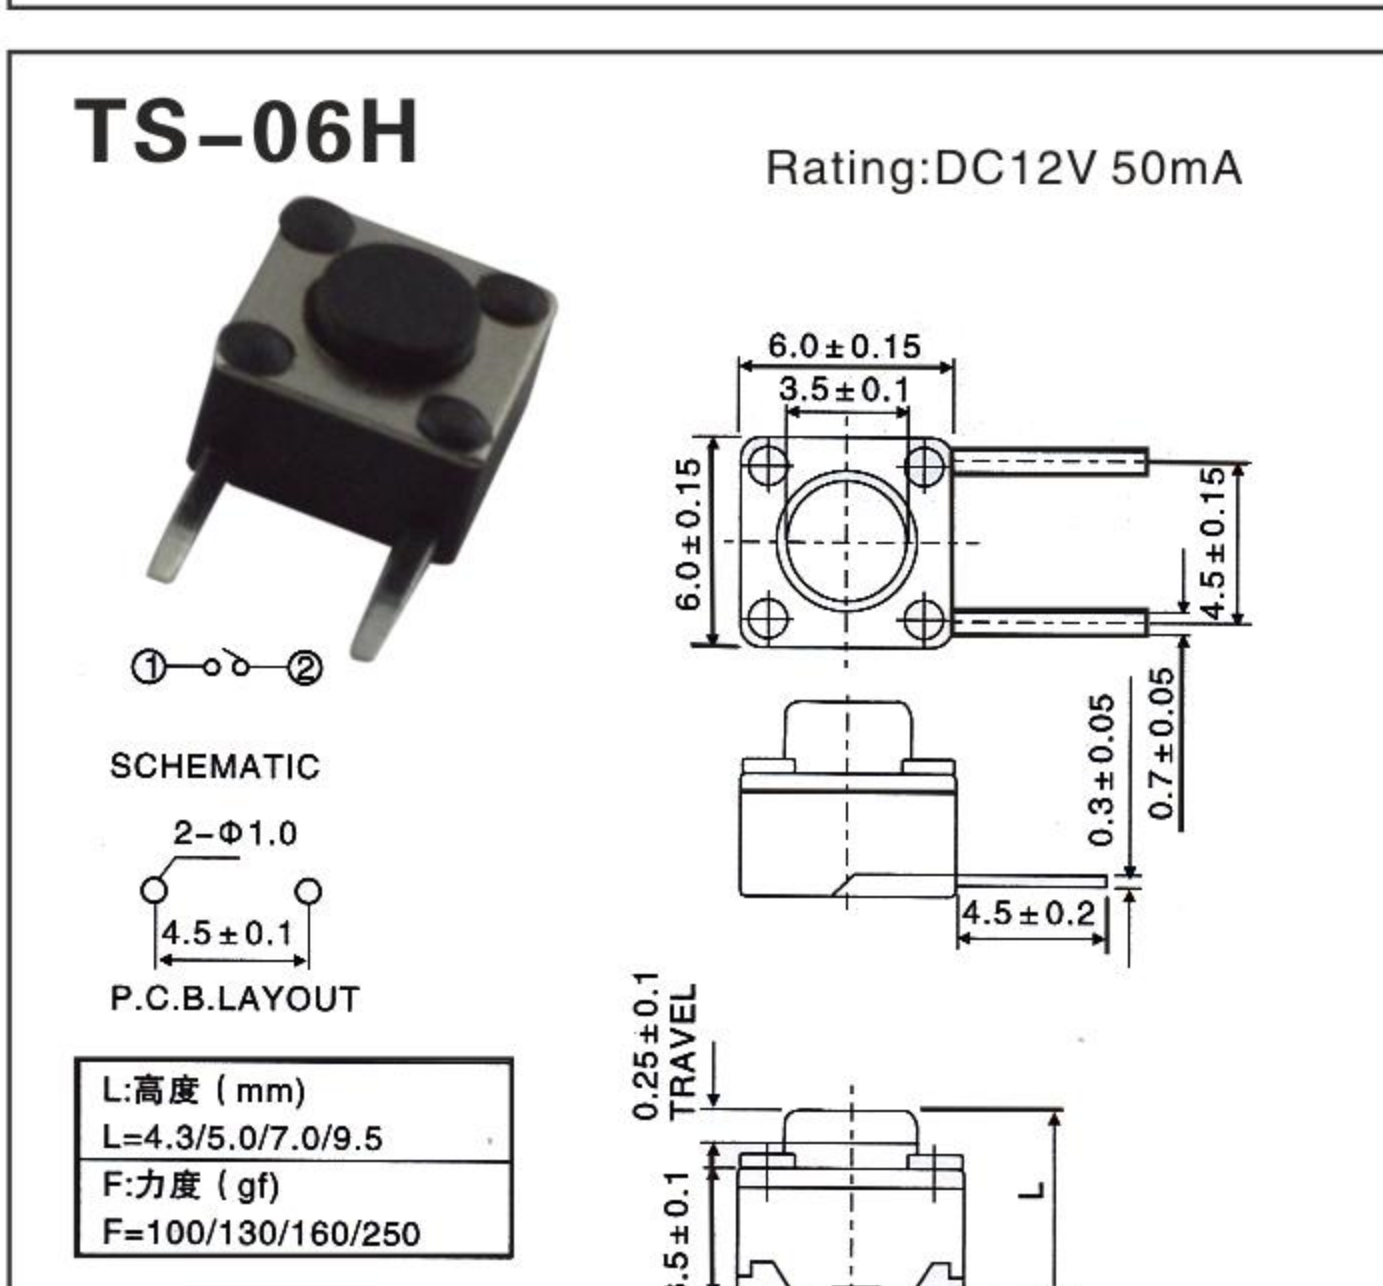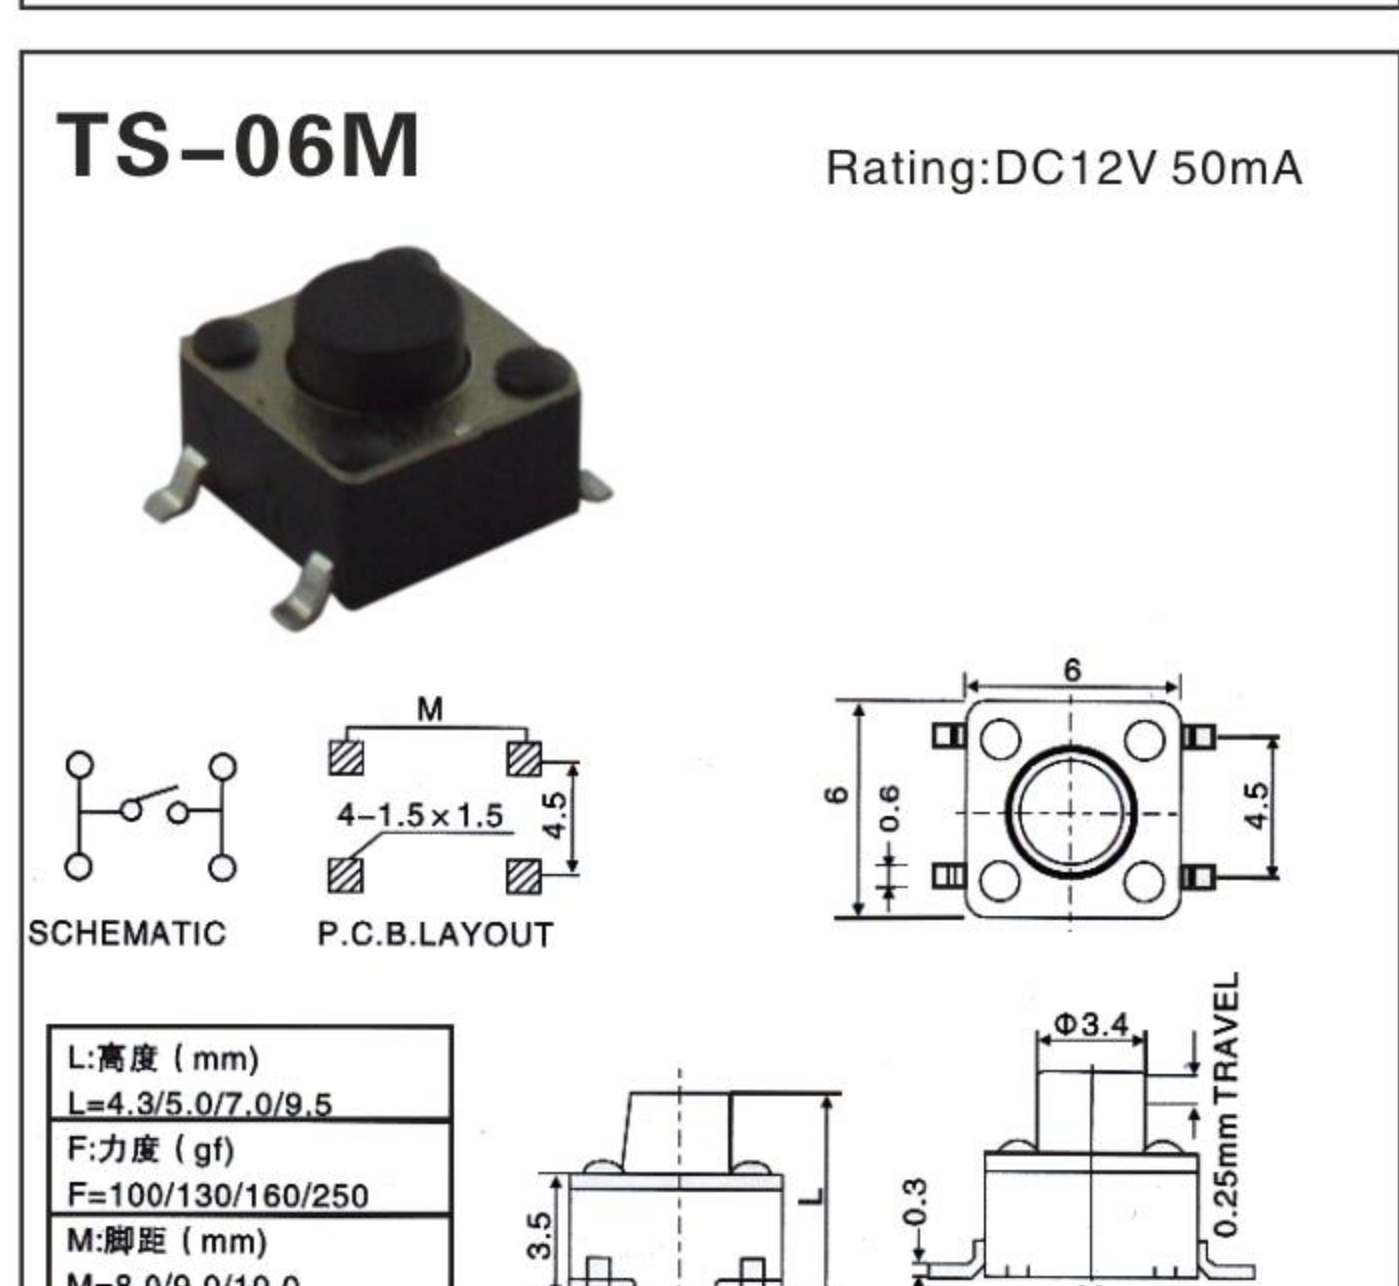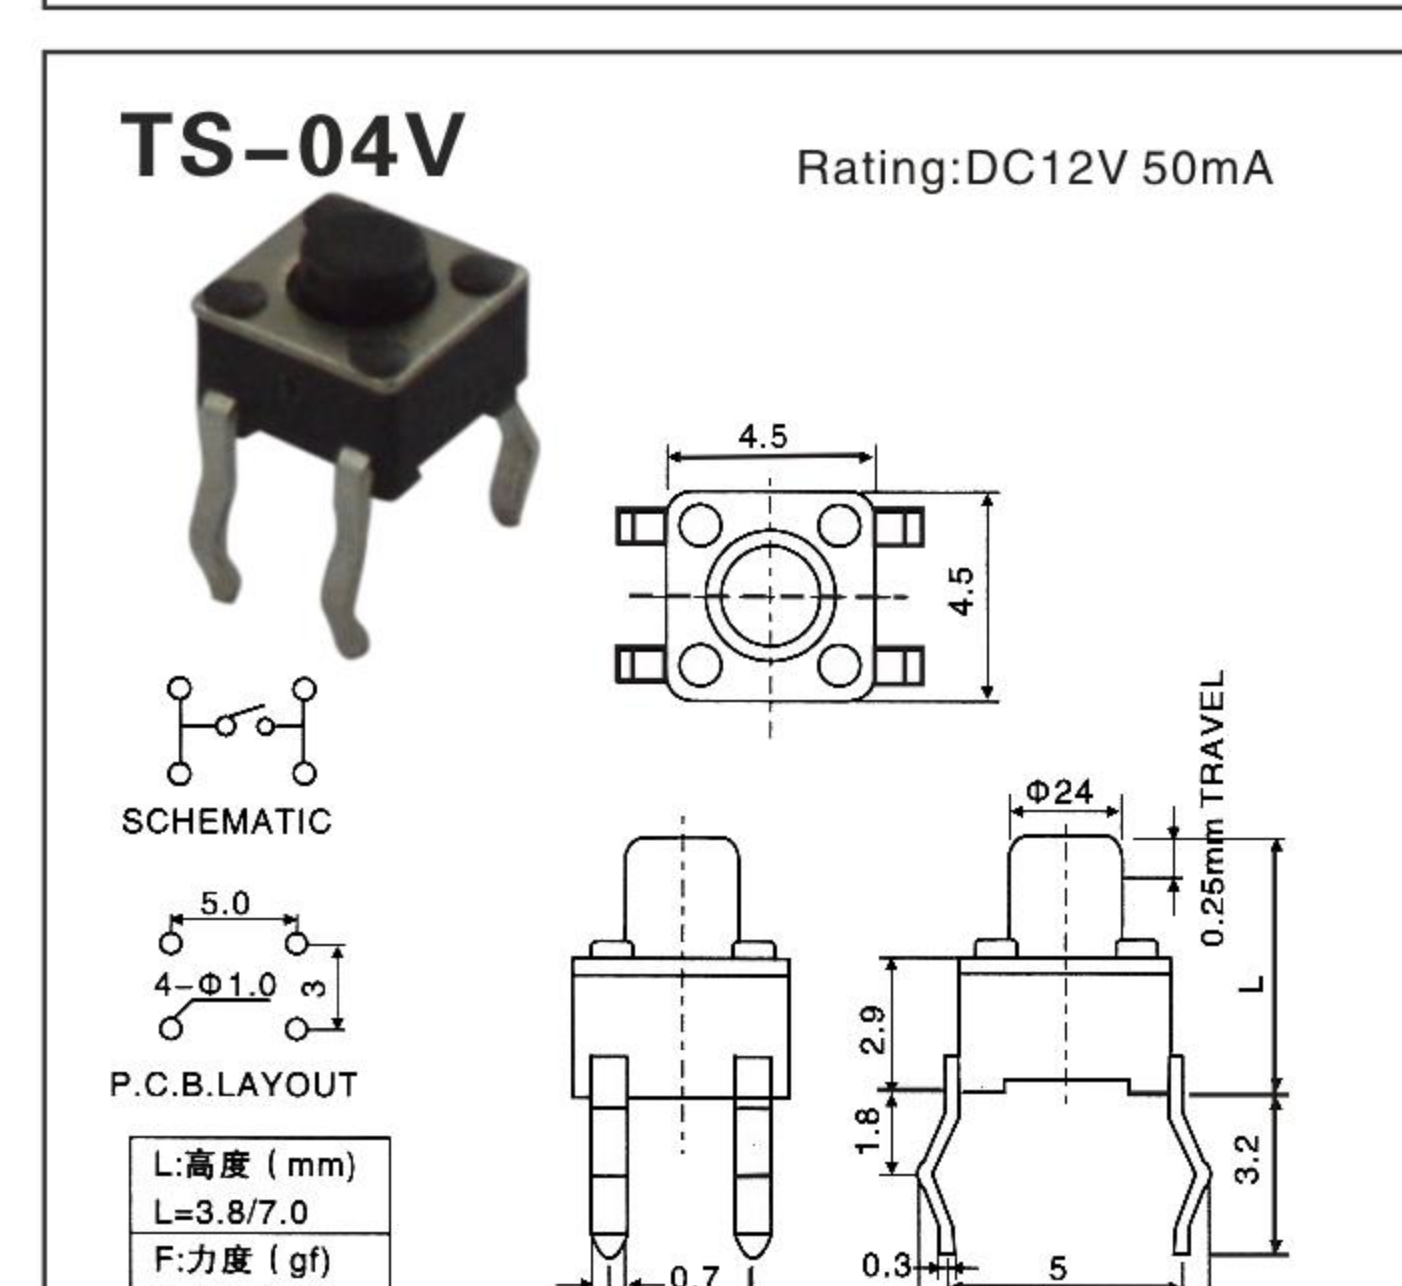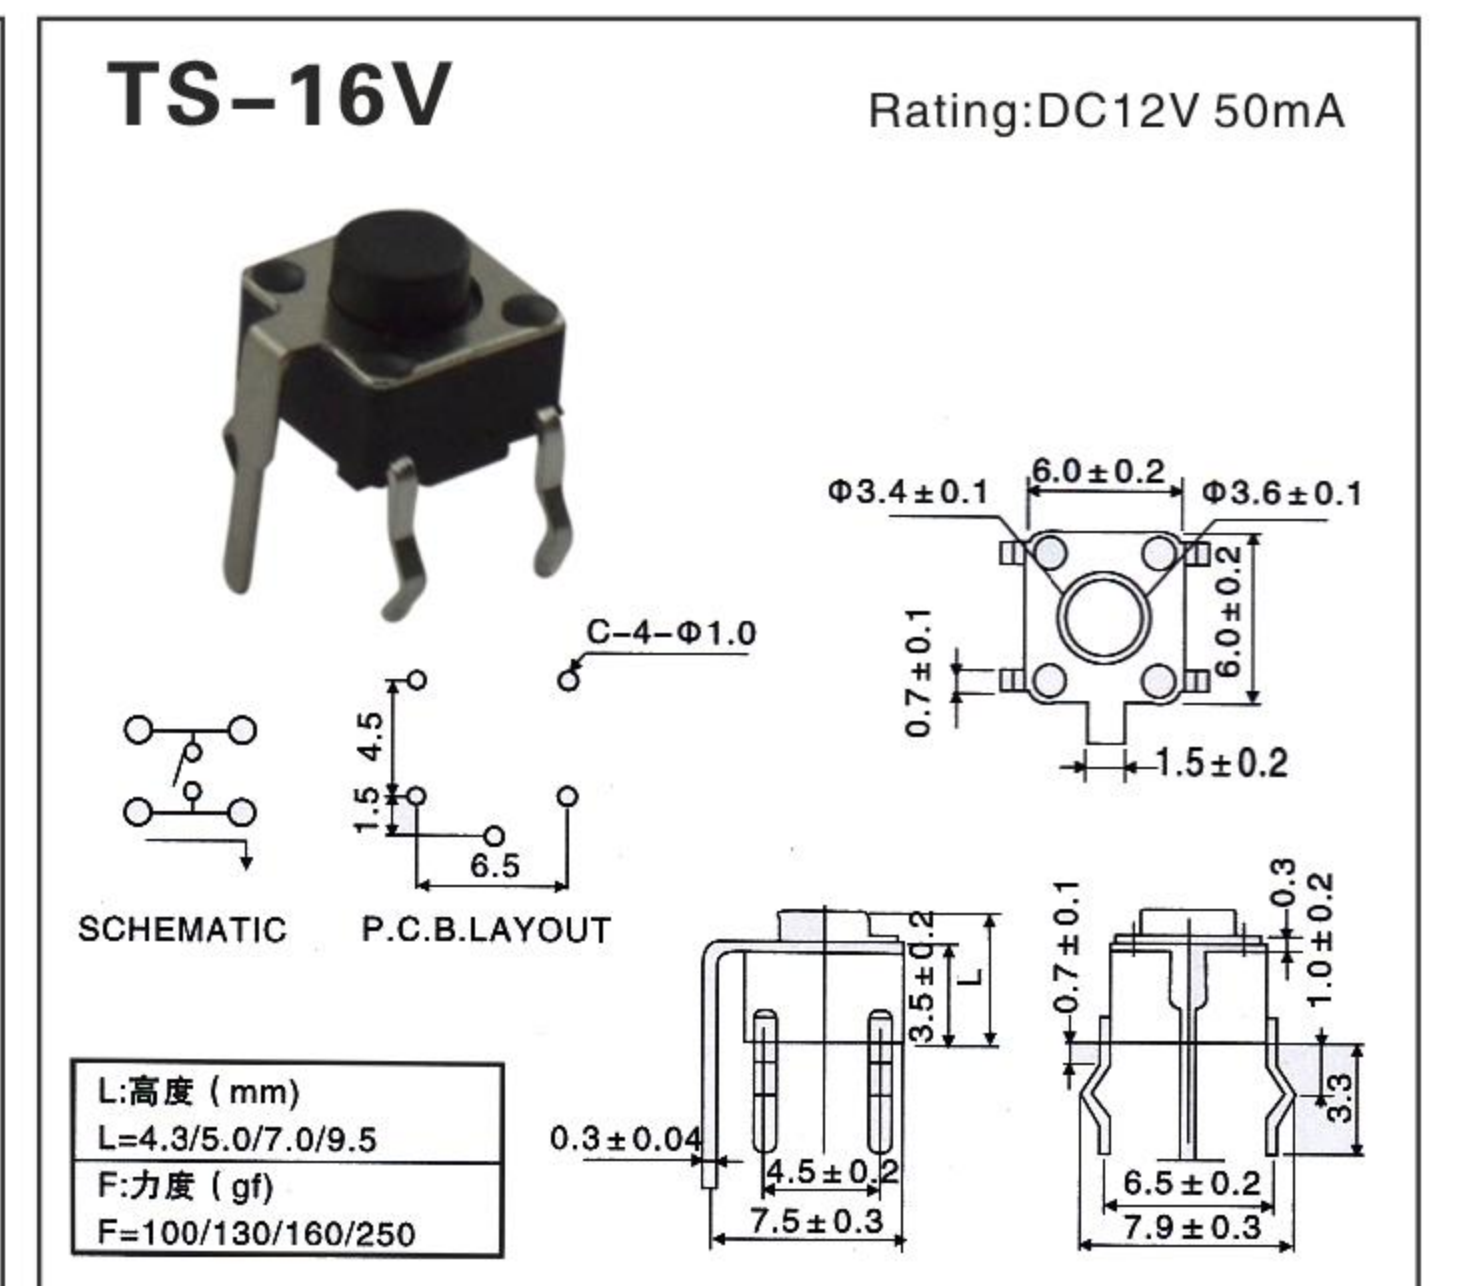
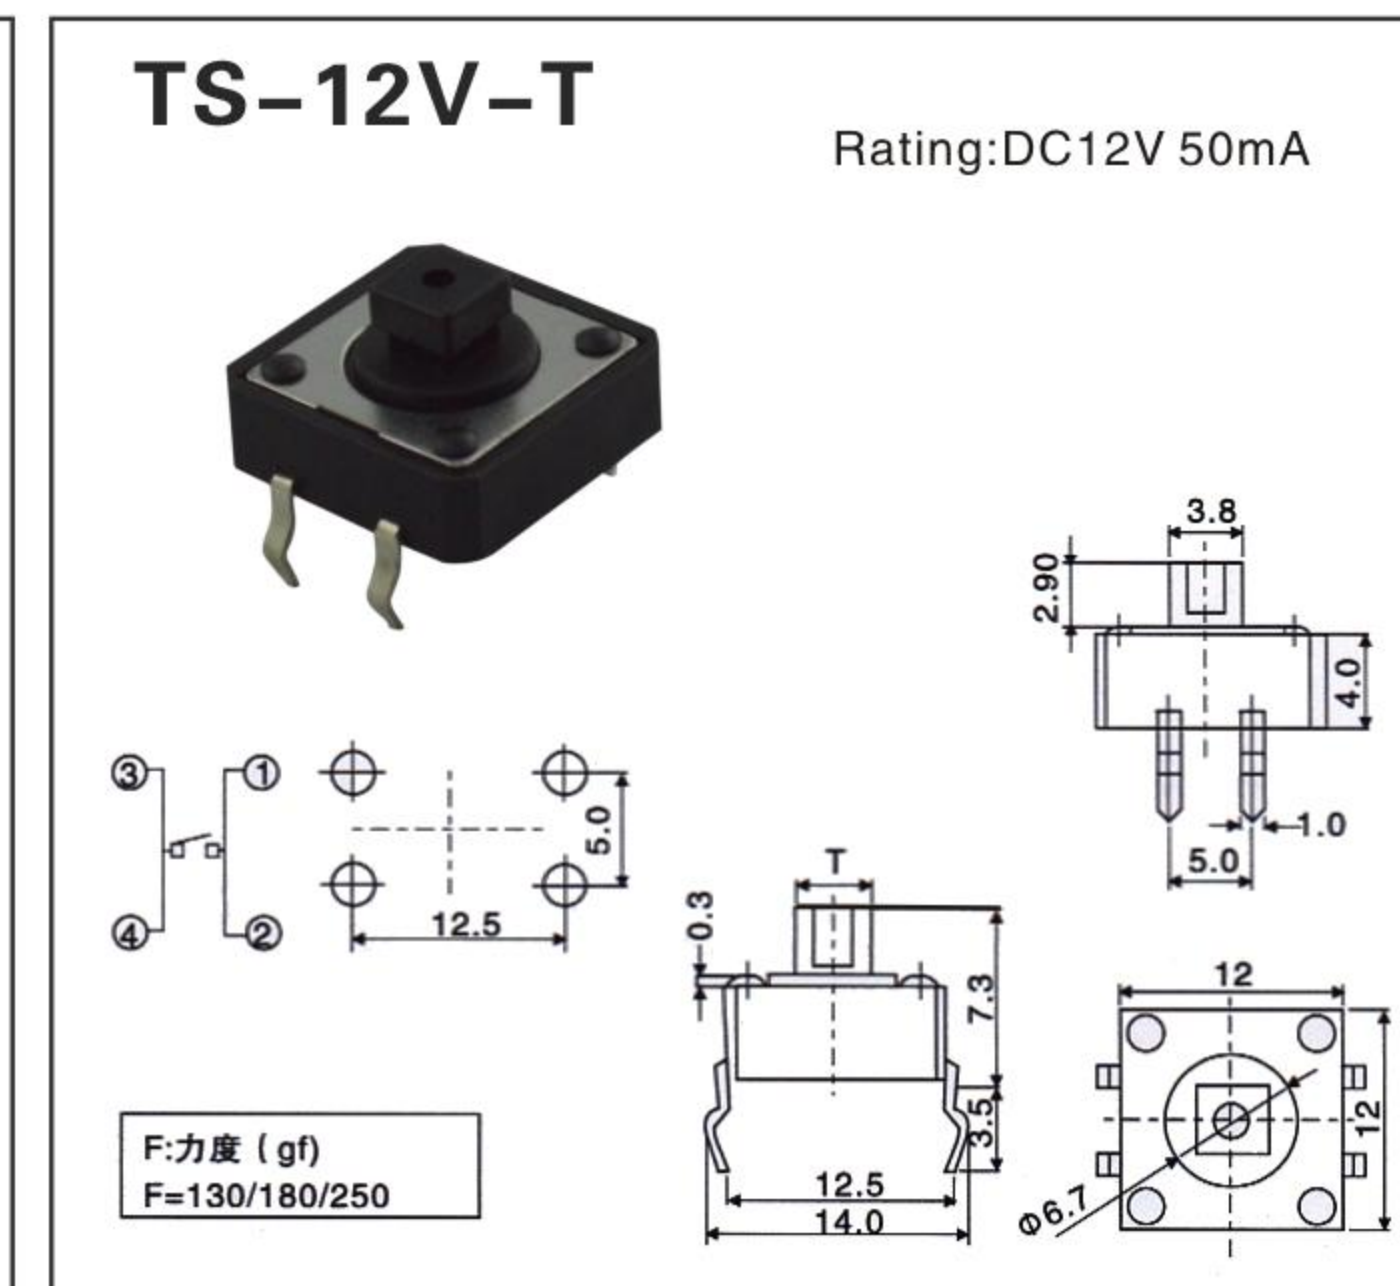
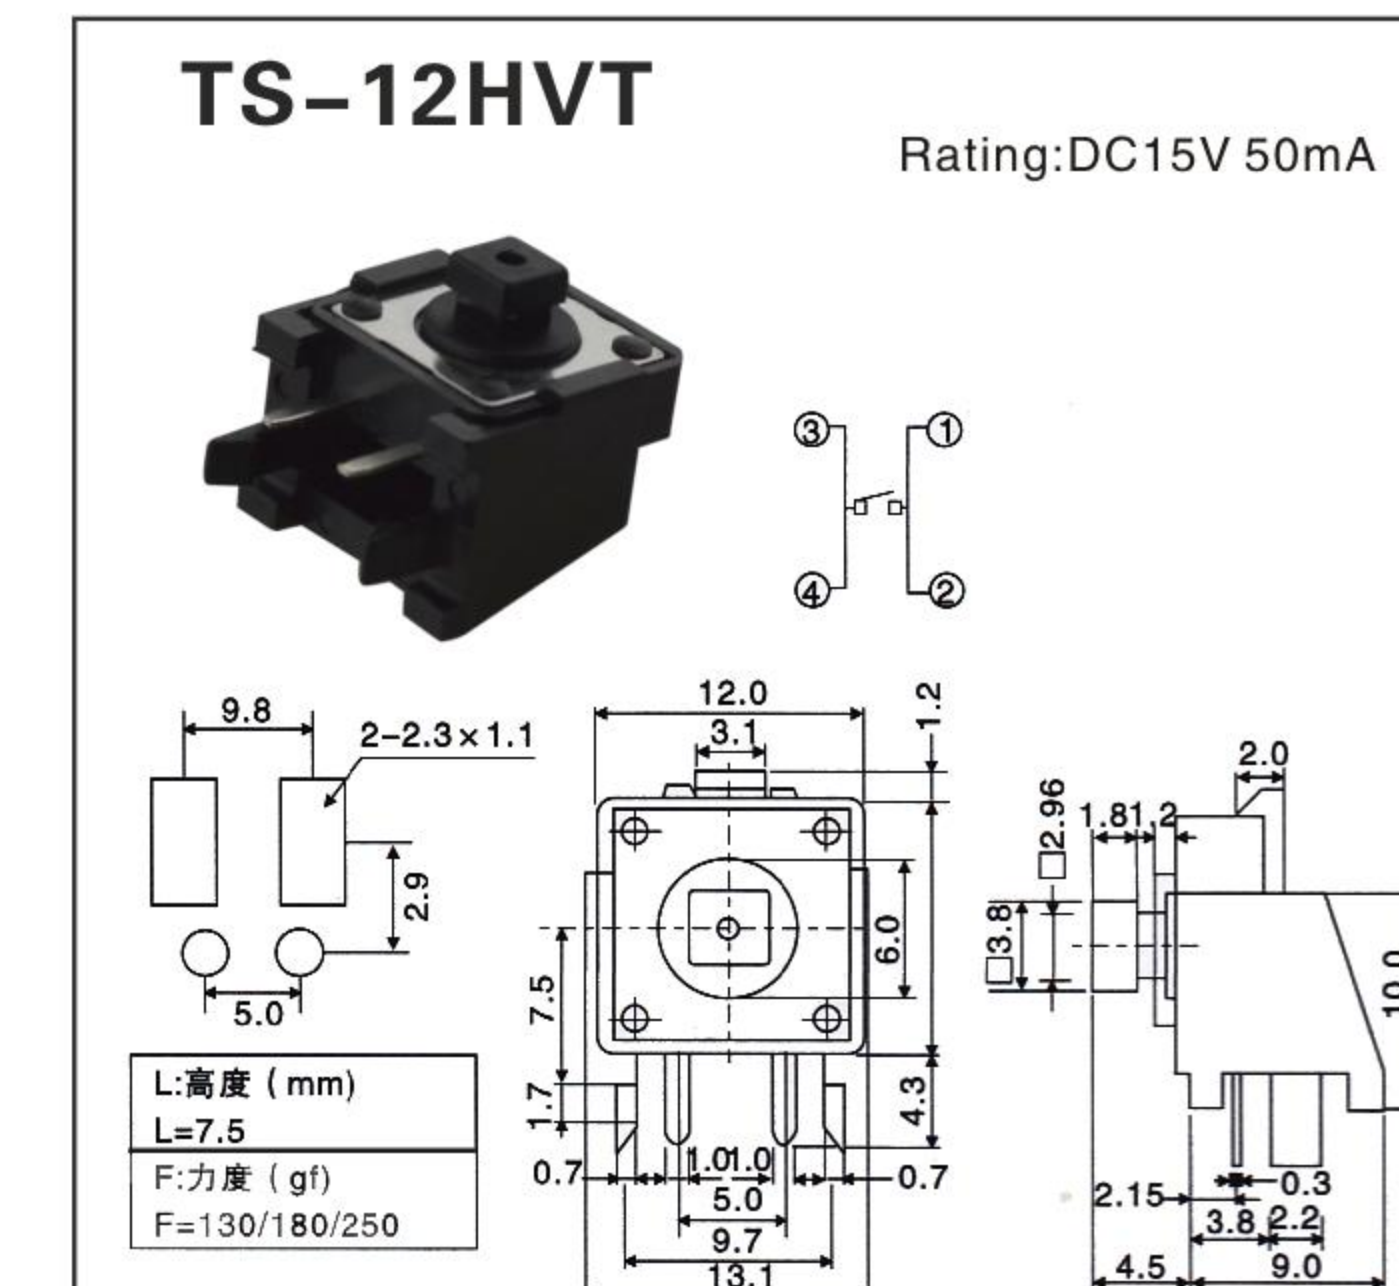
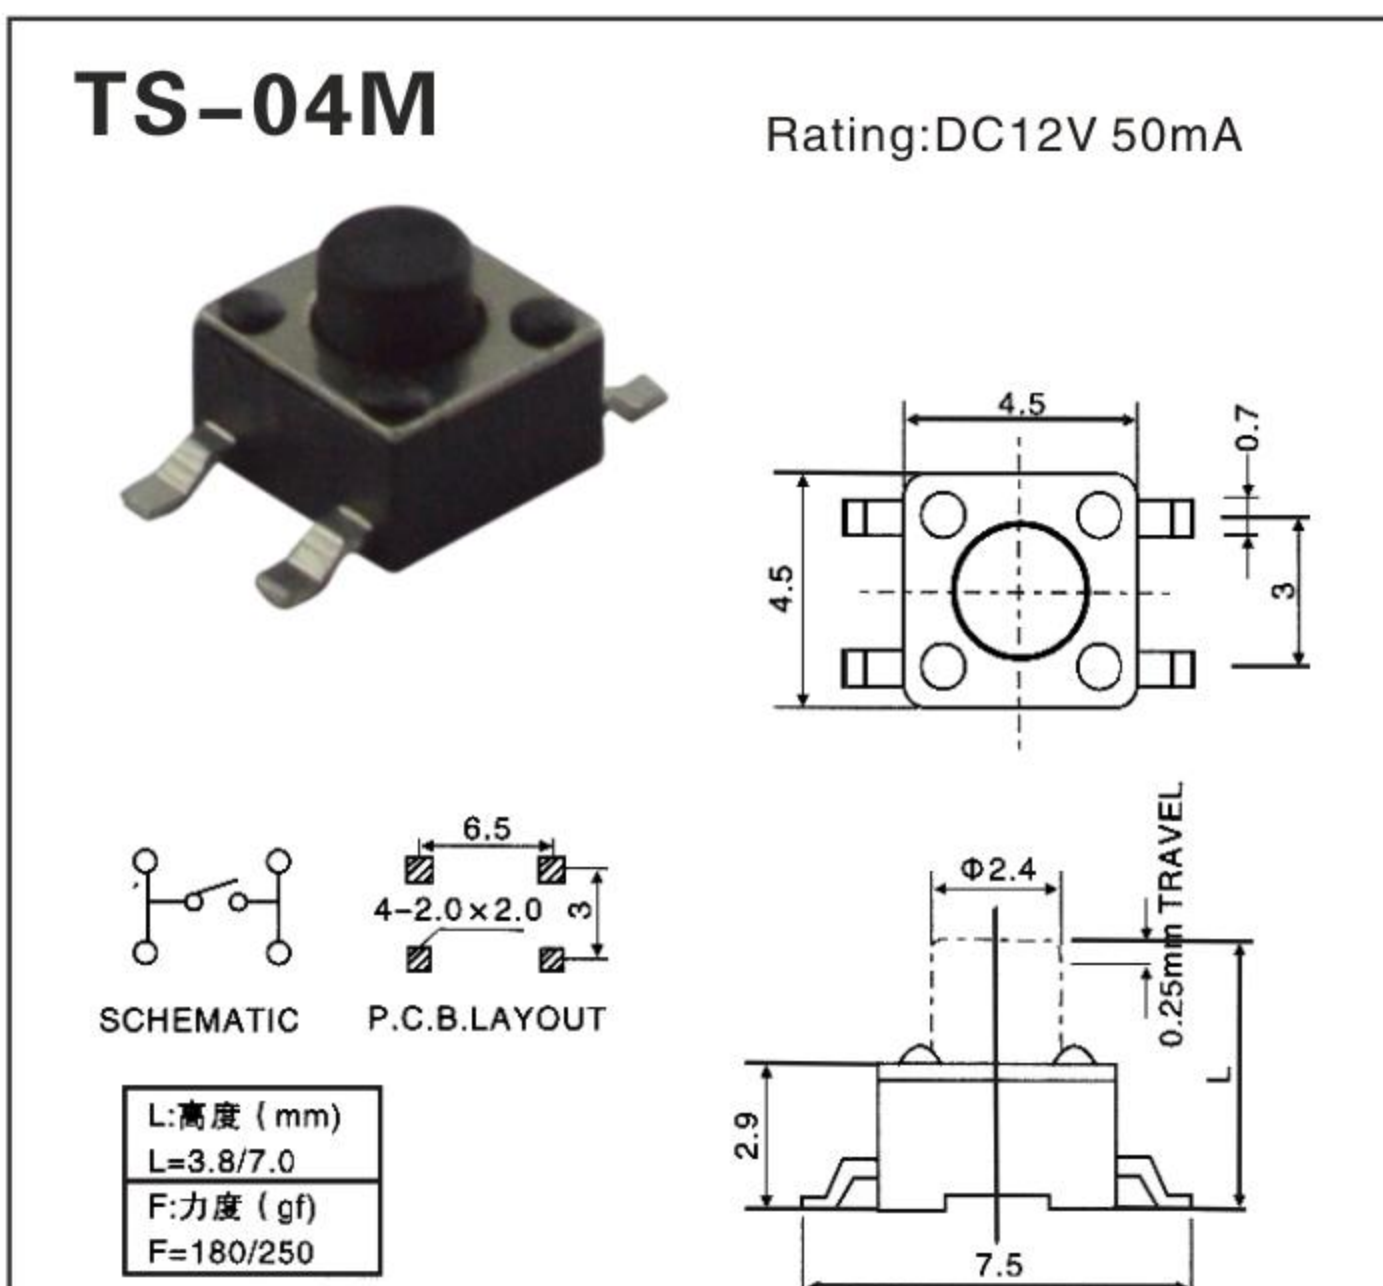
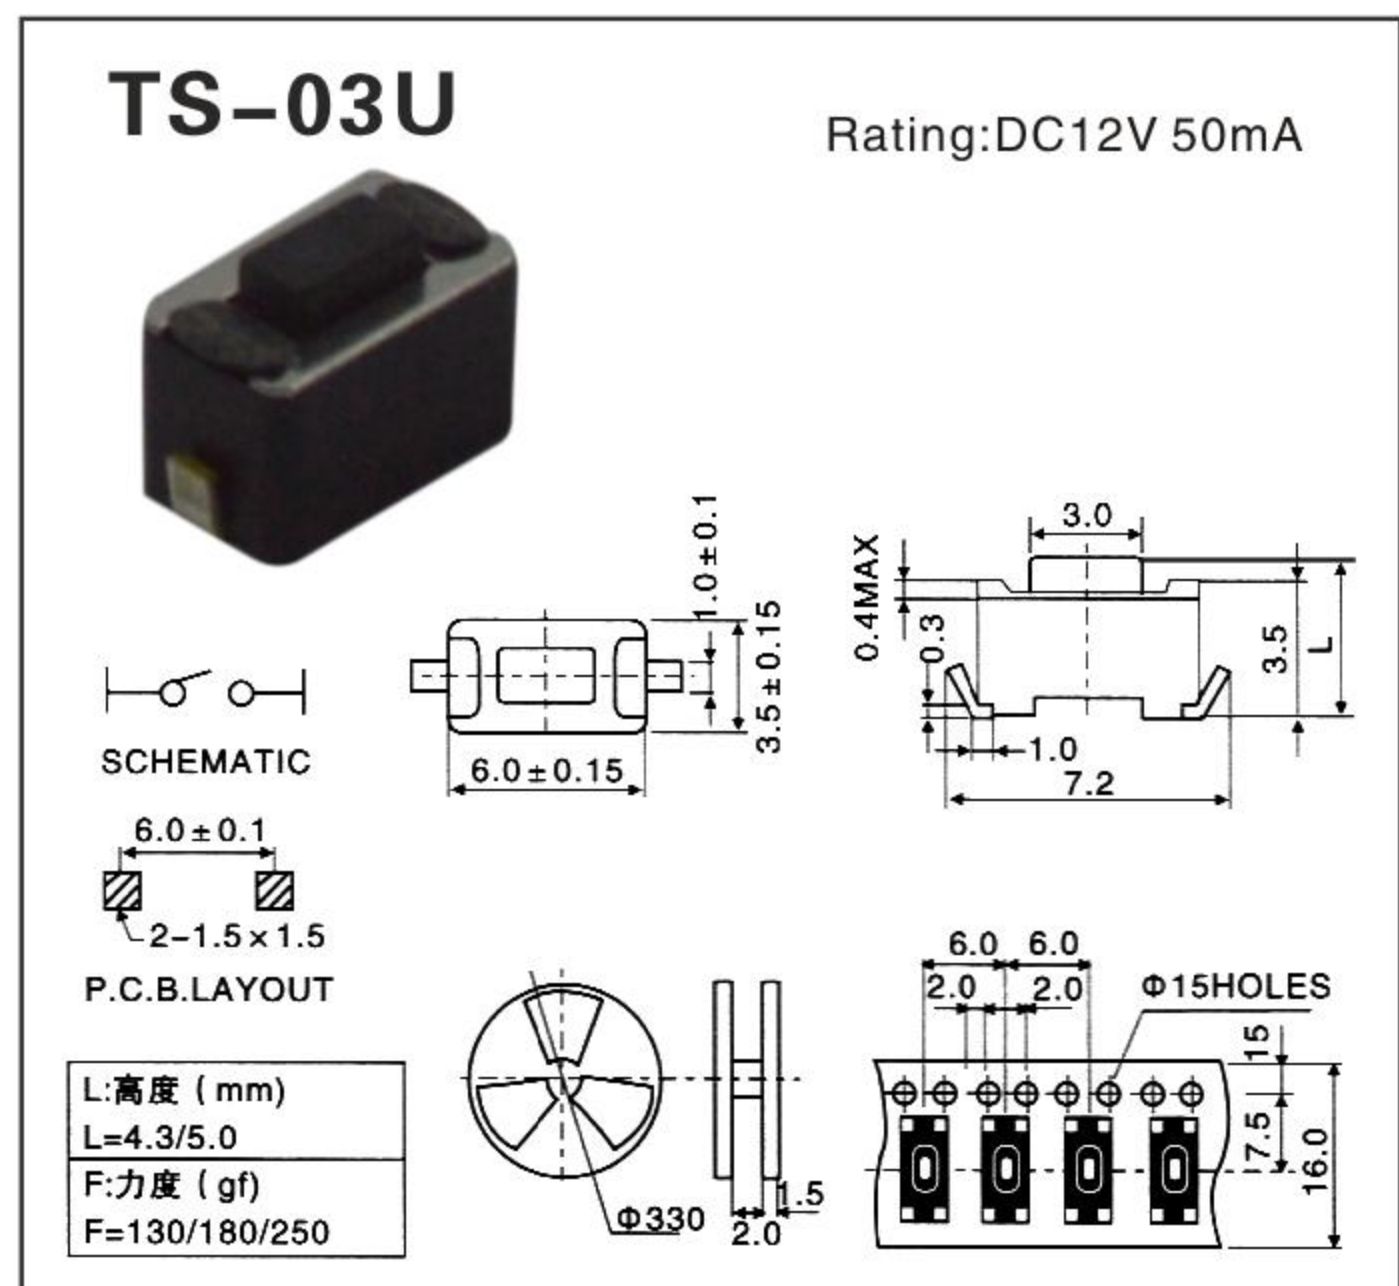
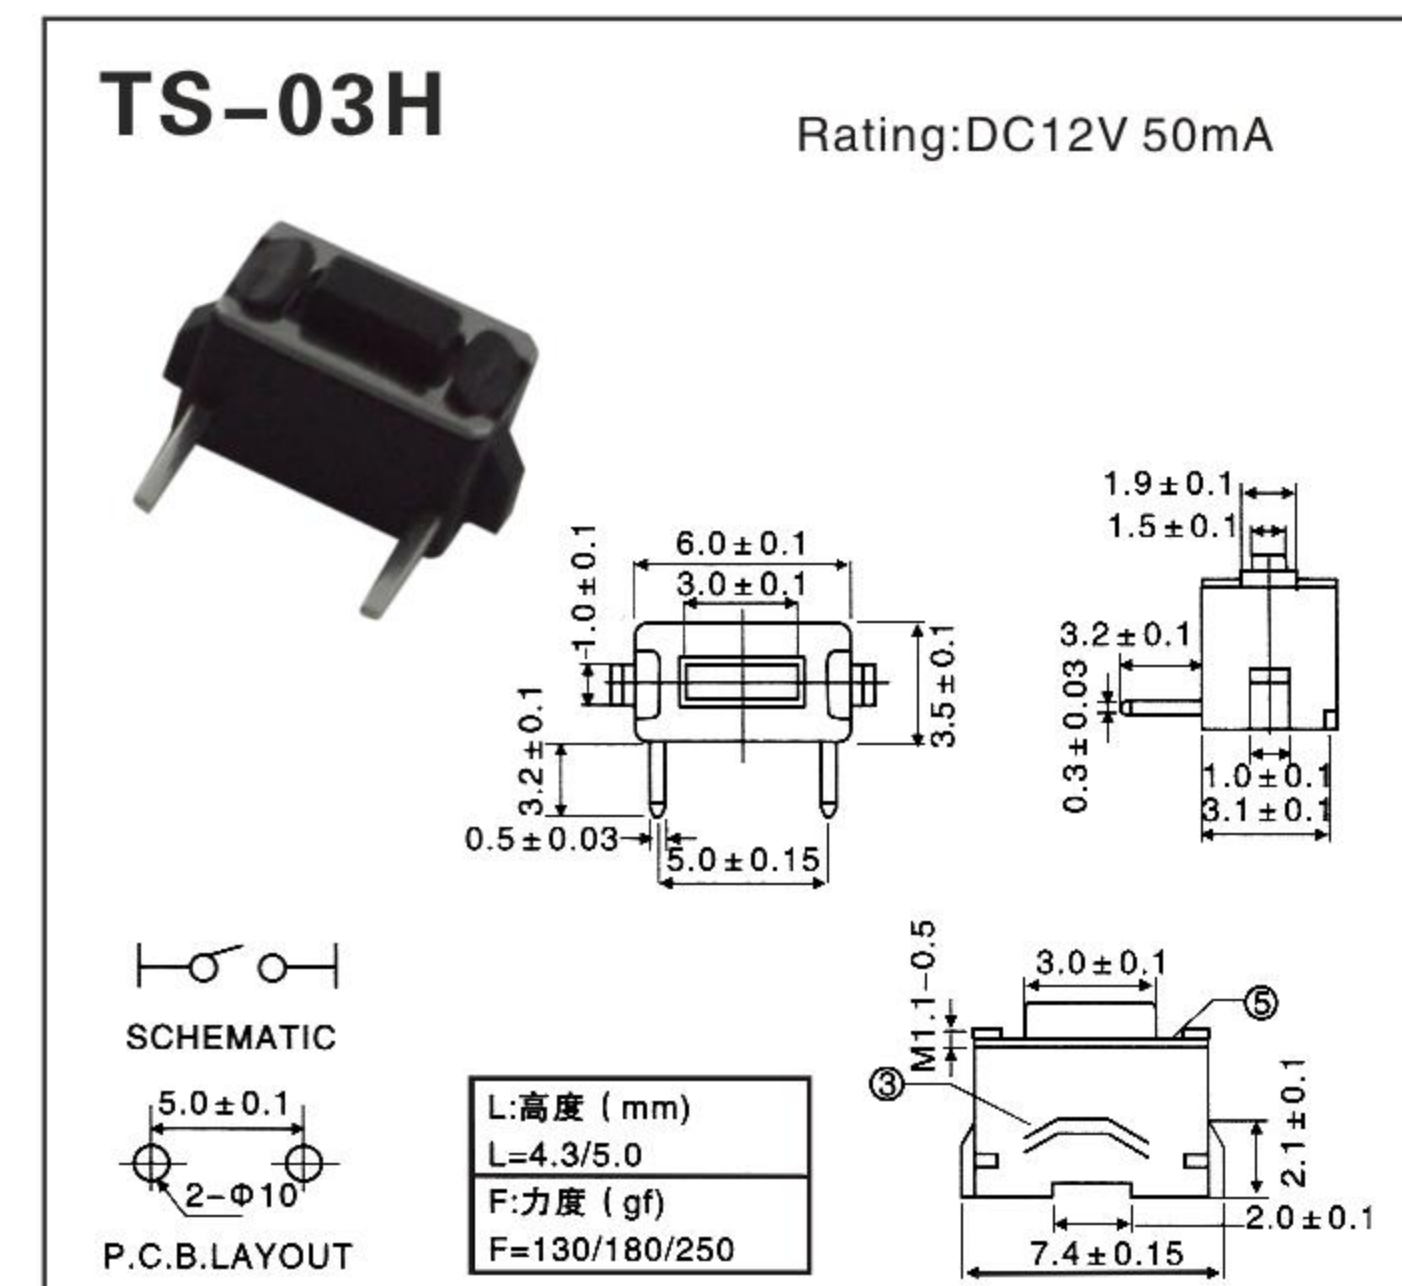
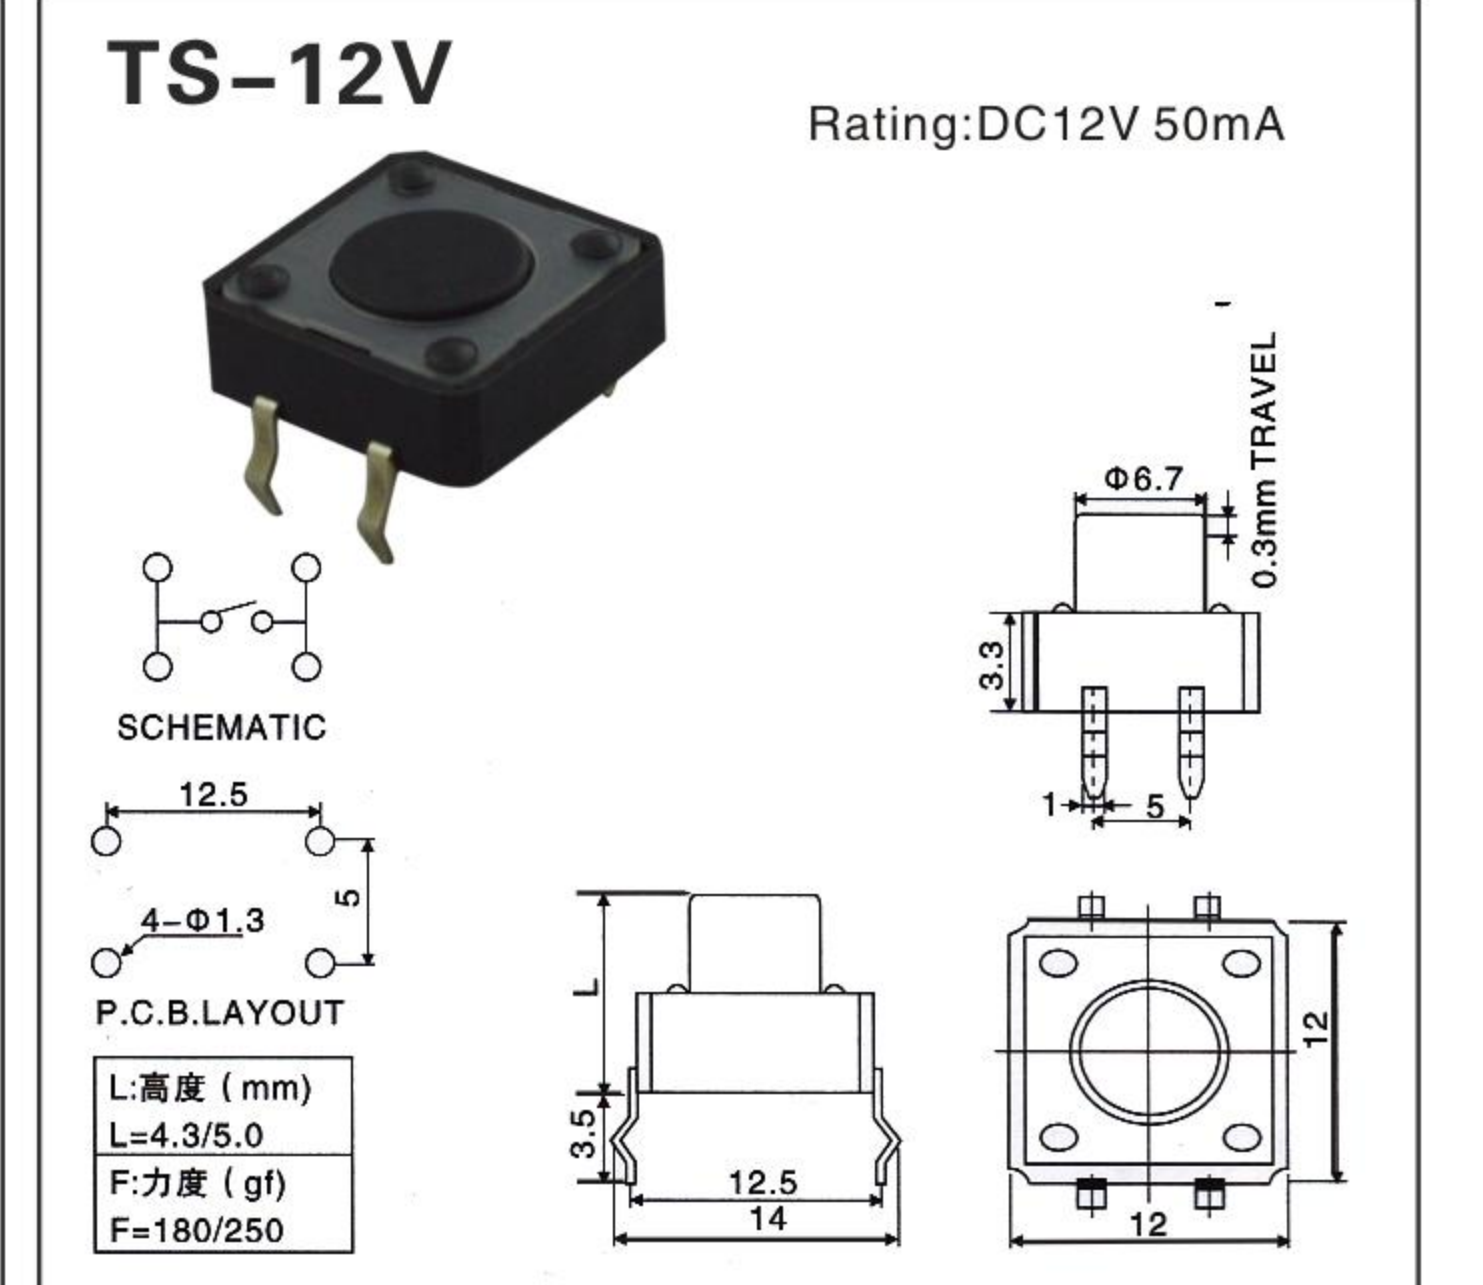
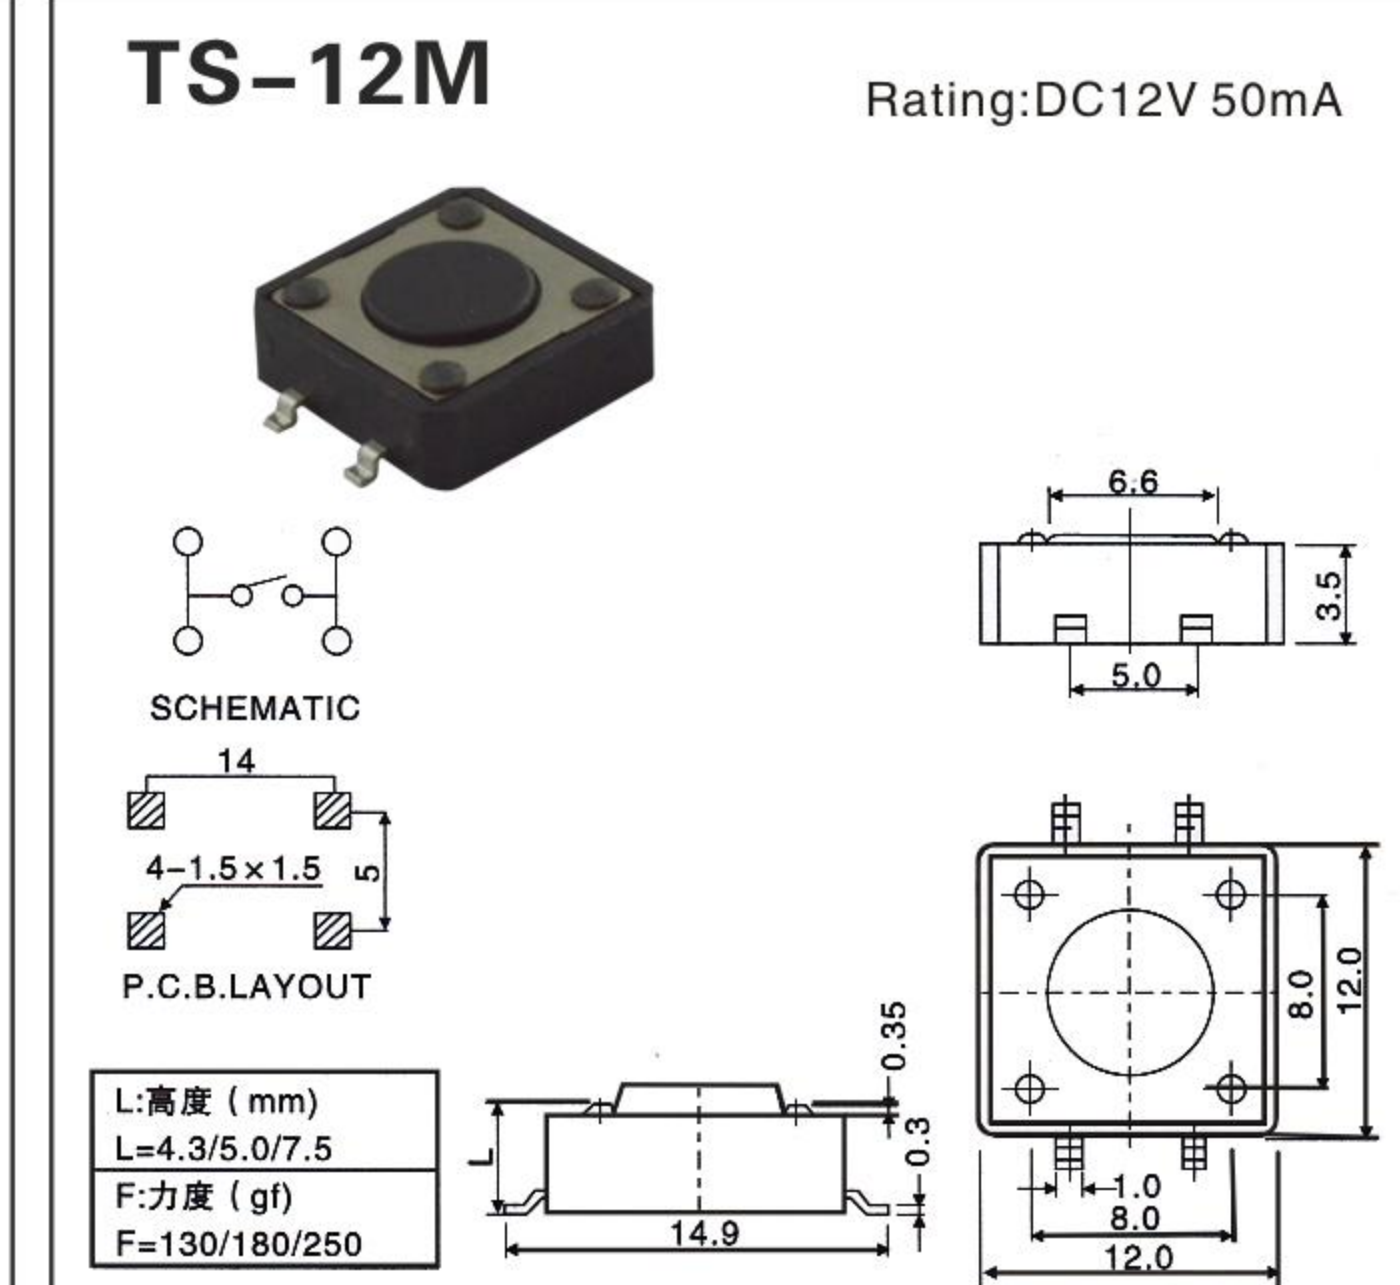
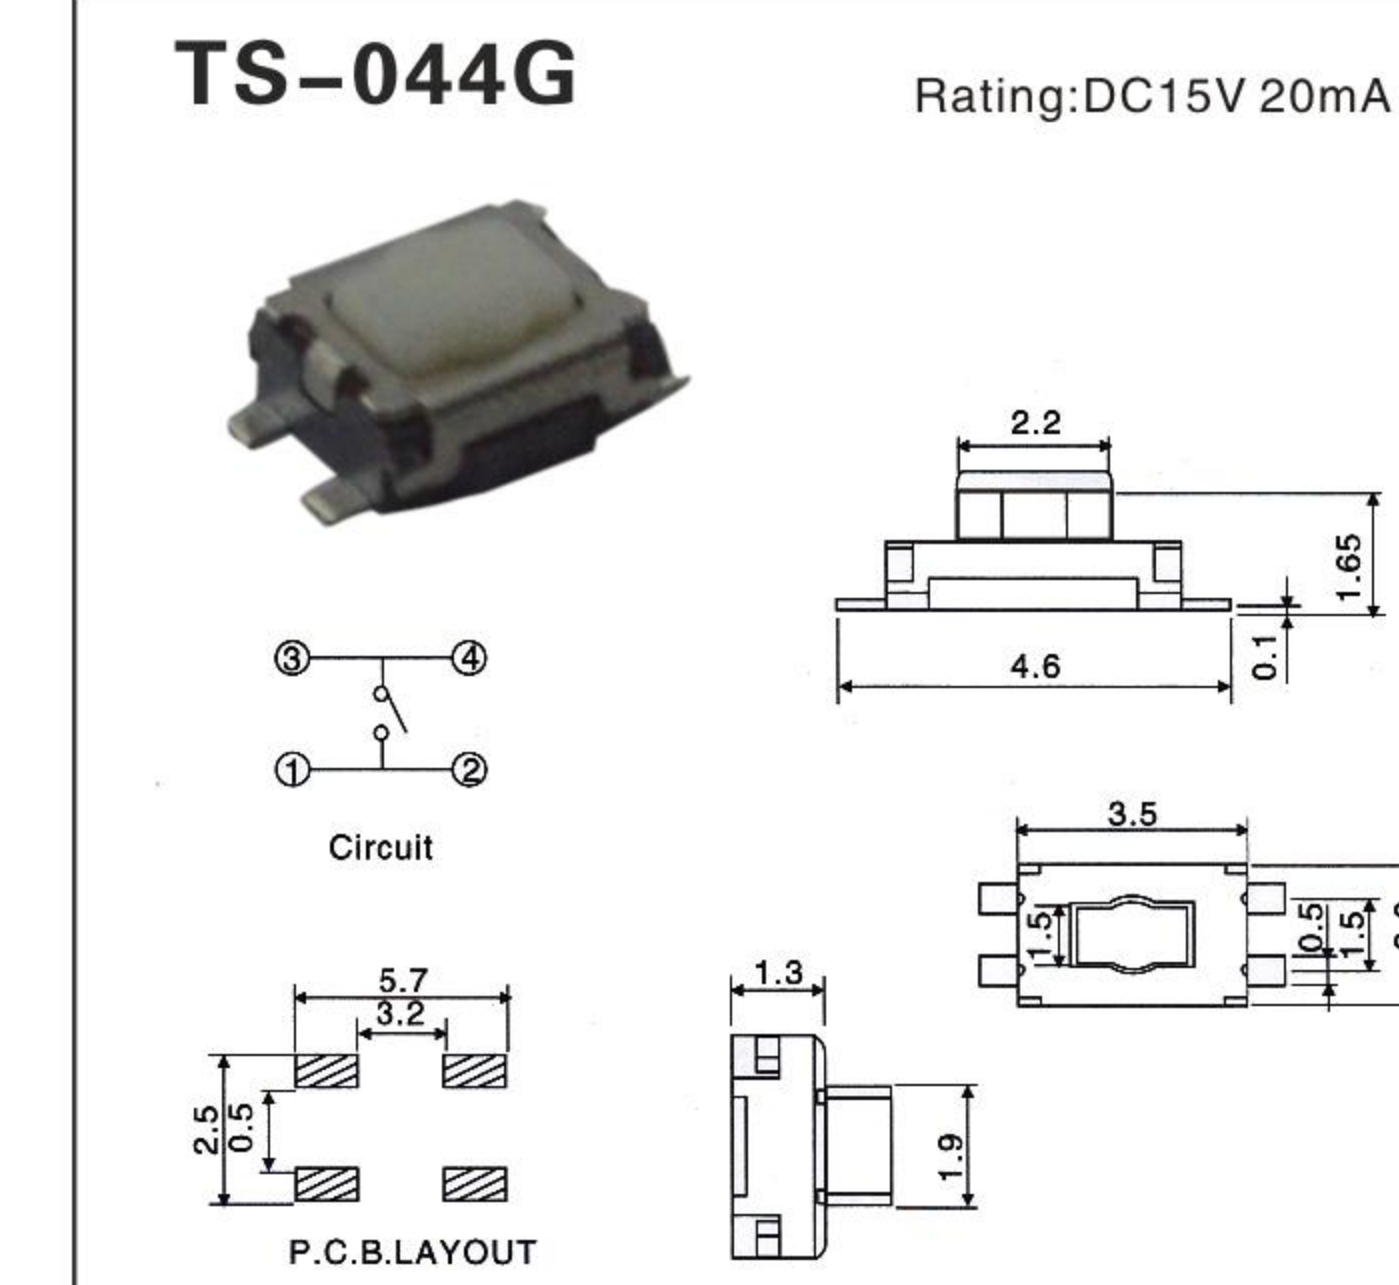
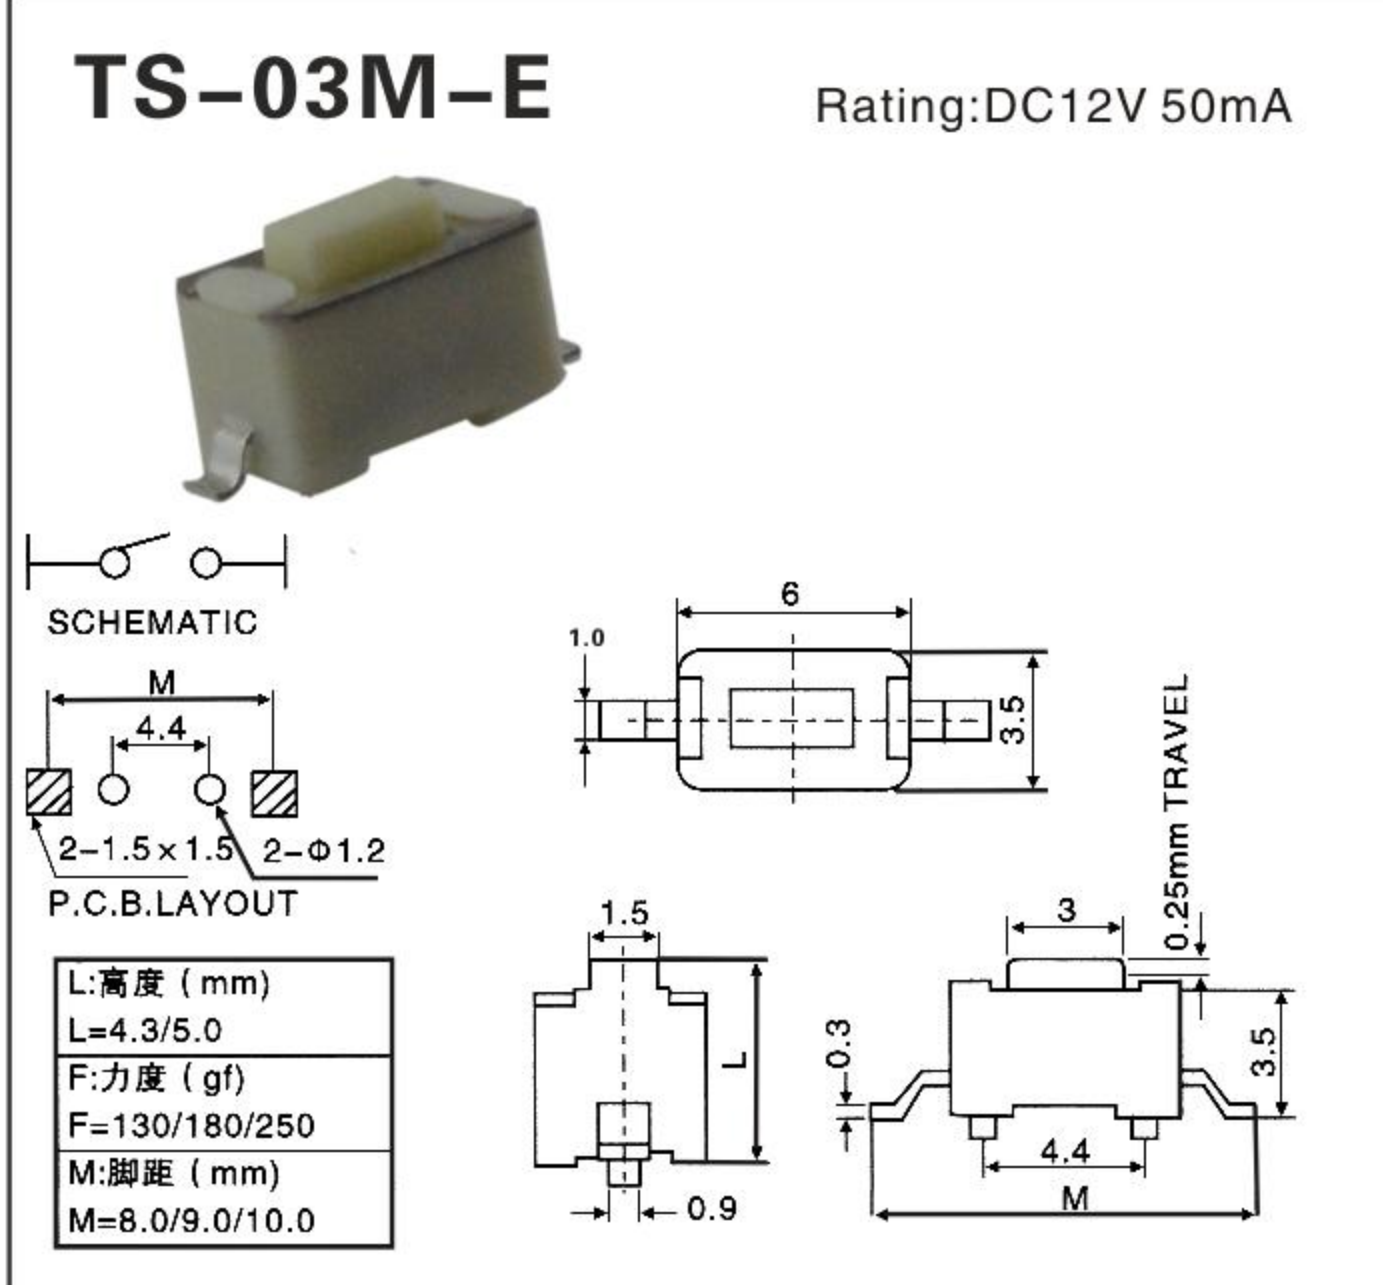
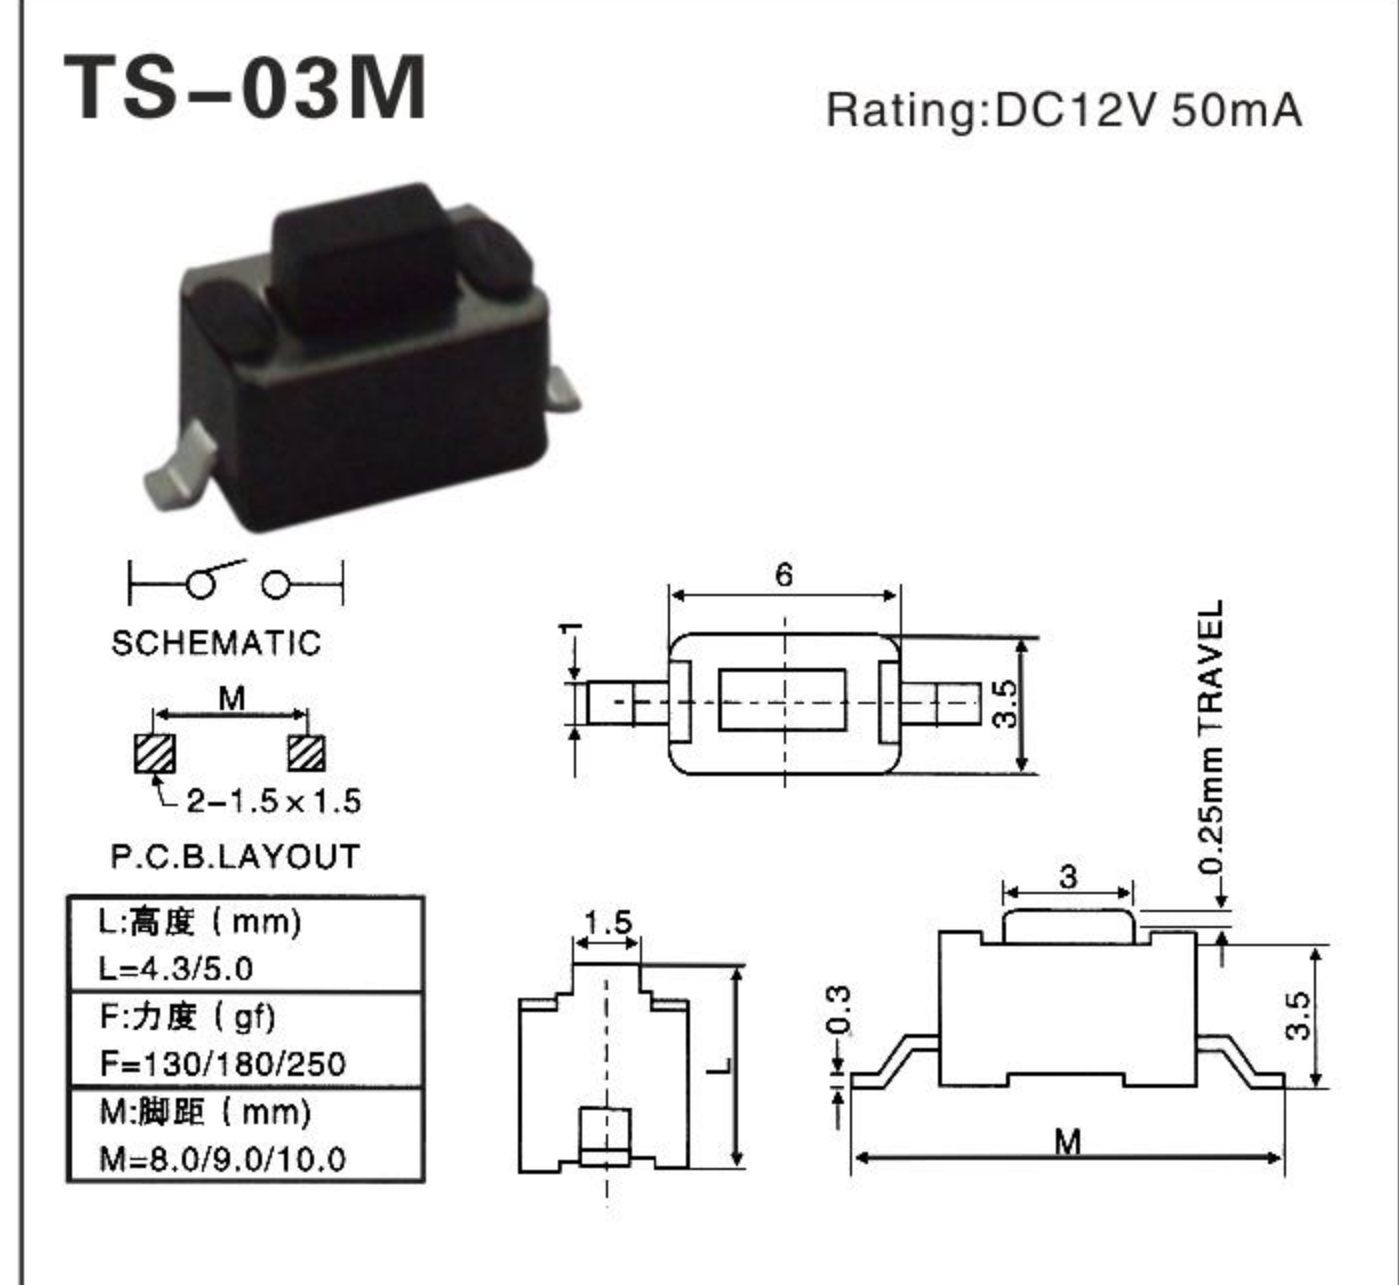
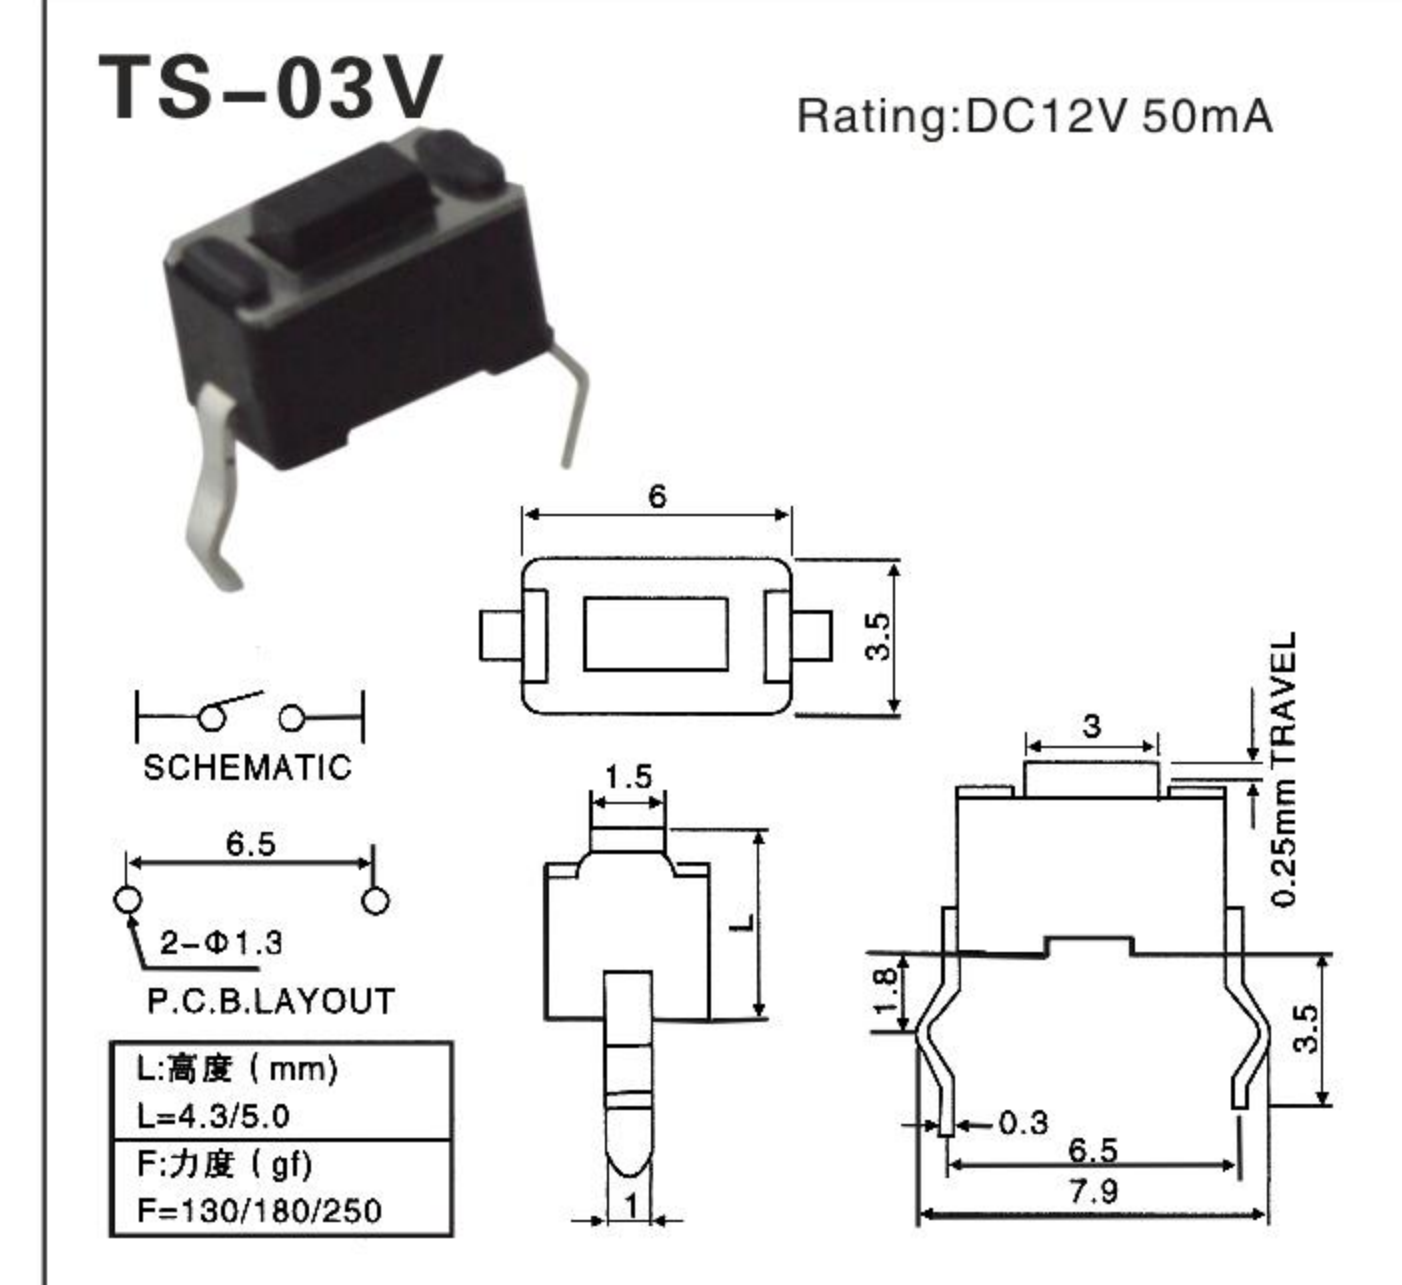


輕觸開關 TACT SWITCH

05

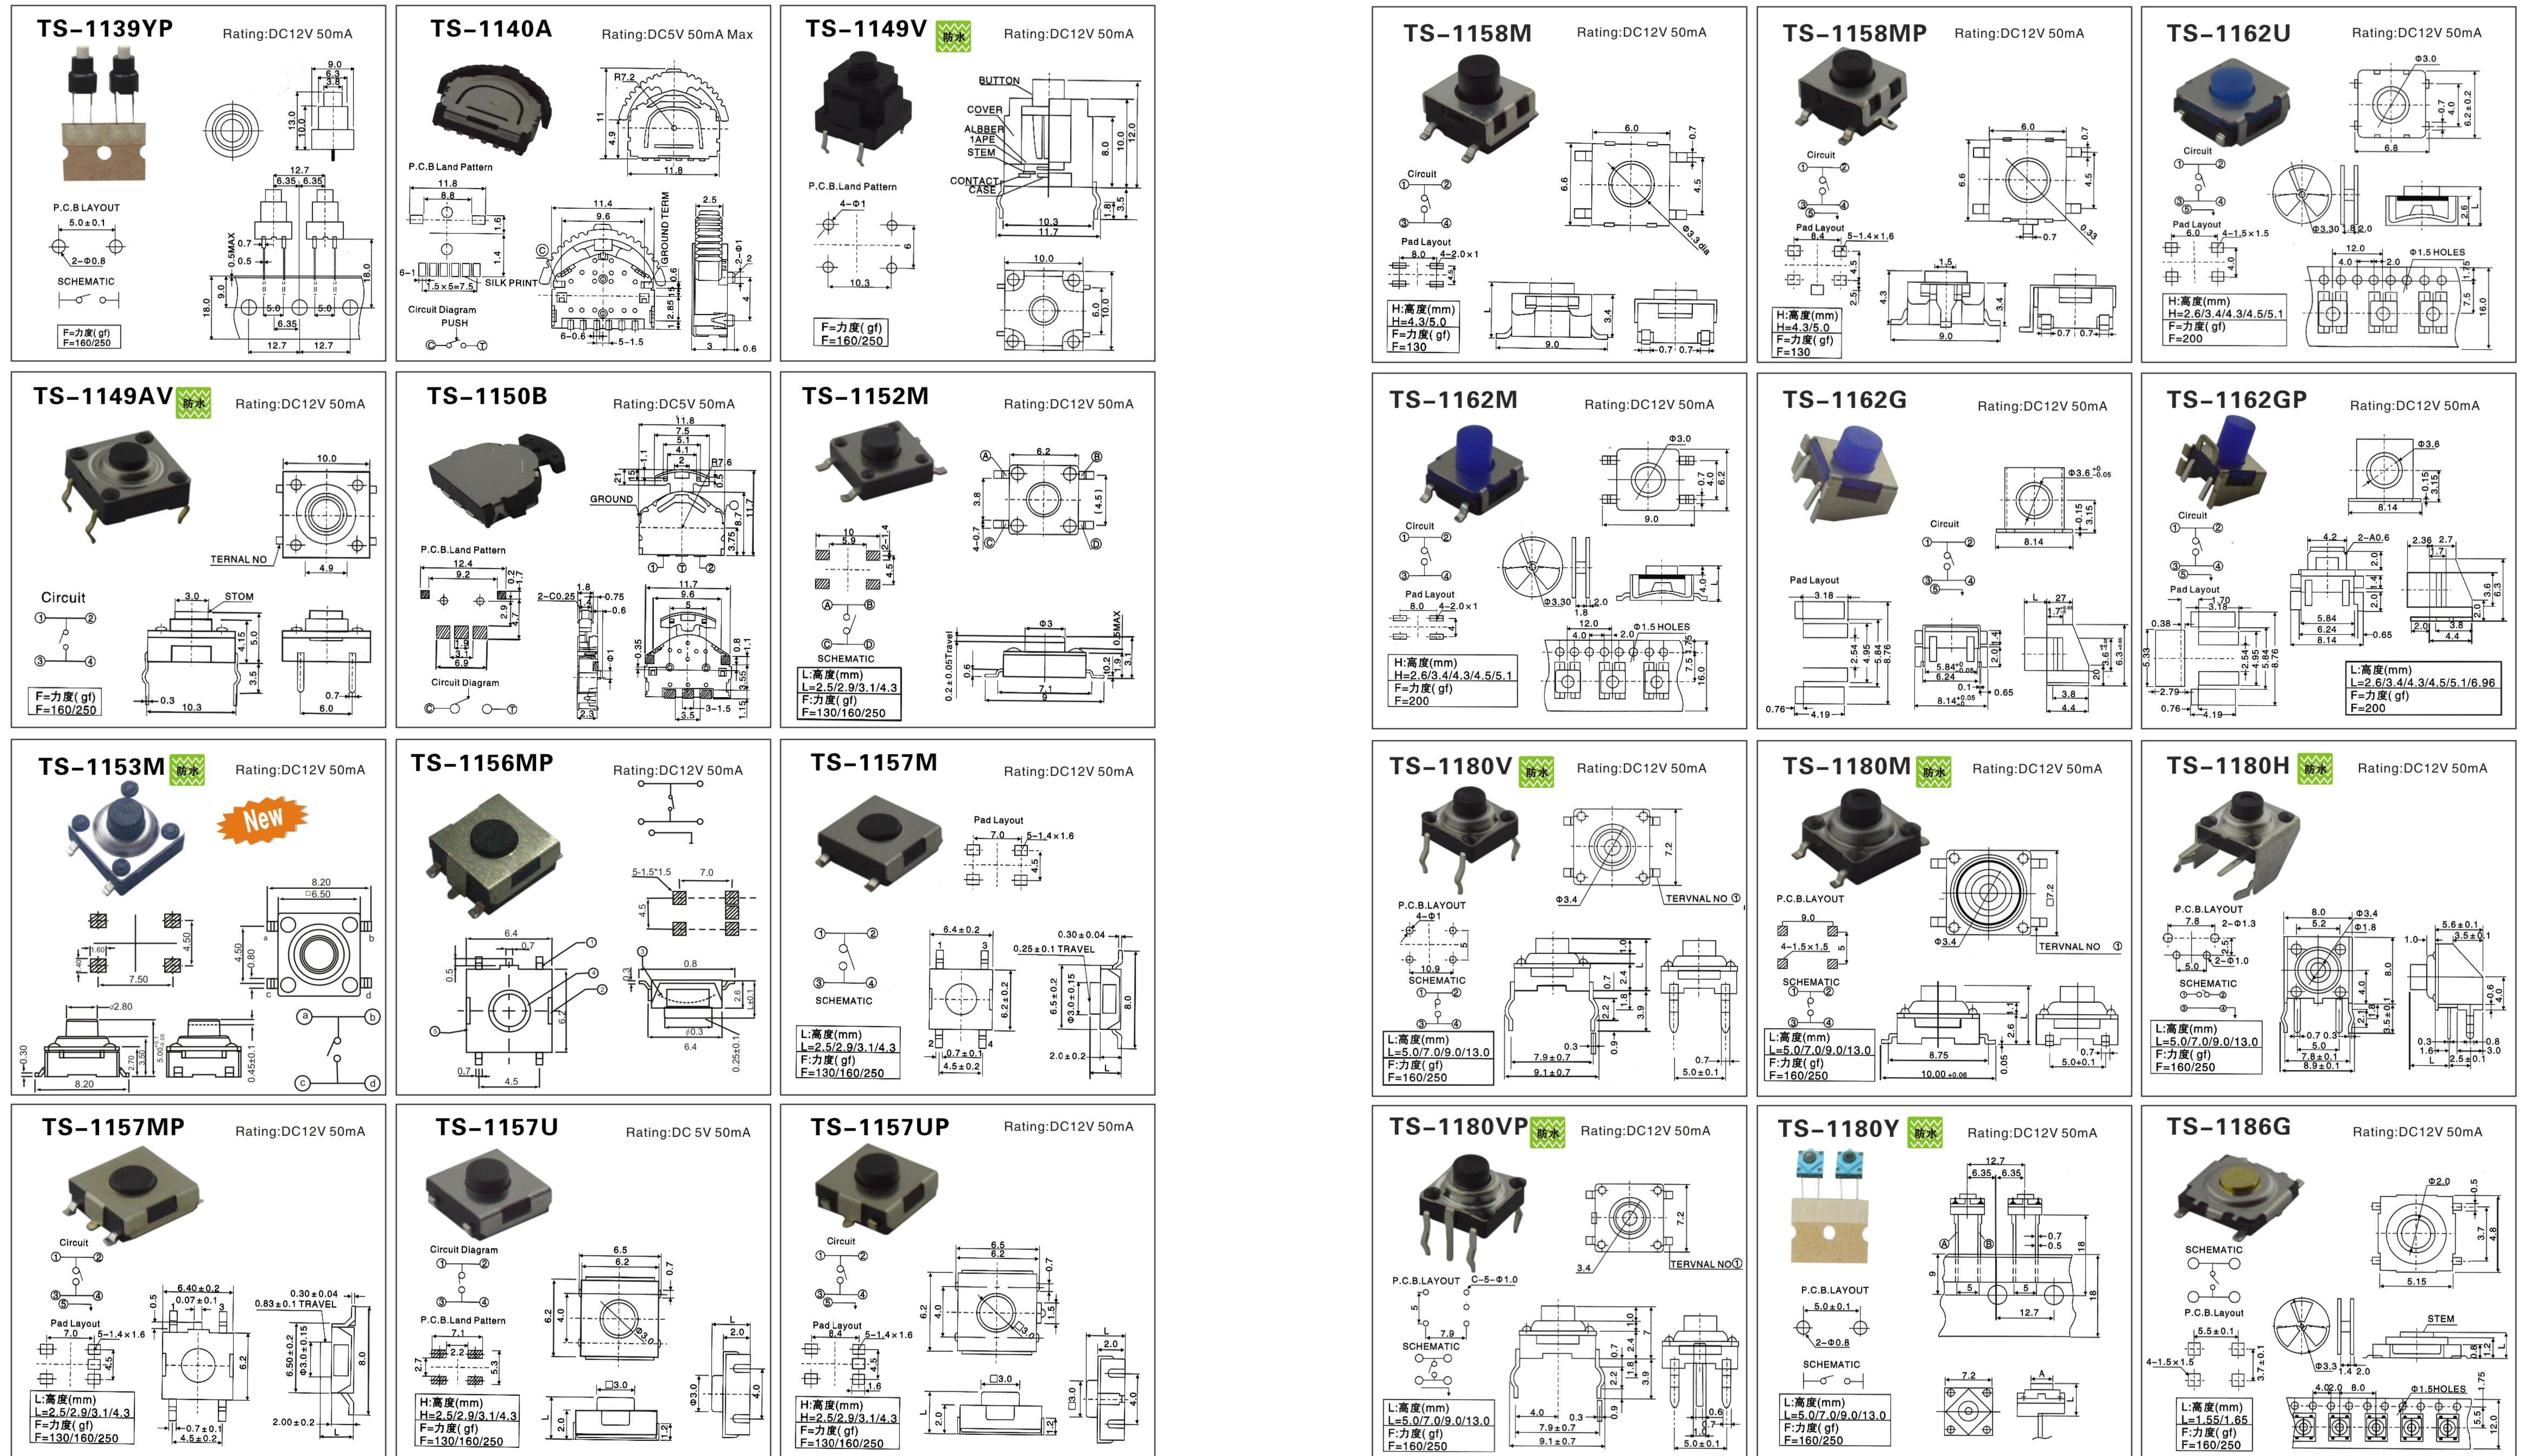


輕觸開關 TACT SWITCH

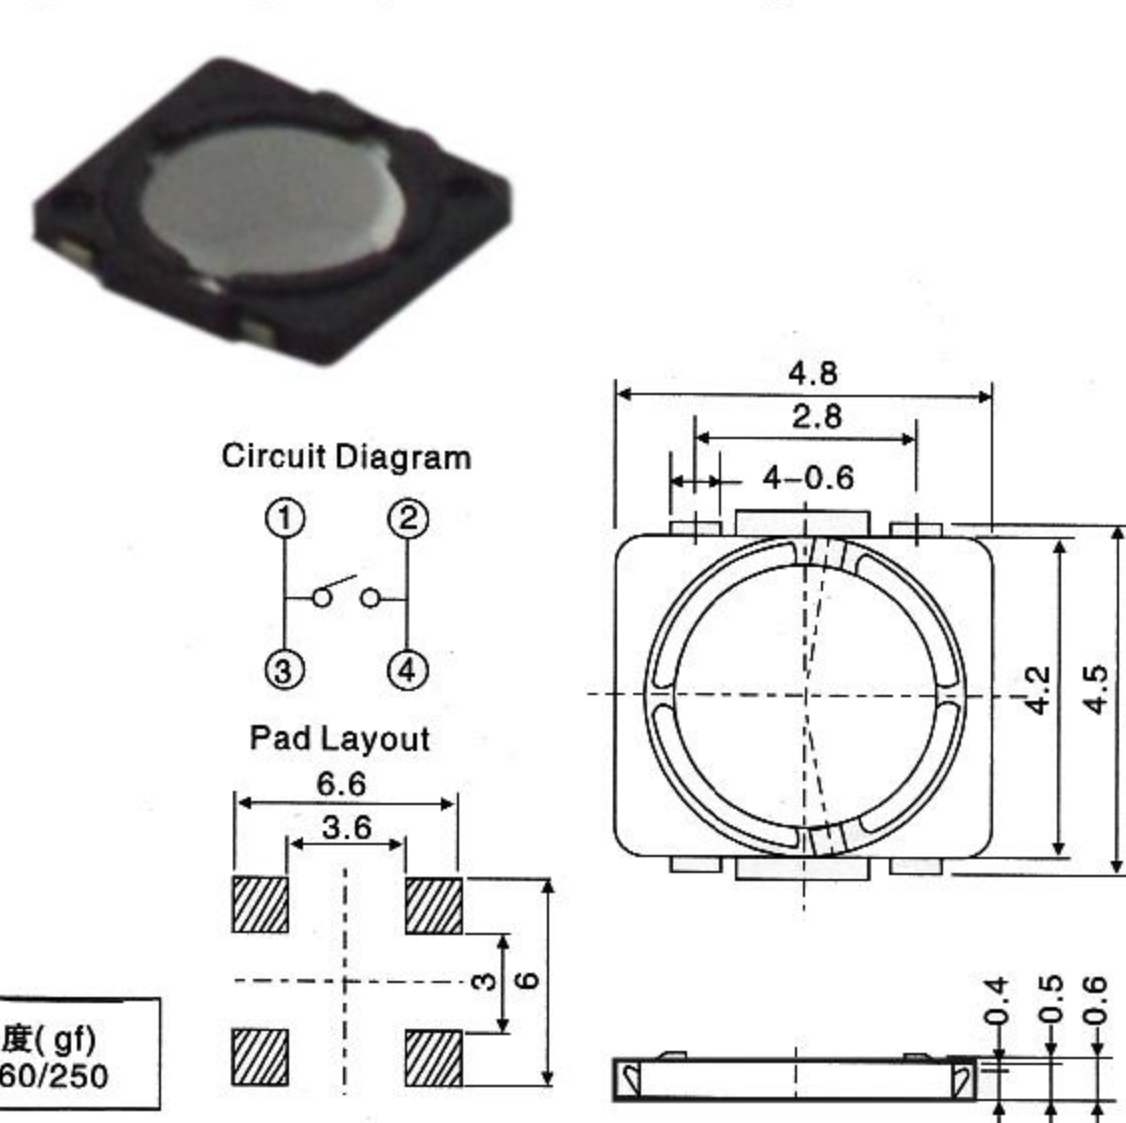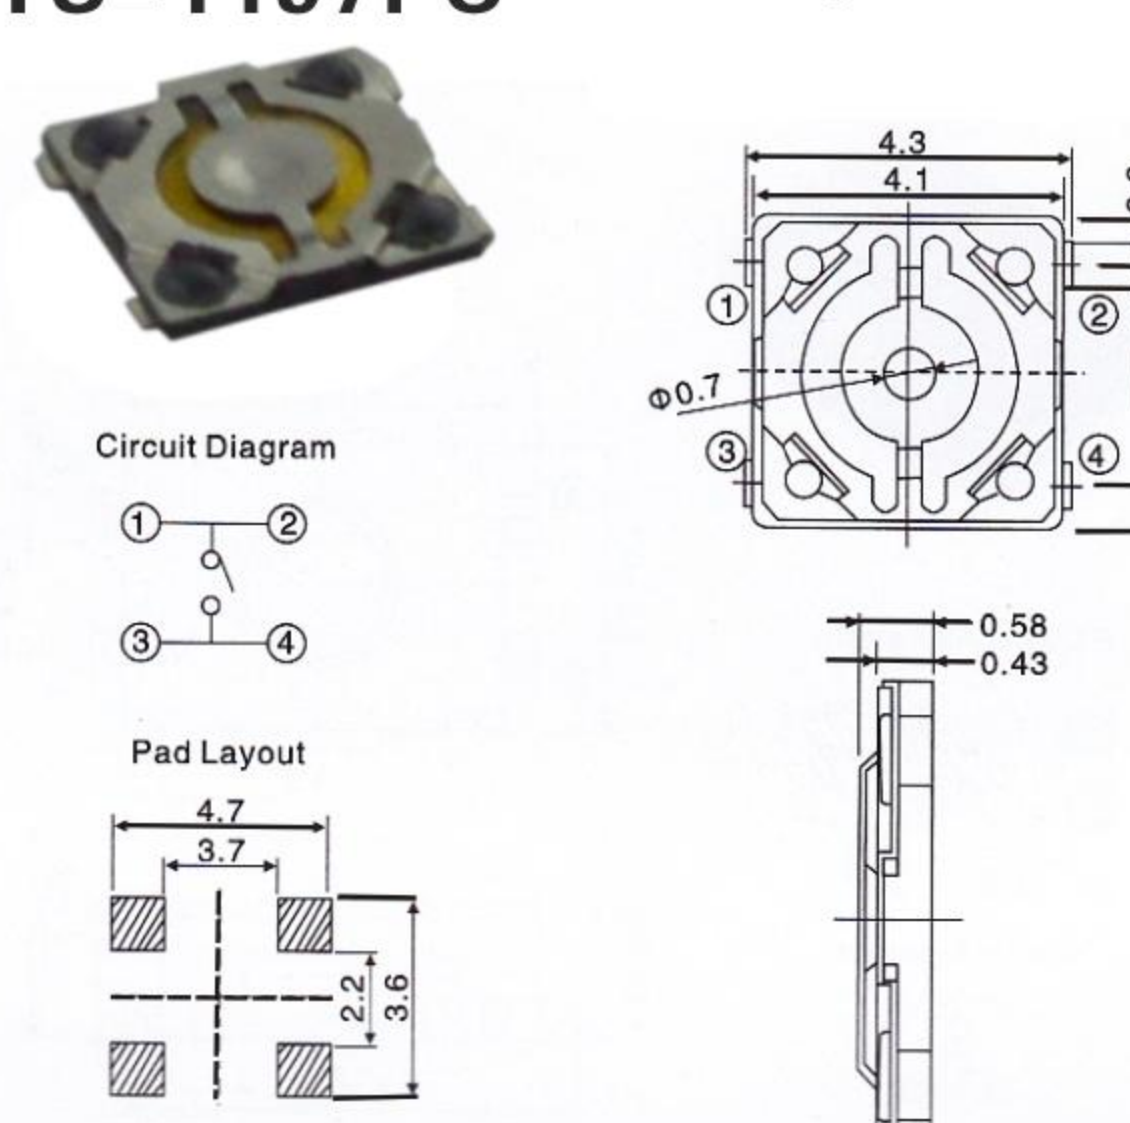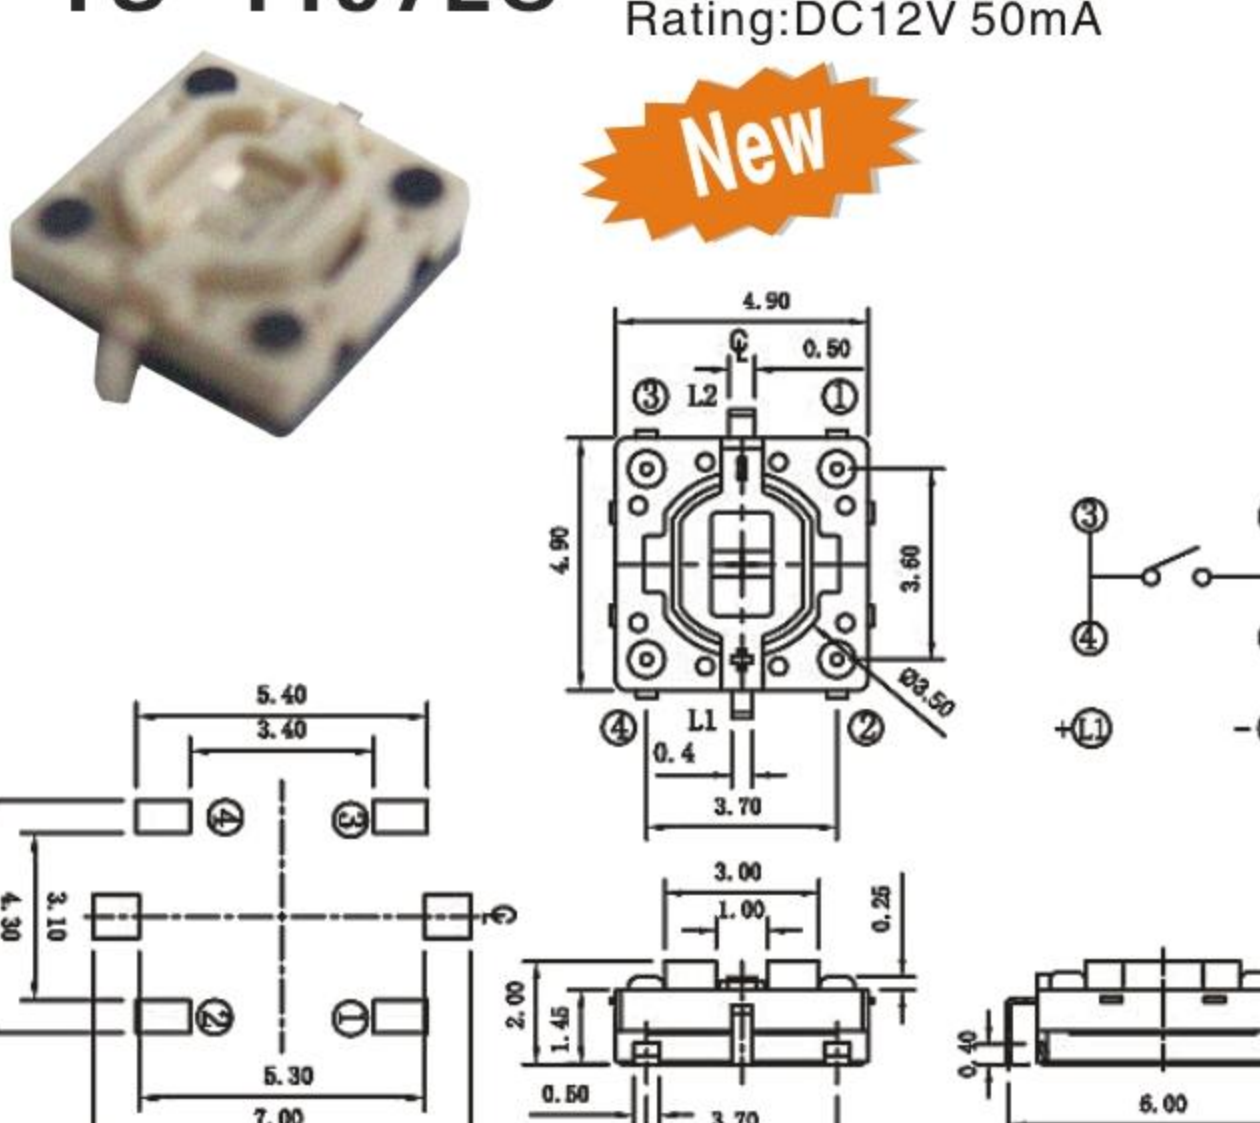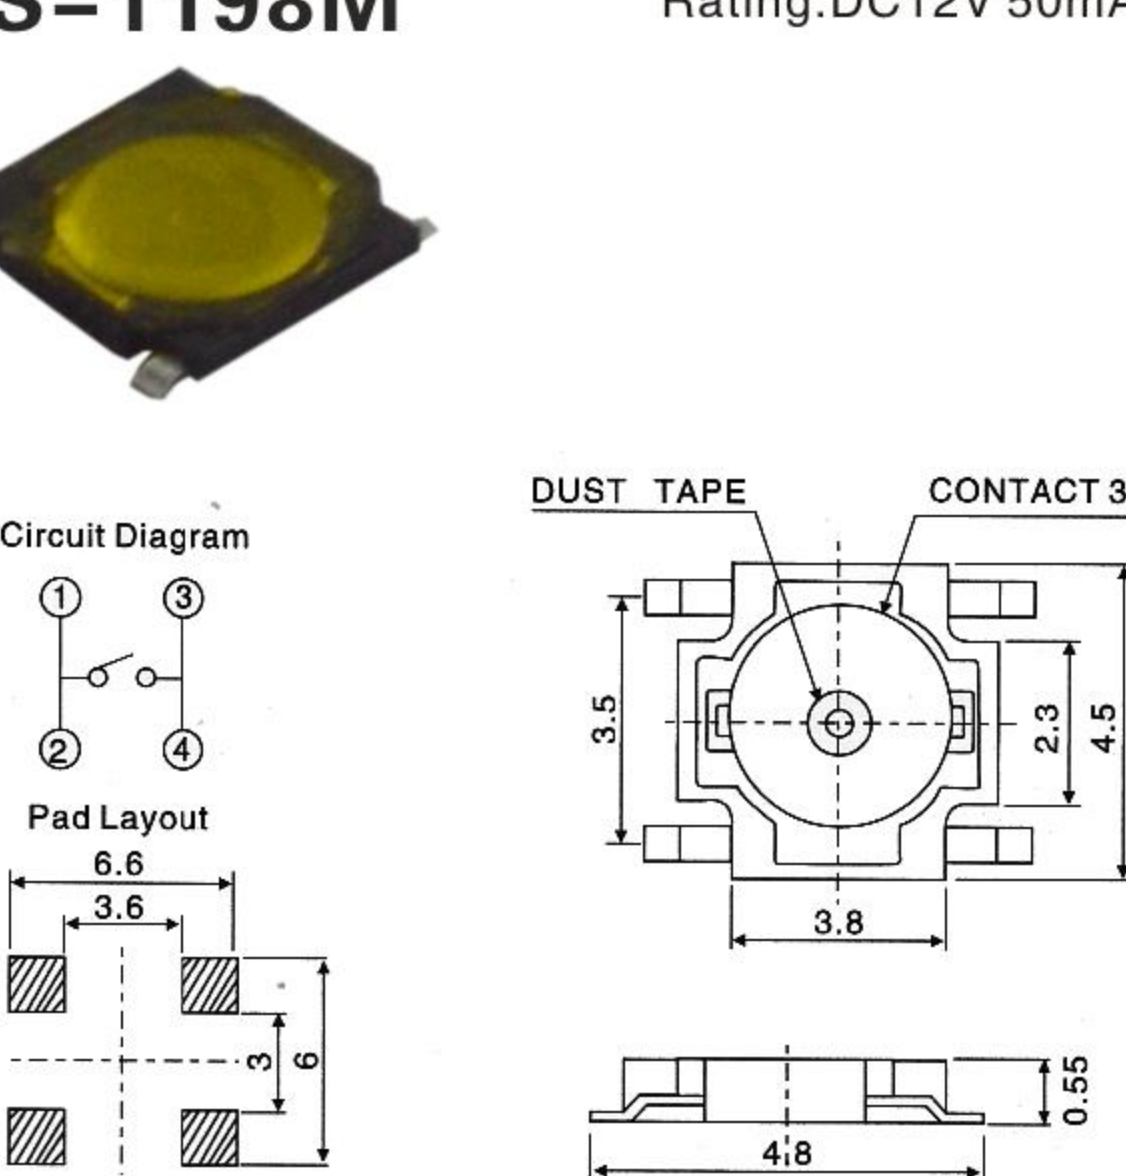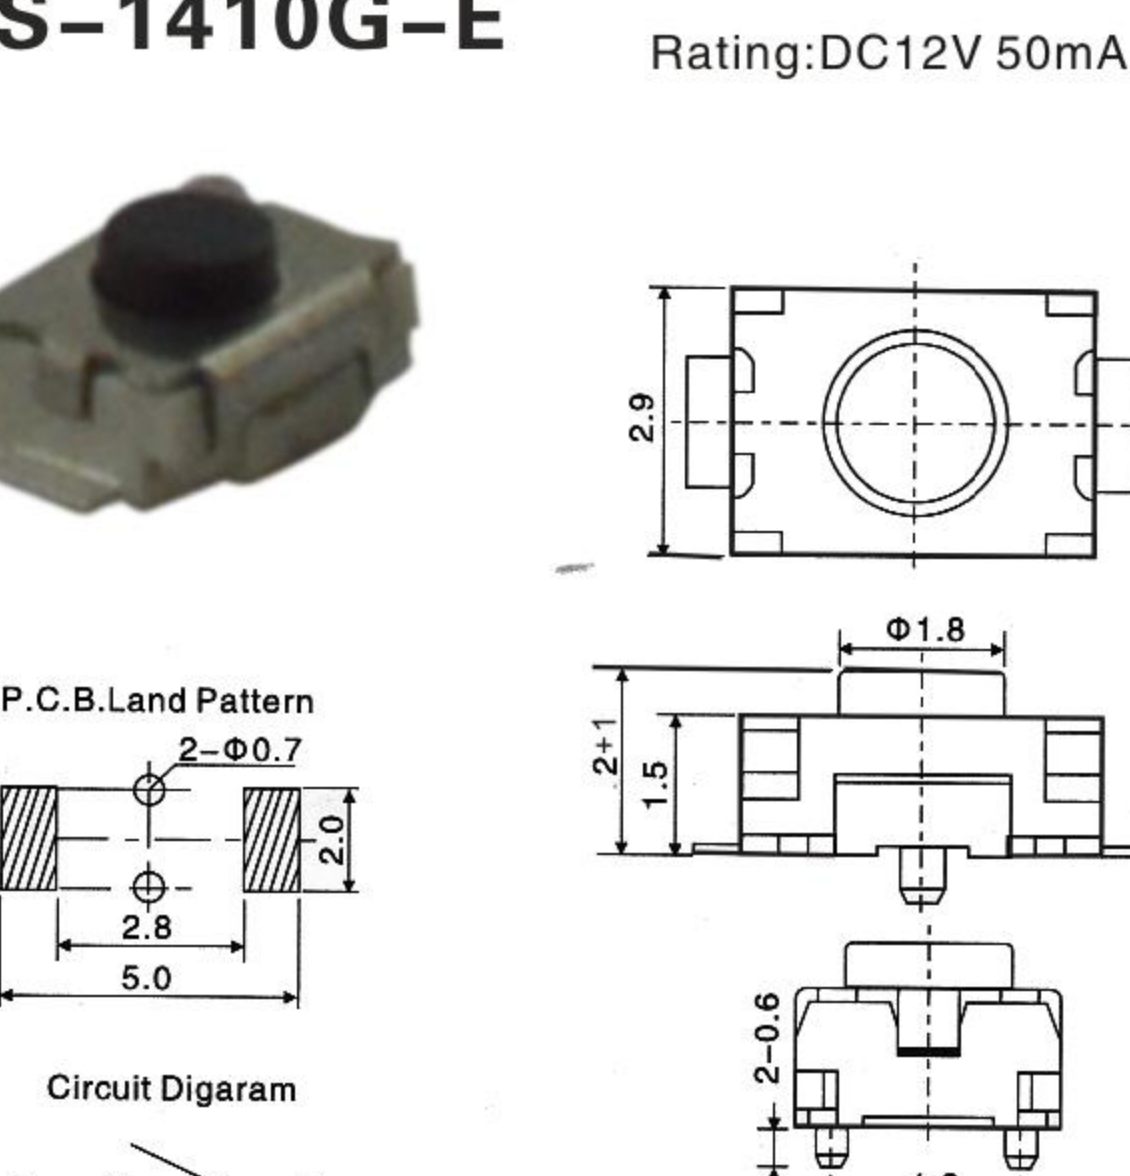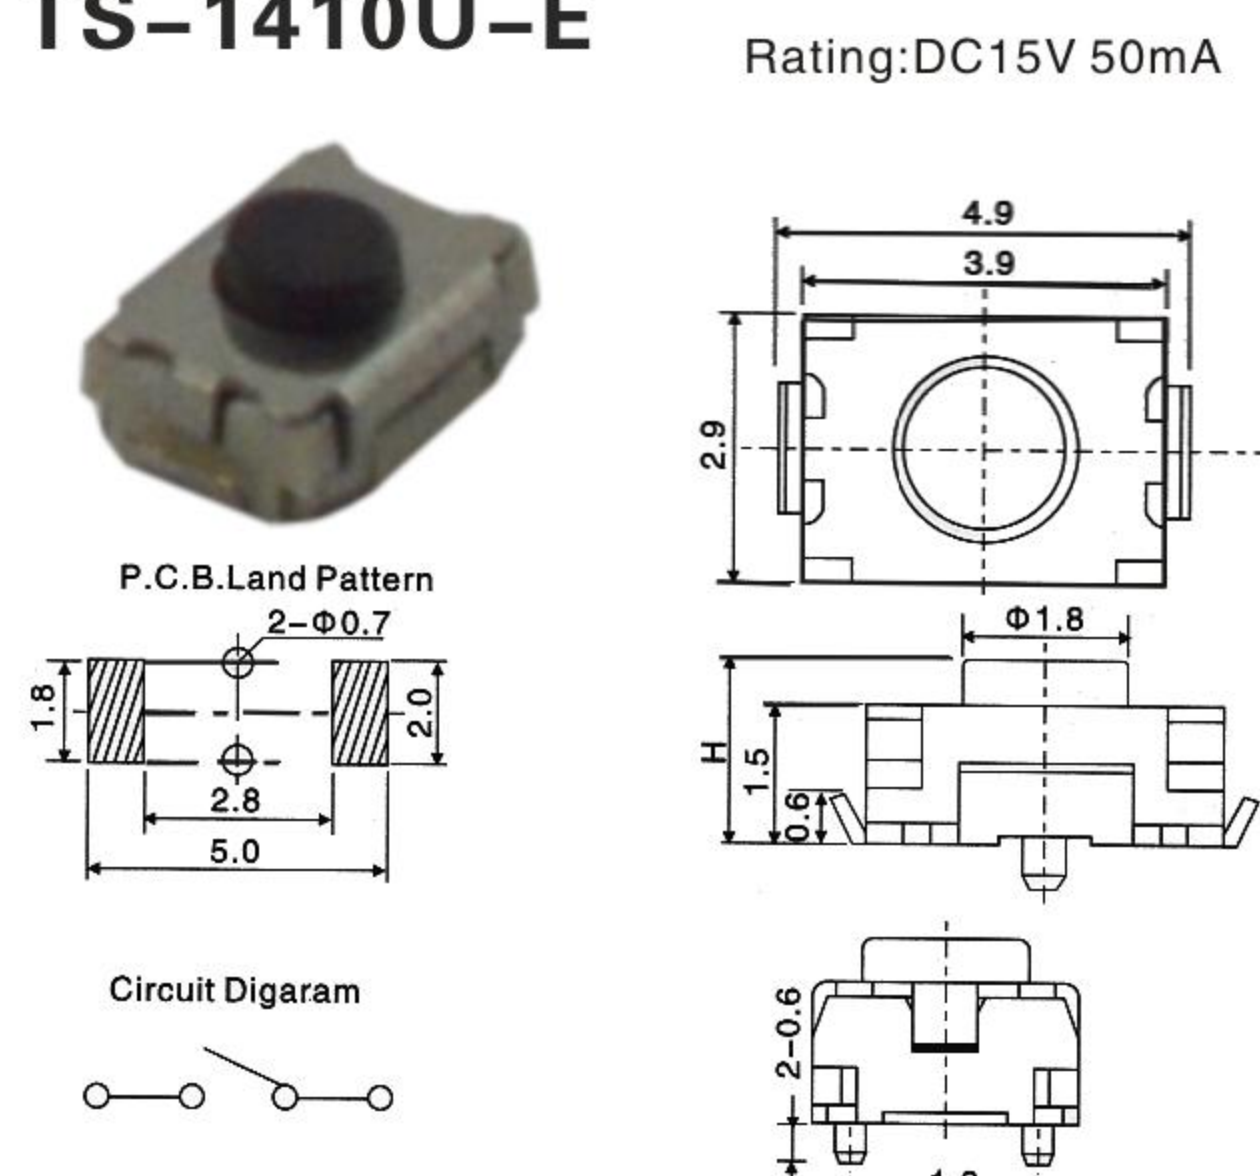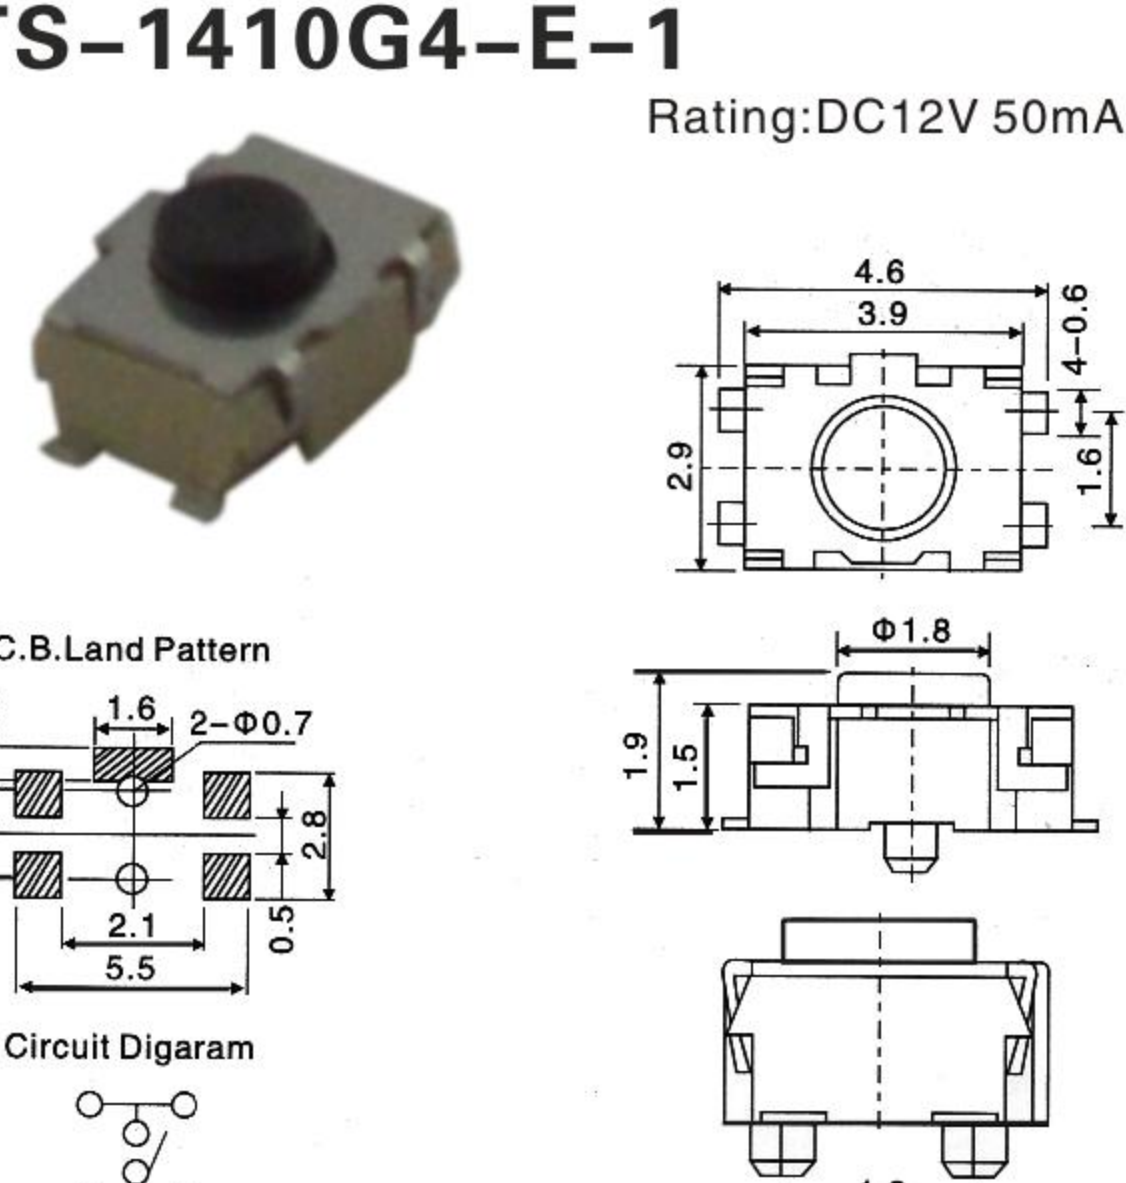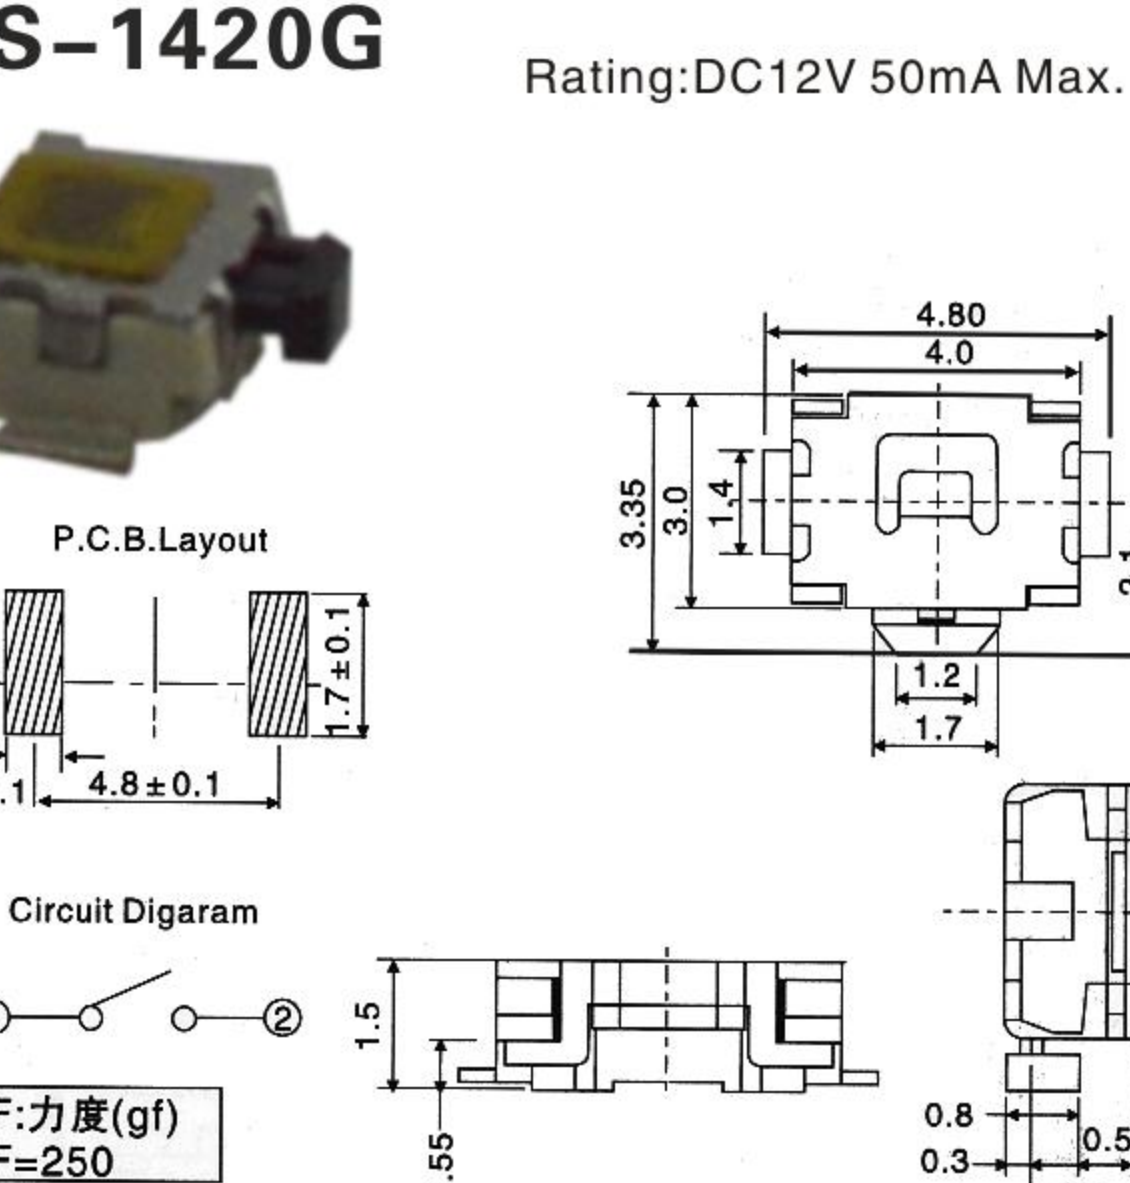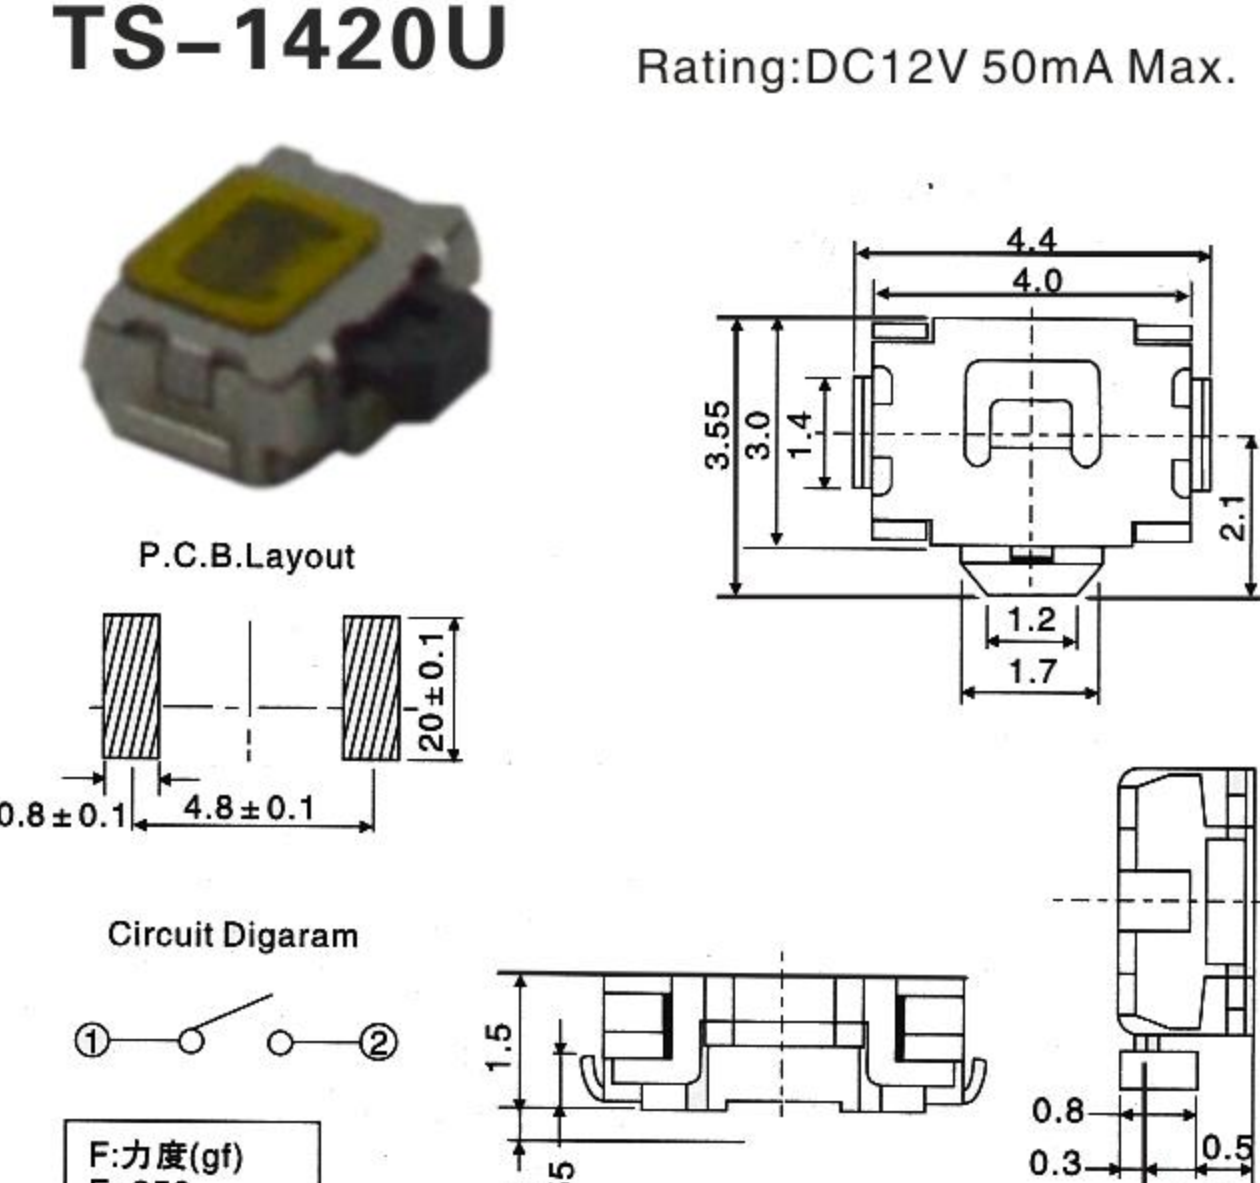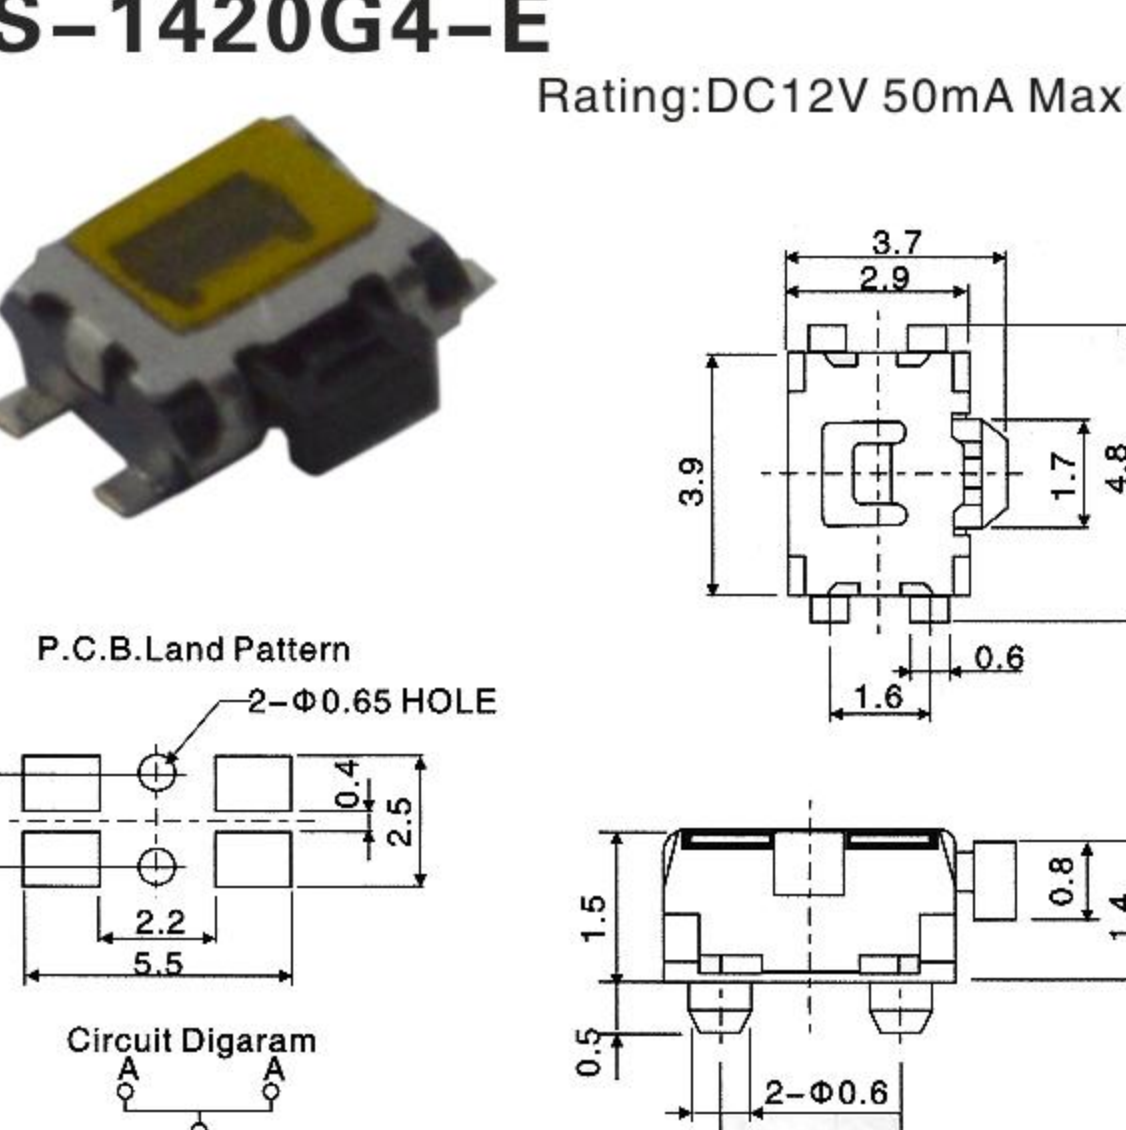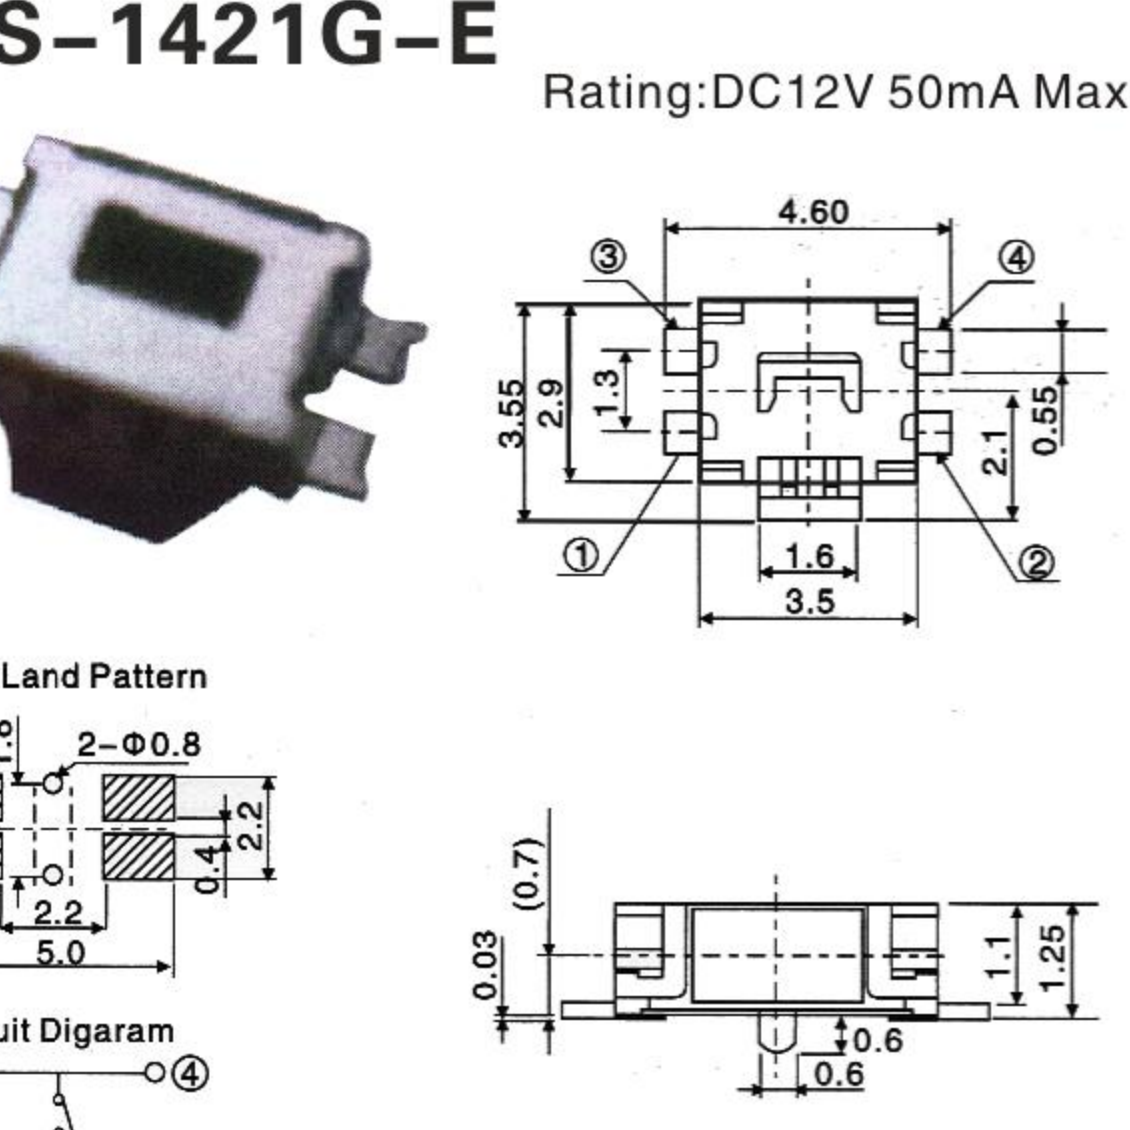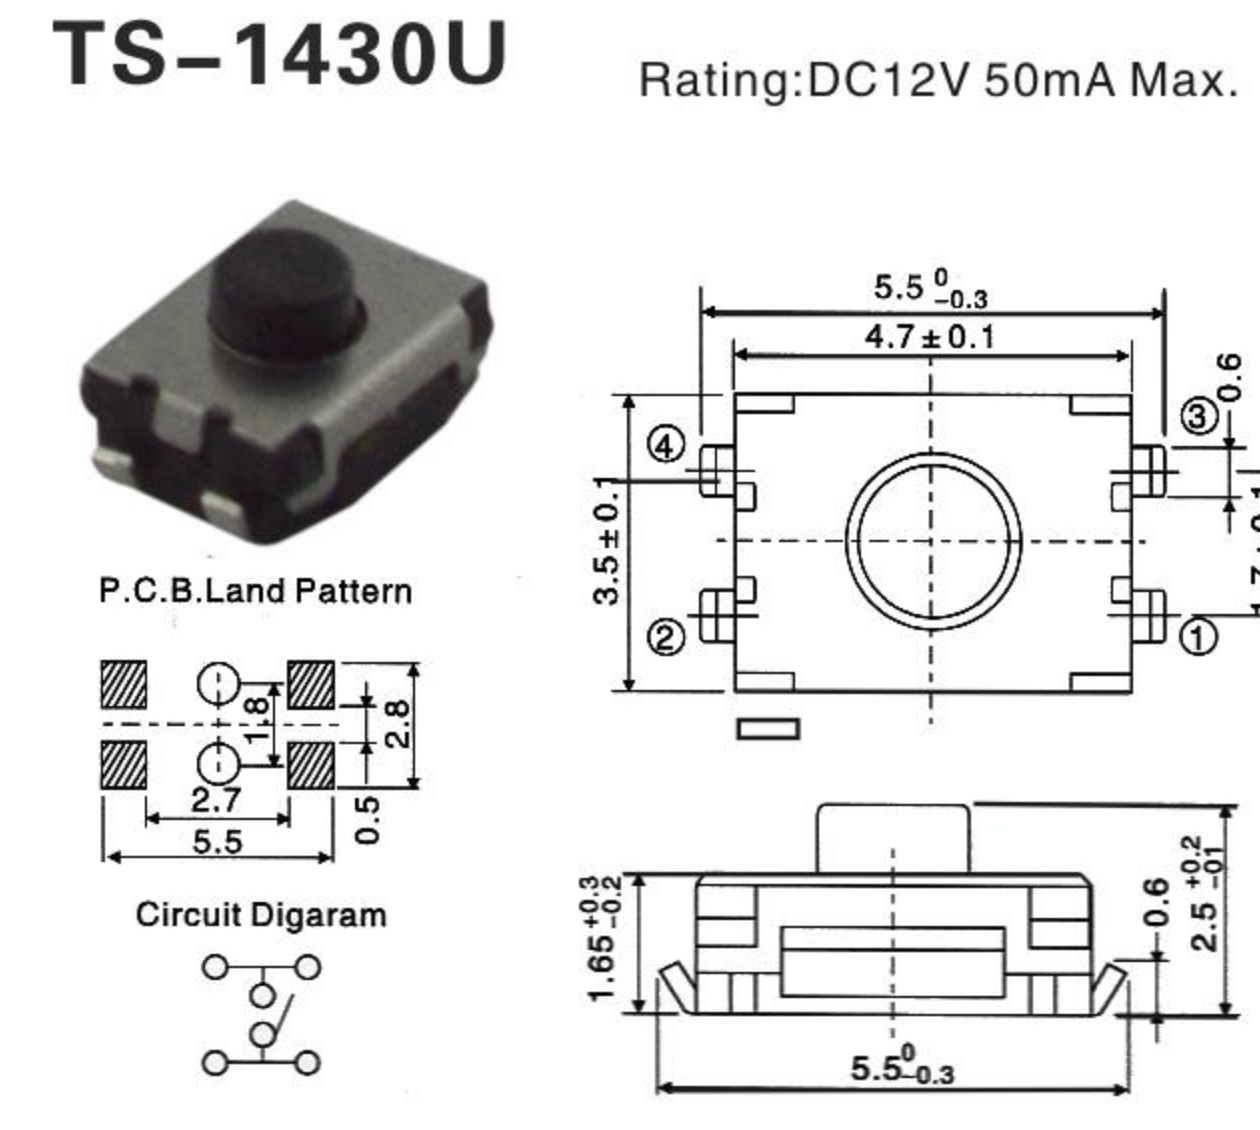TS-1197U Rating:DC12V 50mA  Circuit Diagram Pad Layout F:力度(gf) F=160/250	TS-1197PU Rating:DC15V 00mA  Circuit Diagram Pad Layout	TS-1197LU Rating:DC12V 50mA New  Circuit Diagram
TS-1198M Rating:DC12V 50mA  Circuit Diagram Pad Layout DUST TAPE CONTACT 3.5	TS-1410G-E Rating:DC12V 50mA  P.C.B.Land Pattern Circuit Diagram	TS-1410U-E Rating:DC15V 50mA  P.C.B.Land Pattern Circuit Diagram
TS-1410G4-E-1 Rating:DC12V 50mA  P.C.B.Land Pattern Circuit Diagram	TS-1420G Rating:DC12V 50mA Max.  P.C.B.Land Pattern Circuit Diagram F:力度(gf) F=250	TS-1420U Rating:DC12V 50mA Max.  P.C.B.Land Pattern Circuit Diagram F:力度(gf) F=250
TS-1420G4-E Rating:DC12V 50mA Max.  P.C.B.Land Pattern 2-Φ0.65 HOLE Circuit Diagram	TS-1421G-E Rating:DC12V 50mA Max.  P.C.B.Land Pattern Circuit Diagram	TS-1430U Rating:DC12V 50mA Max.  P.C.B.Land Pattern Circuit Diagram


TS-1440G

Rating:DC12V 50mA Max.

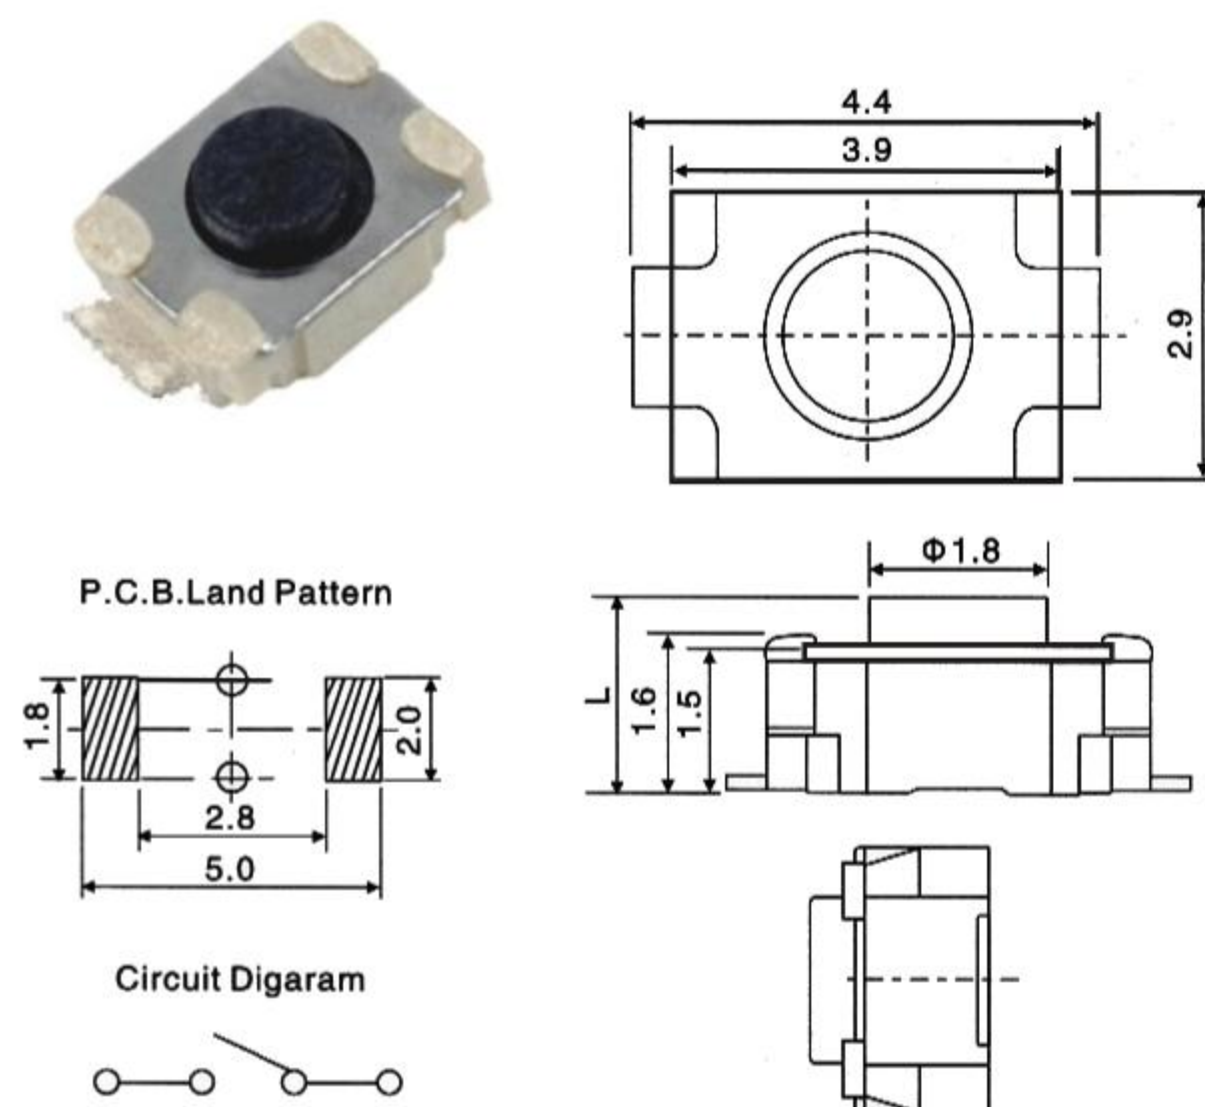


TS-1440U

Rating:DC12V 50mA Max.

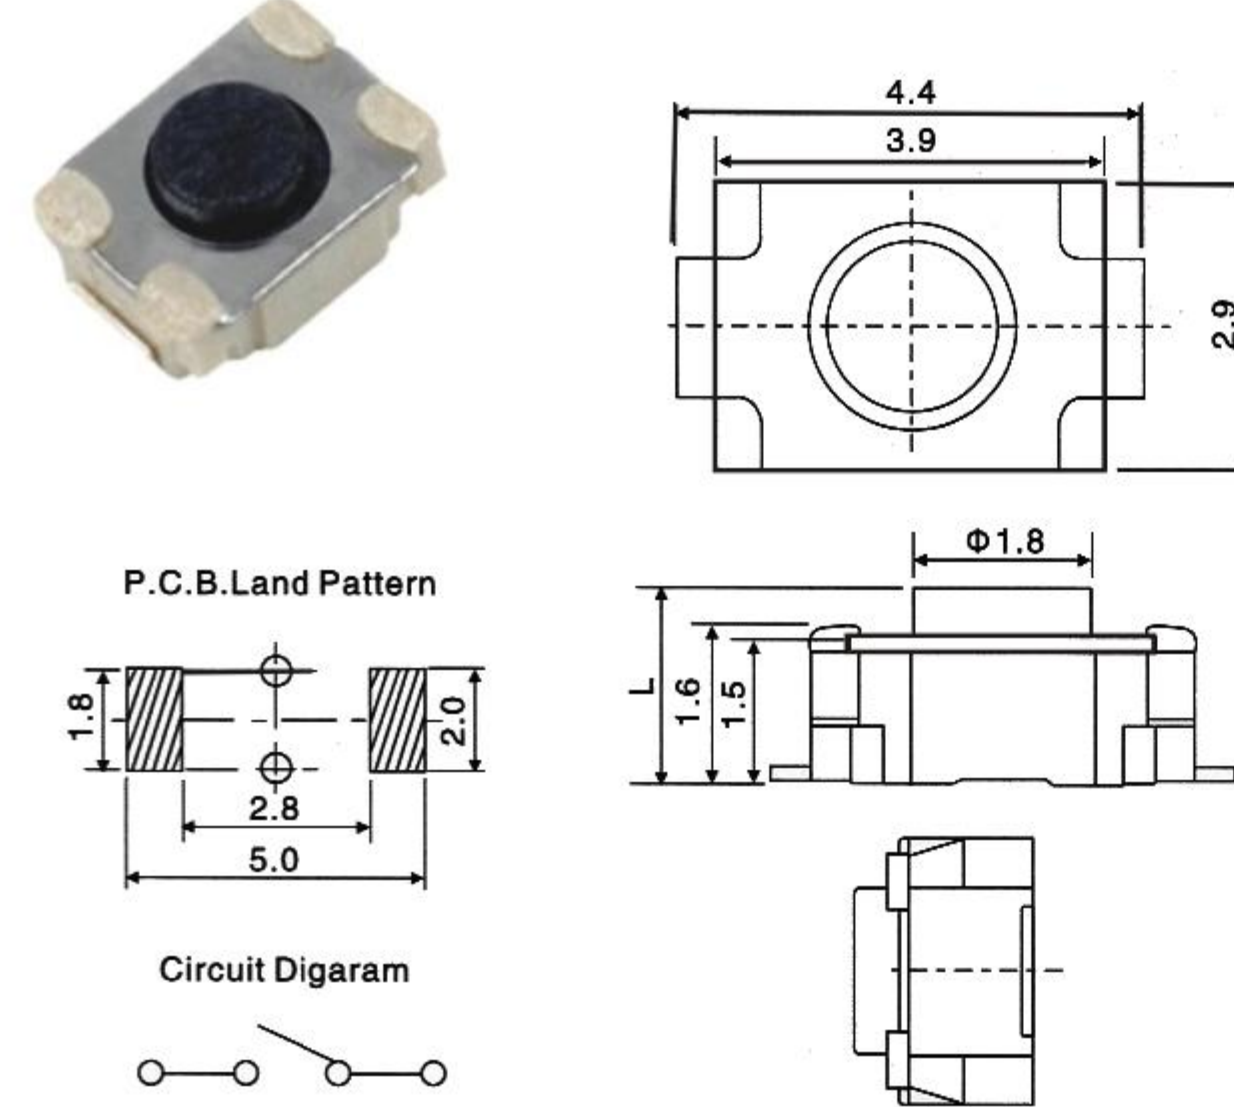


TS-1441U4

Rating:DC12V 50mA Max.

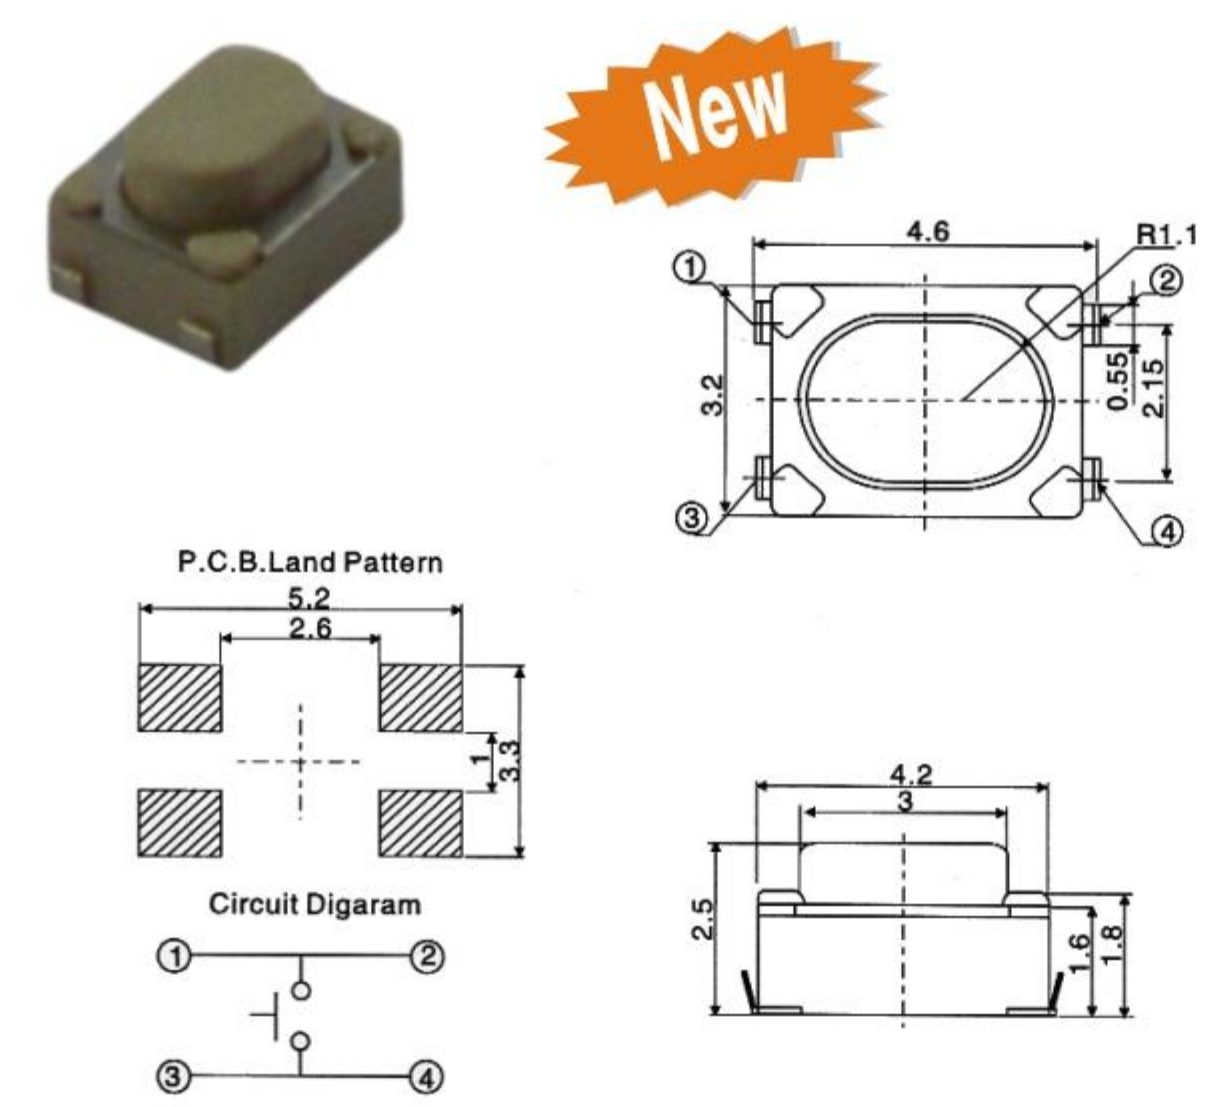


TS-1500M

Rating:DC12V 50mA

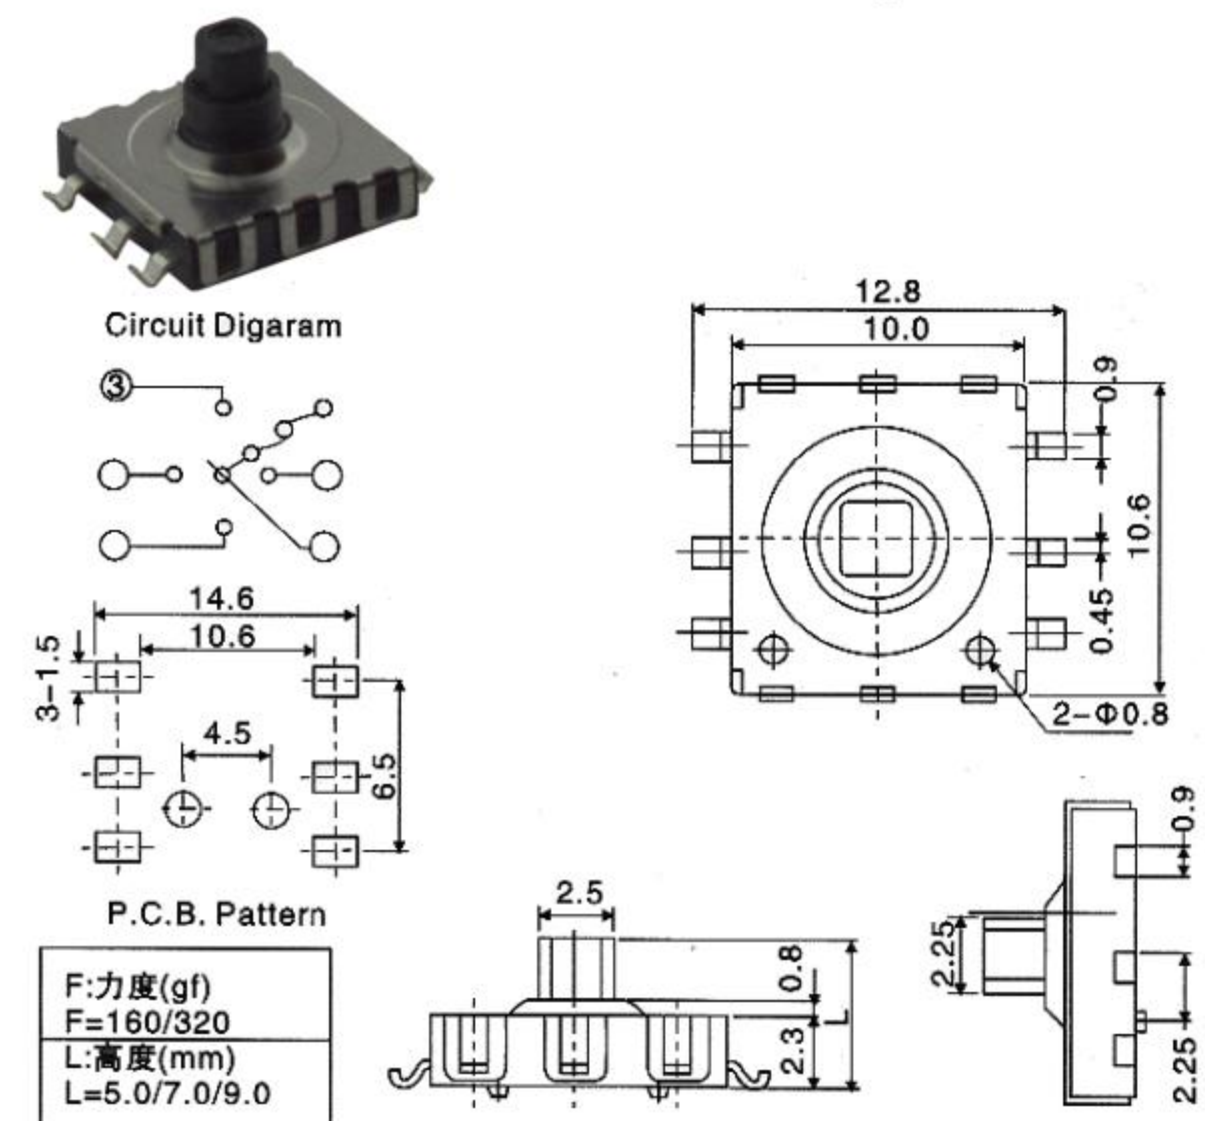


TS-1500Y

Rating:DC12V 50mA

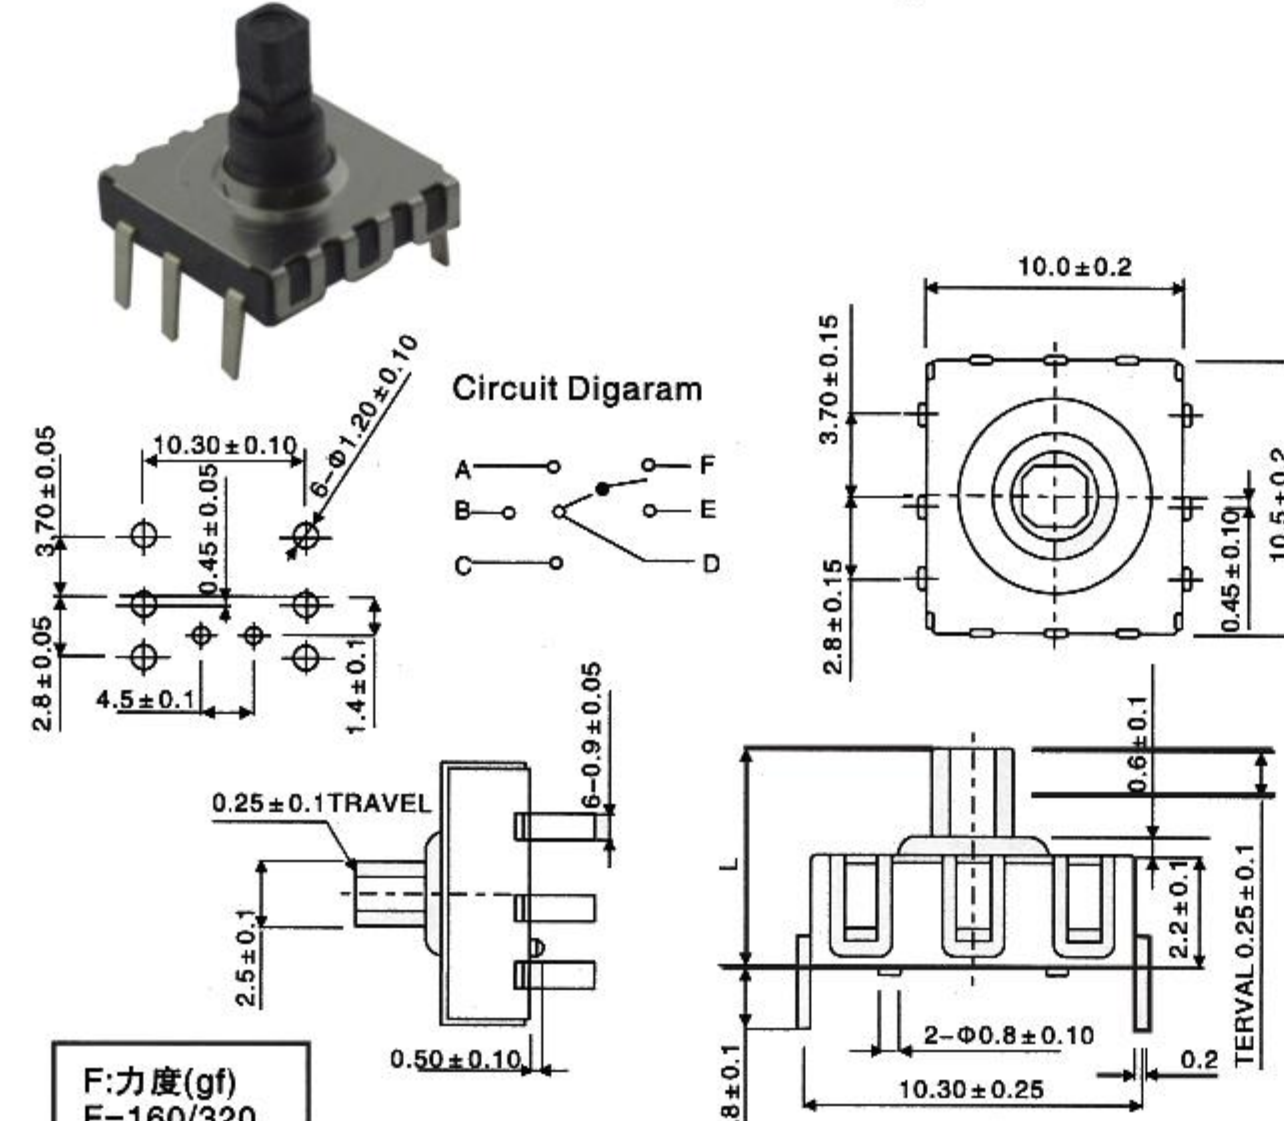


TS-1500U

Rating:DC12V 50mA

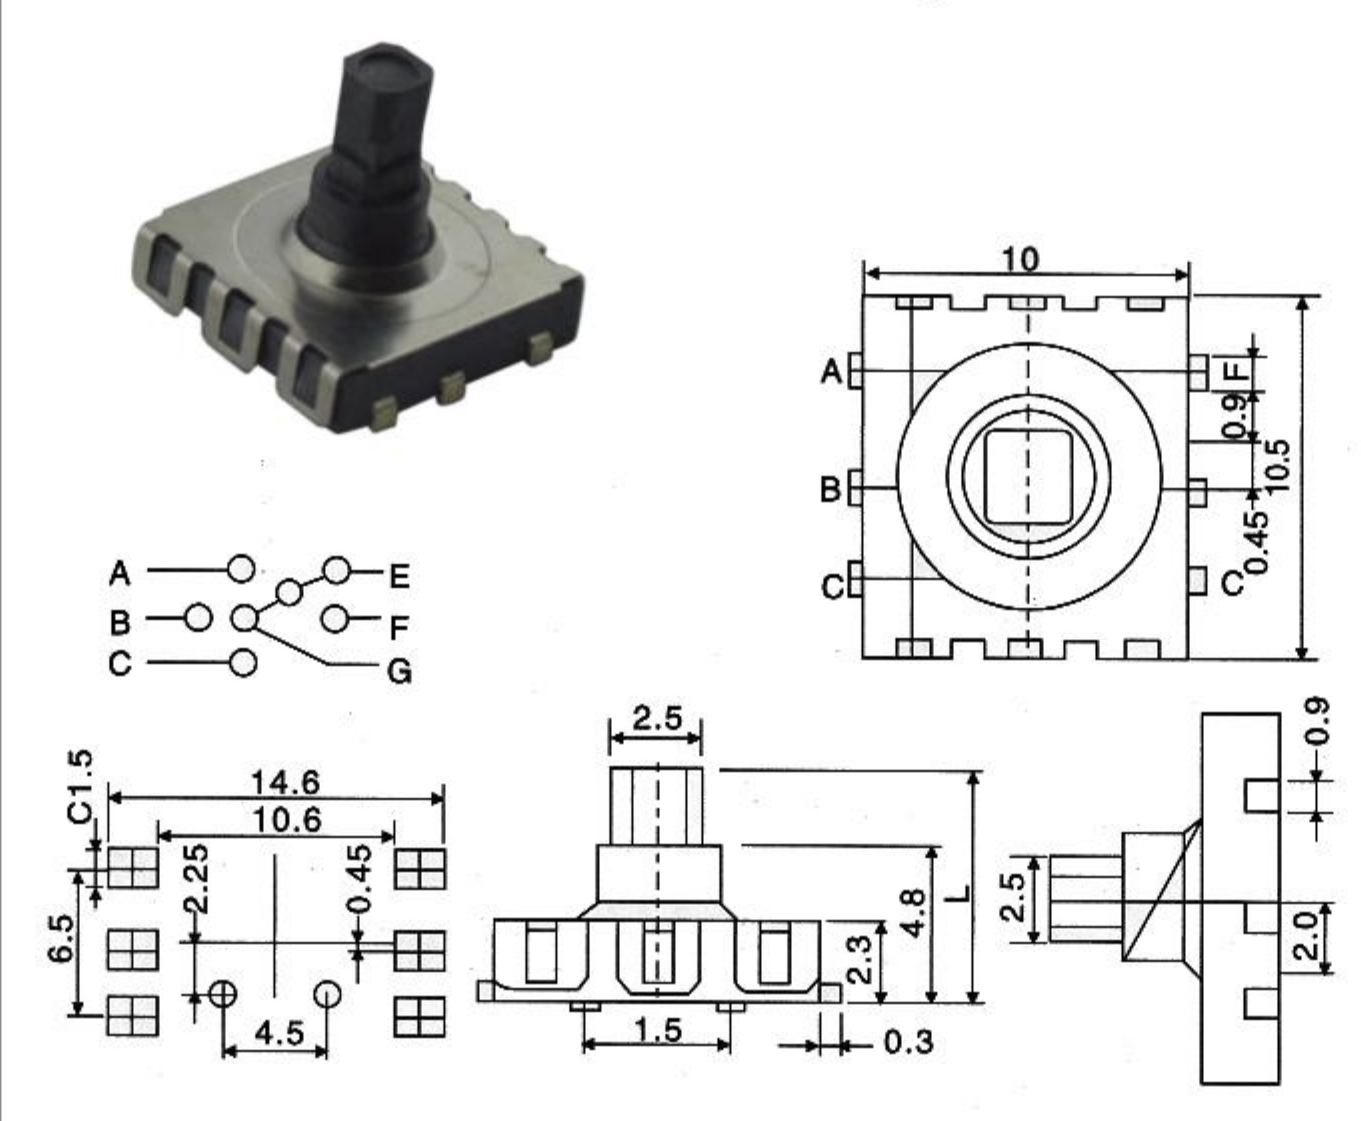


TS-1502

Rating:DC12V 50mA

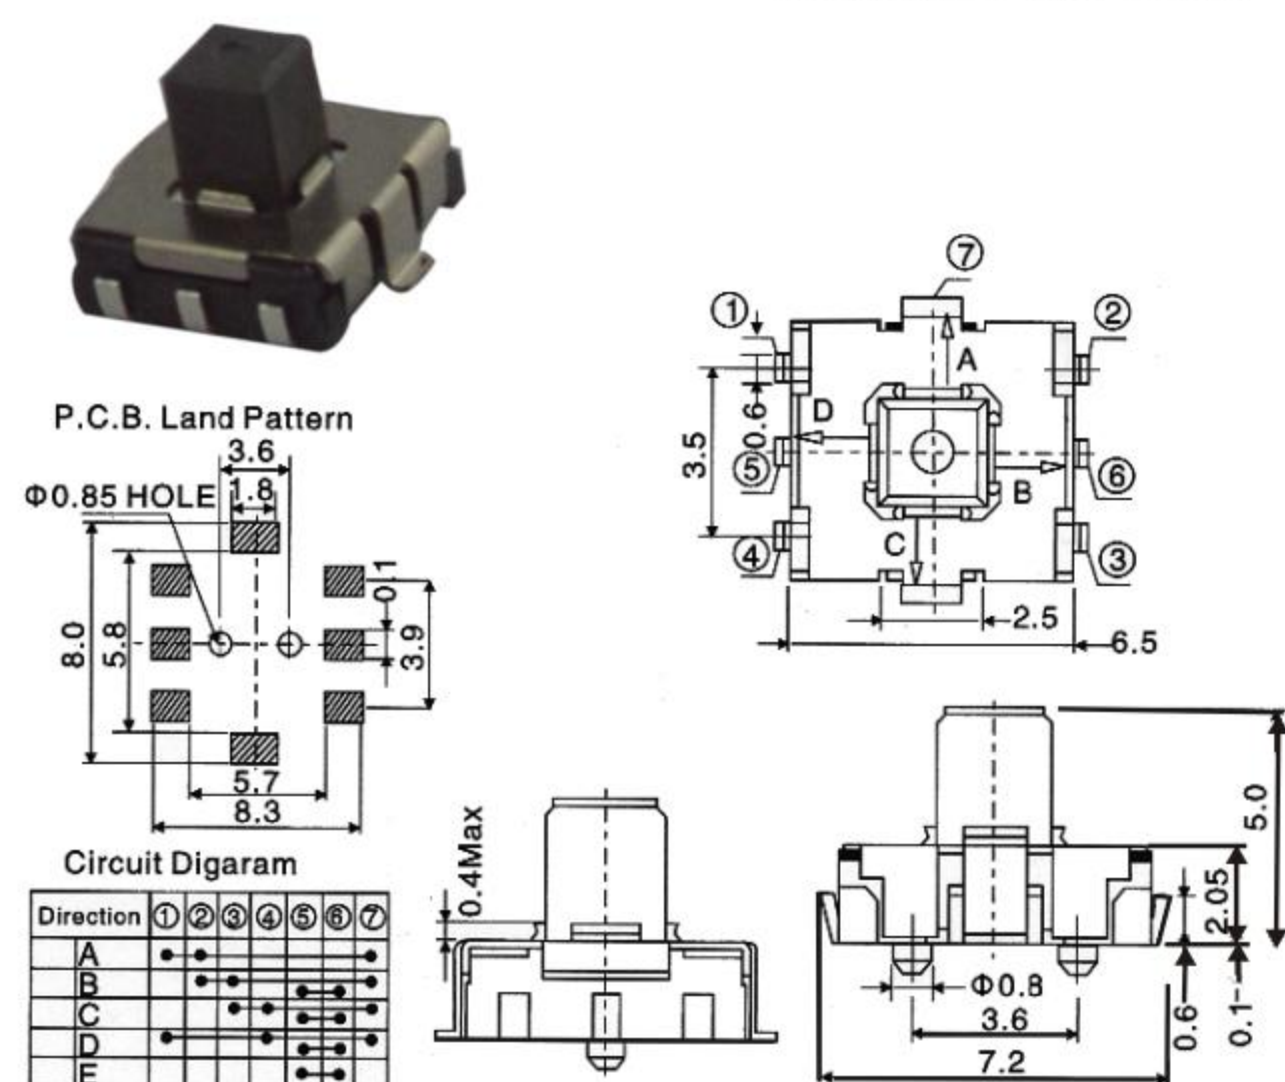


TS-1505V

Rating:DC12V 50mA

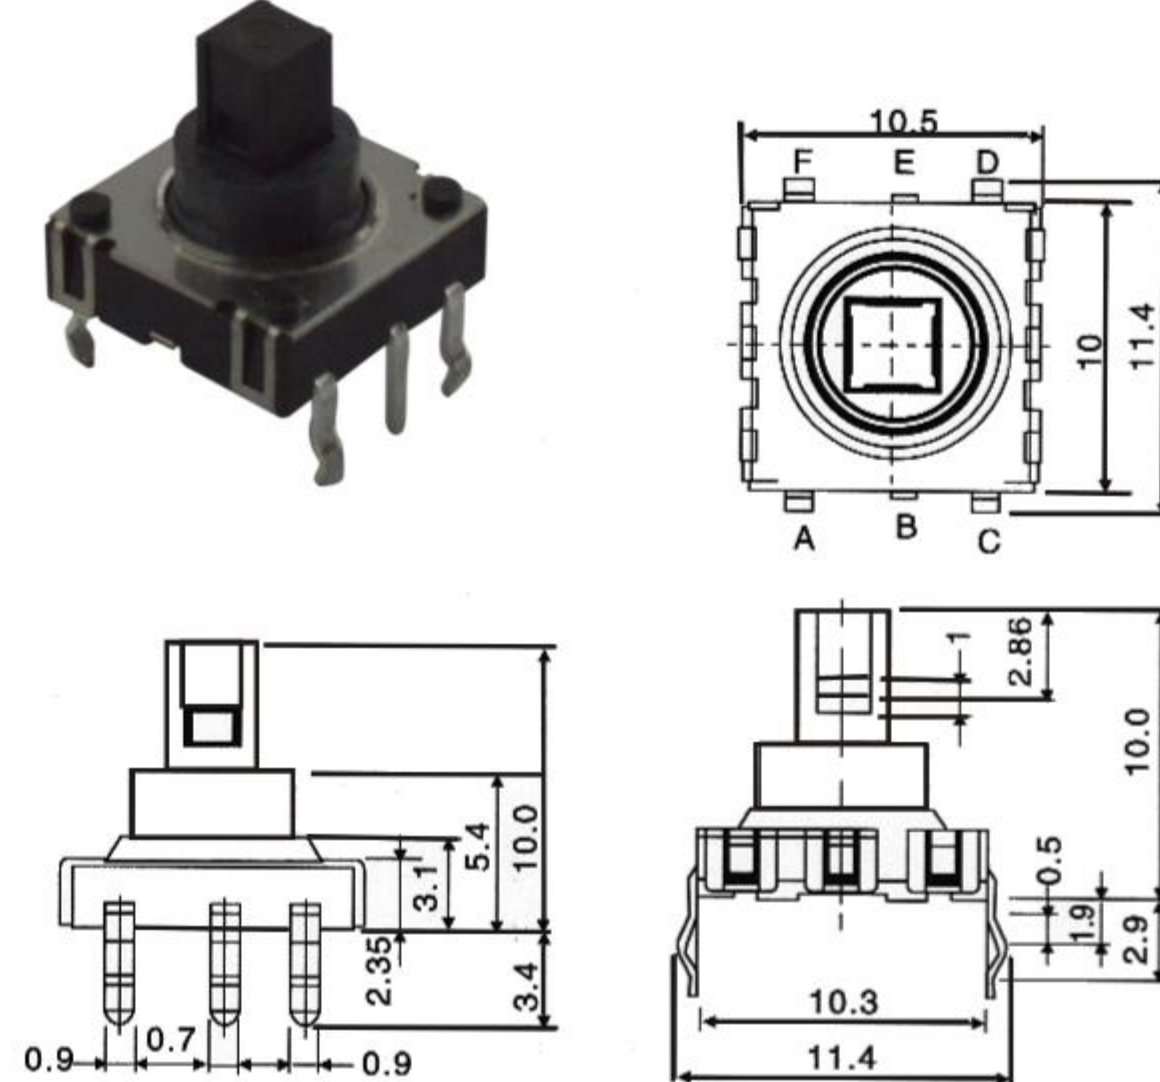


TS-1600U

Rating:DC12V 50mA

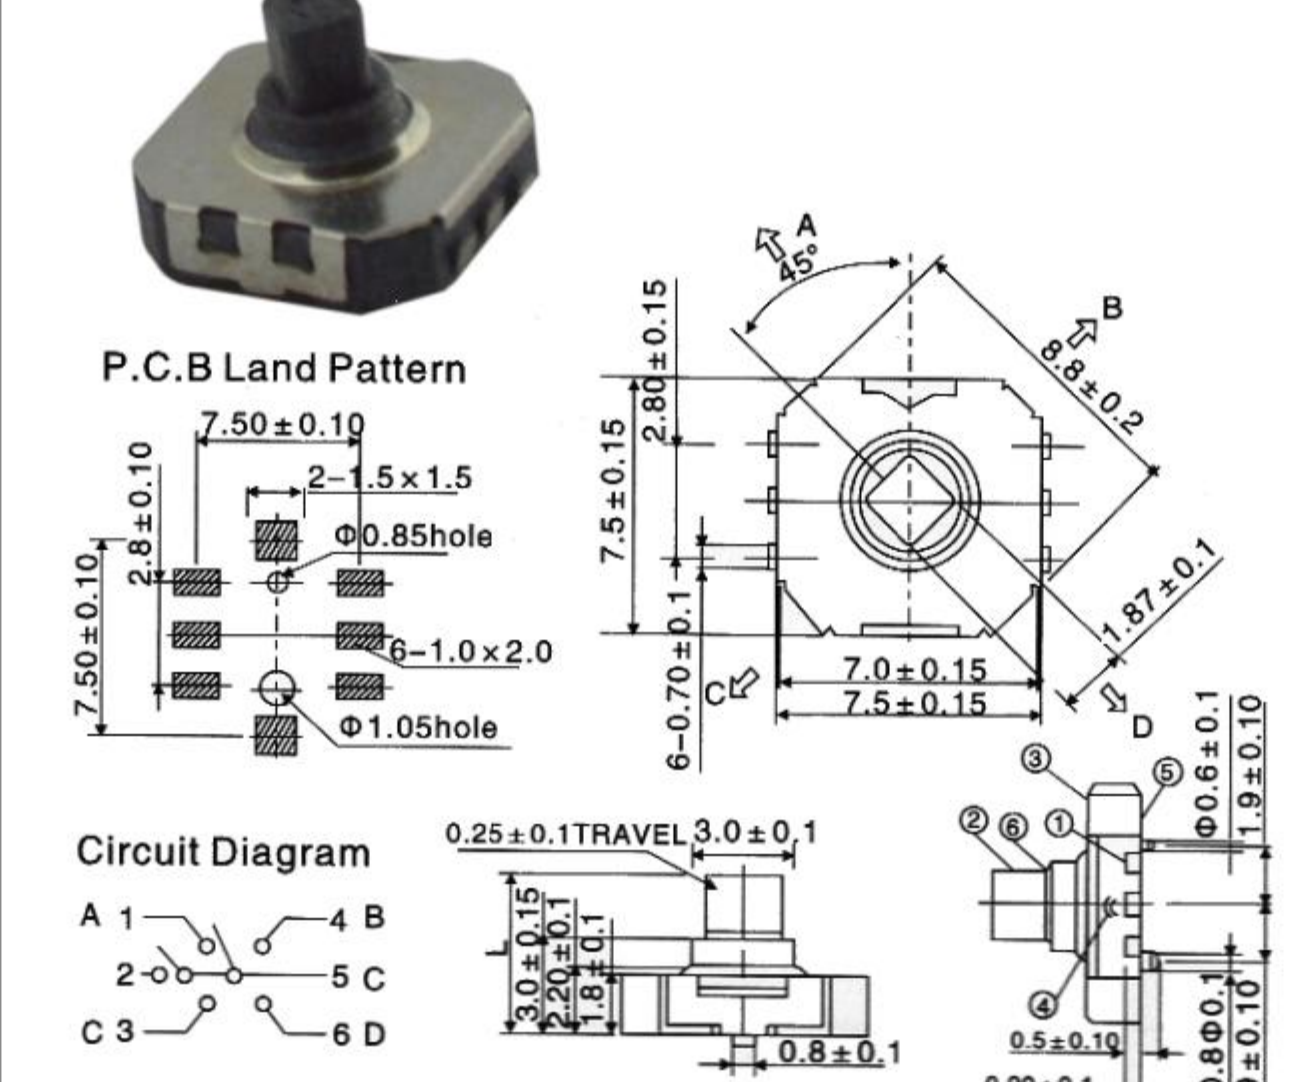


TS-1610U-E

Rating:DC12V 50mA

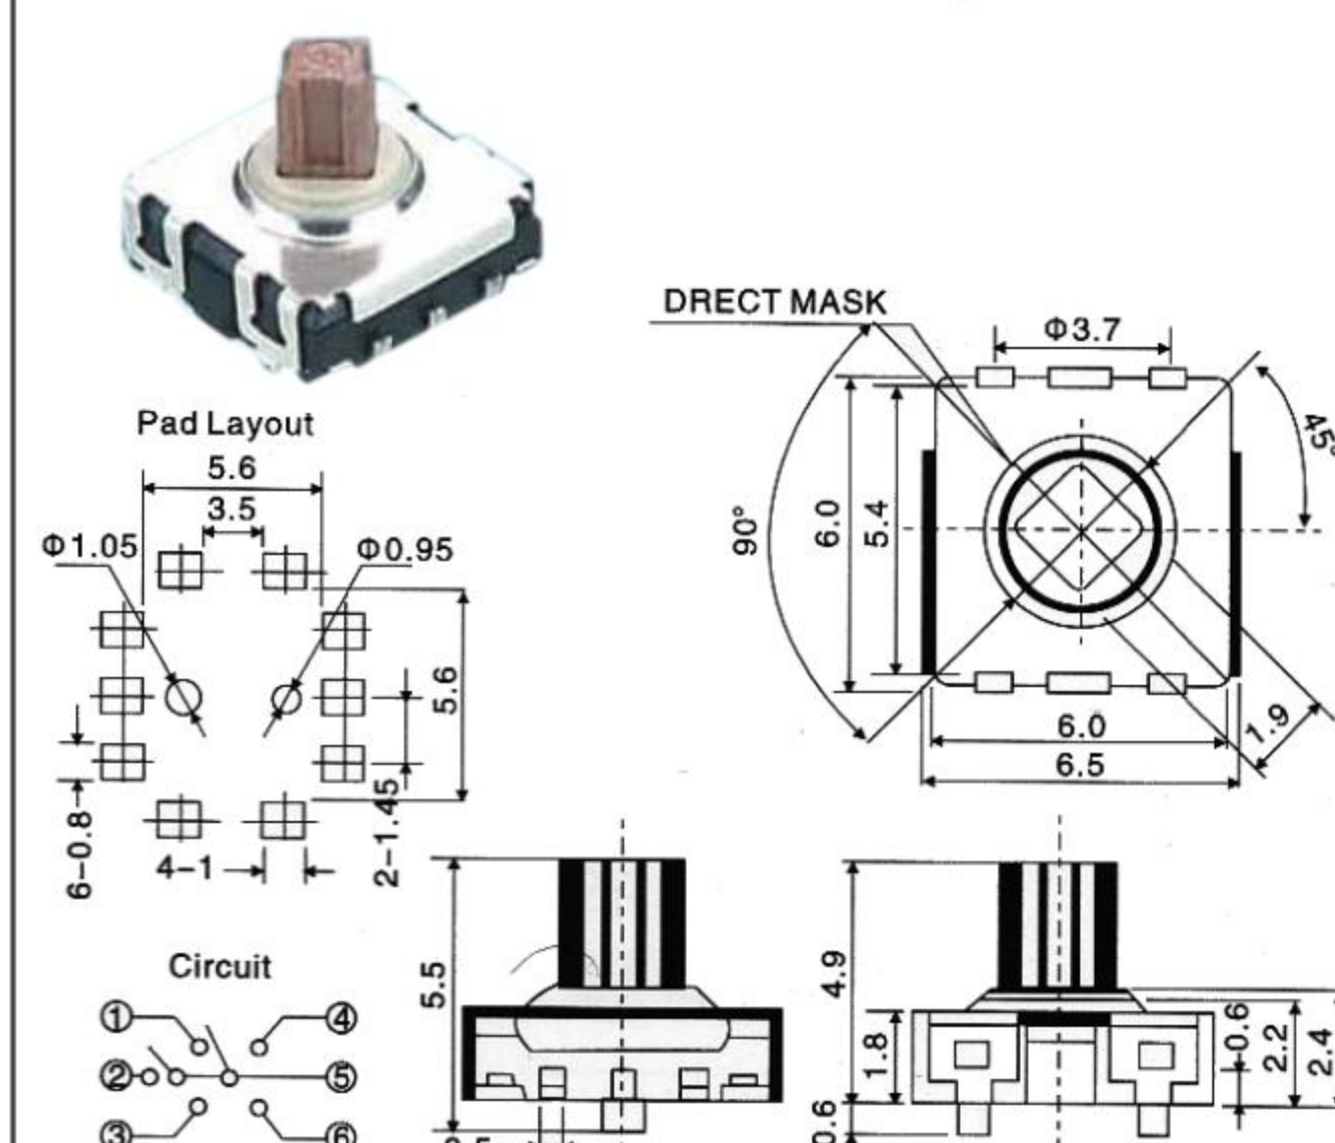

TS-1700YP

Rating:DC12V 1mA

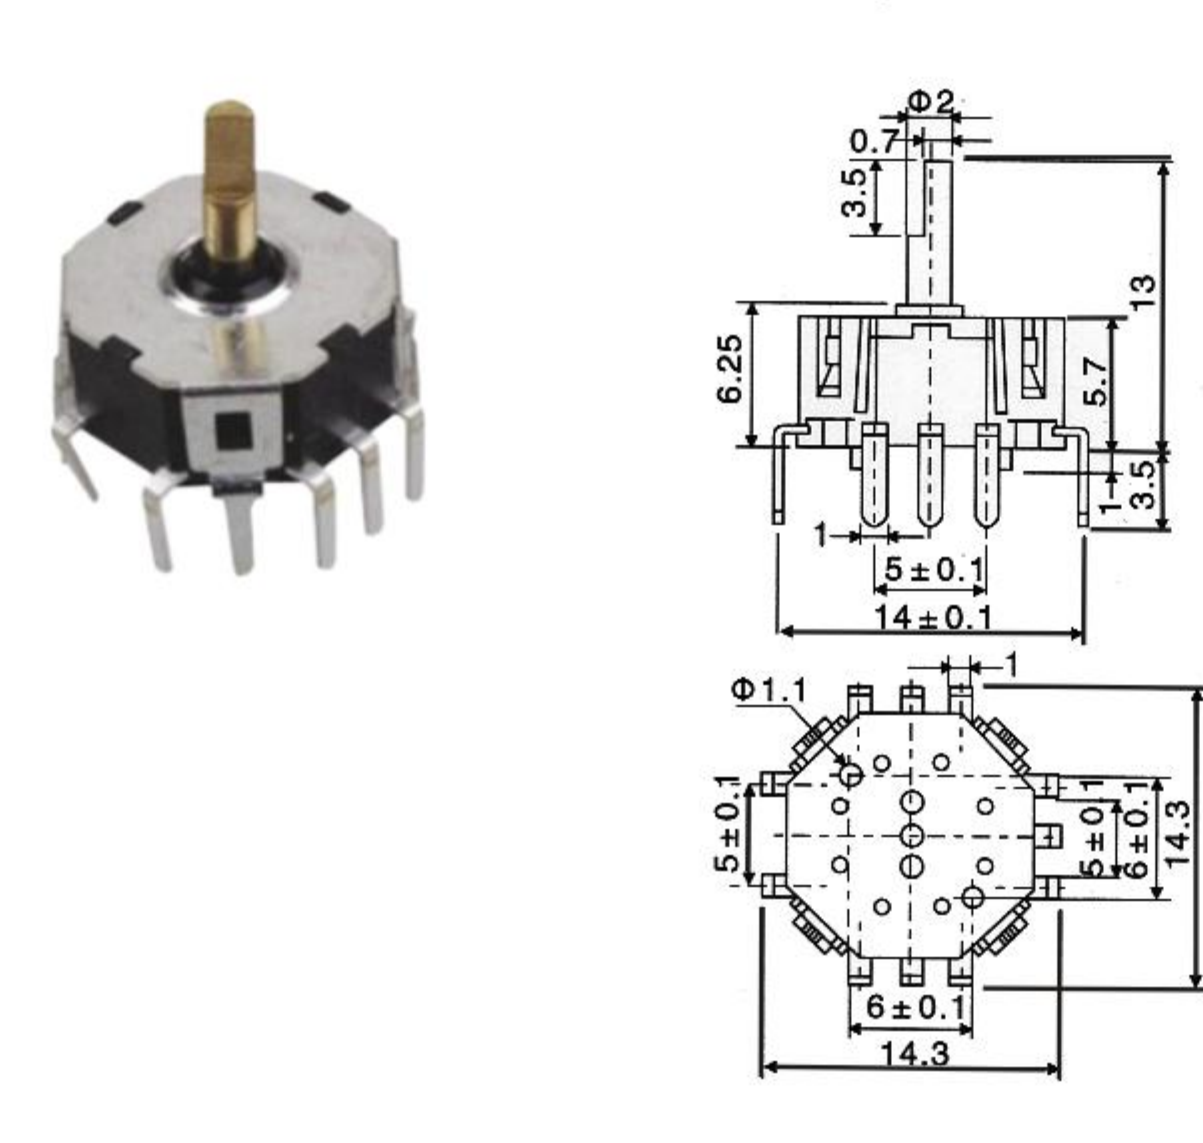

TSW-12

Rating:DC12V 50mA

